

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 22  
Township 145 N , Range 30 W , 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000601391

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/3/2014 11:30:02 AM

AS DOC #: A000601391

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep


On 04/16/2010, found a(n): 1" Iron Pipe with a 2" Brass  
cap stamped 1933, Flush with Ground

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_  
DATE

See "Statement of Evidence" for further details (on back)


(reserved for recording data)

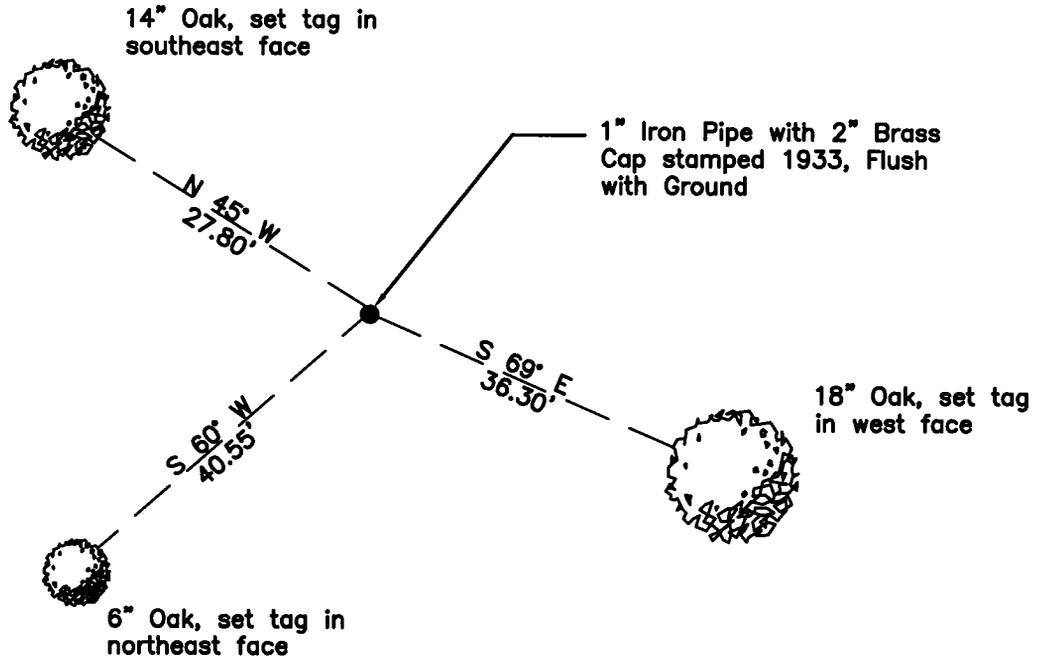

15

22

## "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17214592.930

Easting: 1276549.647

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

7/8/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 2 A000601391





**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 15 and 22 of Township 145 North,  
Range 30 West of the 5<sup>th</sup> Principal Meridian

**1874;** This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post set at this corner position, witnessed by:

Aspen 5" South 42° East, 35 links  
Aspen 6" North 85° East, 40 links

**1933;** Resurvey by GLO, Willis W. Bandy, found no remaining evidence of the original post or bearing trees. Using lost proportional method, set a 1" diameter 36" long iron post with stamped Brass Cap witnessed by:

White Birch 8" North 82 ¼° West, 19 links  
Sugar Maple 12" South 69 ½° East, 55 links

**1934;** J.A. Gjelhaug, CCC, RLS# 1337, USFS 874 forms, found a 1" dia. Brass Capped Iron Pipe 8" above ground. Information on file with the USFS.

White Birch 6" North 88° West, 18 links mrkd ¼ S 15 BT (1933 tie)  
Maple 9" South 60° East, 53¾ links mrkd ¼ S 15 BT (1933 tie)  
Aspen 6" North 65° East, 7½ links, set FSLP

**2010;** A Kadrmas, Lee & Jackson survey crew found a 1" Iron pipe with a 2" Brass Cap stamped 1933, flush with ground. Witnesses established as shown on the face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office