

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 28
Township 145 N, Range 28 W, 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601873

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/24/2014 11:39:29 AM

AS DOC #: A000601873

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 3/15/2010, found a(n): T-Post approximately 3' South
of a USFS steel sign post

- left monument as found
- removed monument (explain)
- lowered monument
- raised monument

On 7/26/2012, set a(n): 2" Galvanized Iron Pipe Over The
Top Of An 8' T-Post With A 3' Brass Cap. New Monument Is Set In
Position 1' Above Ground

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

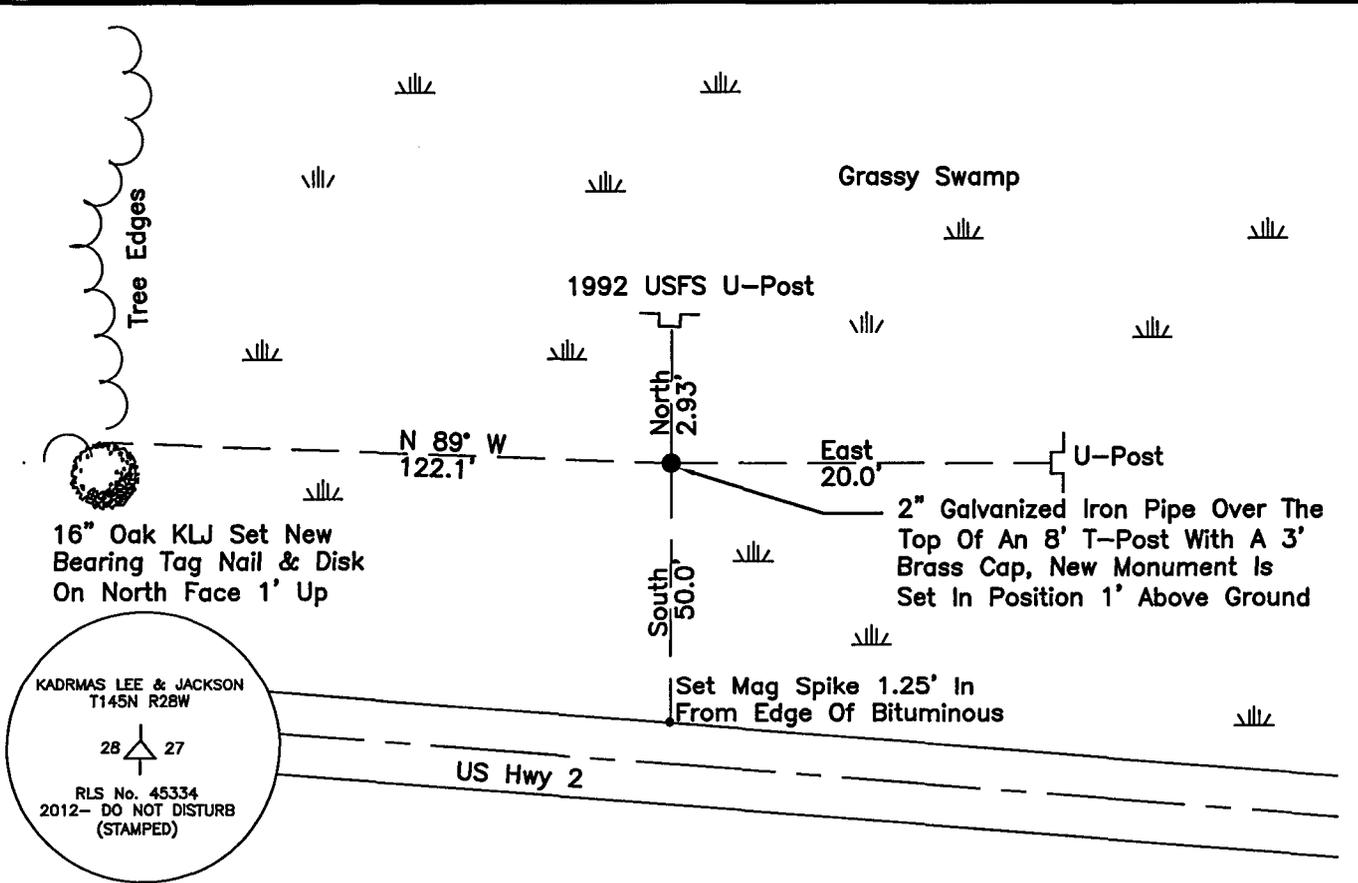

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17206201.320

Easting: 1336799.488

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/24/12
date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Quarter Corner common to Sections 27 and 28 of Township 145 North,
Range 28 West of the 5th Principal Meridian

1873; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position on a little island in a marsh which was witnessed by:

Tamarack 4", North 32° West, 140 links

1898; Great Northern Railway right-of-way plat map 1804CS5 shows a distance tie to this corner location. Information is on file with the Minnesota Department of Transportation.

1904; U.S. Army Corps of Engineers recovered this corner according to Township 145 N Range 28 W flowage map for the Lake Winnibigoshish Reservoir. Map is on file at the USFS office in Cass Lake, MN.

1928; 874 Forms, USFS personnel, found this corner location north of highway. Information is on file with the USFS office in Cass Lake.

1936; J.A. Gjelhaug, RLS #1337, USFS Book 1 of Township 145 North, Range 28 West, page 25, also recorded in old CCC Book # 88, page 15 (Tower Book), quarter corner on straight line between Section Corners witnessed by:

Aspen 10" South 83° 45' West, 139 links

Aspen 6" South 41° 30' West, 77 links

1946; State of Minnesota Department of Highways Right-of-Way Map Index map file 13-12 shows a blazed stake in place at this corner location. Information is on file with the Minnesota Department of Transportation.

1992; Curt Krause, USFS Book 1 of Township 145 North, Range 28 West, page 25, found a 3" x 48" scribed cedar post 24" above ground 69' north of the centerline of US Highway No. 2. Placed a magnetic pellet 24" down at point of post and witnessed.

8' Steel Sign Post North 3.0'

2010; A Kadrmas, Lee & Jackson survey crew found a T-Post approximately 3' south of a USFS steel sign post.

2012; Ross Wamre, RLS #45334, set a 2" Galvanized iron pipe with a 3" stamped brass cap over the found T-Post, 1' above the ground, after analysis of record and survey information accepts this T-Post monument as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Surveyors Office
United States Forest Service
Bureau of Indians Affairs – Bemidji

Cass County Engineers Office
Northern Engineering and Consulting Inc.
MnDOT – District Office 2
Bureau of Land Management (BLM)