

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 25
Township 145 N , Range 28 W , 5th P.M.
STATE OF MINNESOTA, COUNTY OF CASS



A000601874

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

4/24/2014 11:39:30 AM

AS DOC #: **A000601874**

PAGES: **2**

REC FEES: **0.00**

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep


On 7/31/2012, found a(n): 2 1/2" Galvanized Iron Pipe With A Galvanized Cap
DATE Screwed On 3' Above Surface No Markers

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument


On _____, set a(n): _____
DATE

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

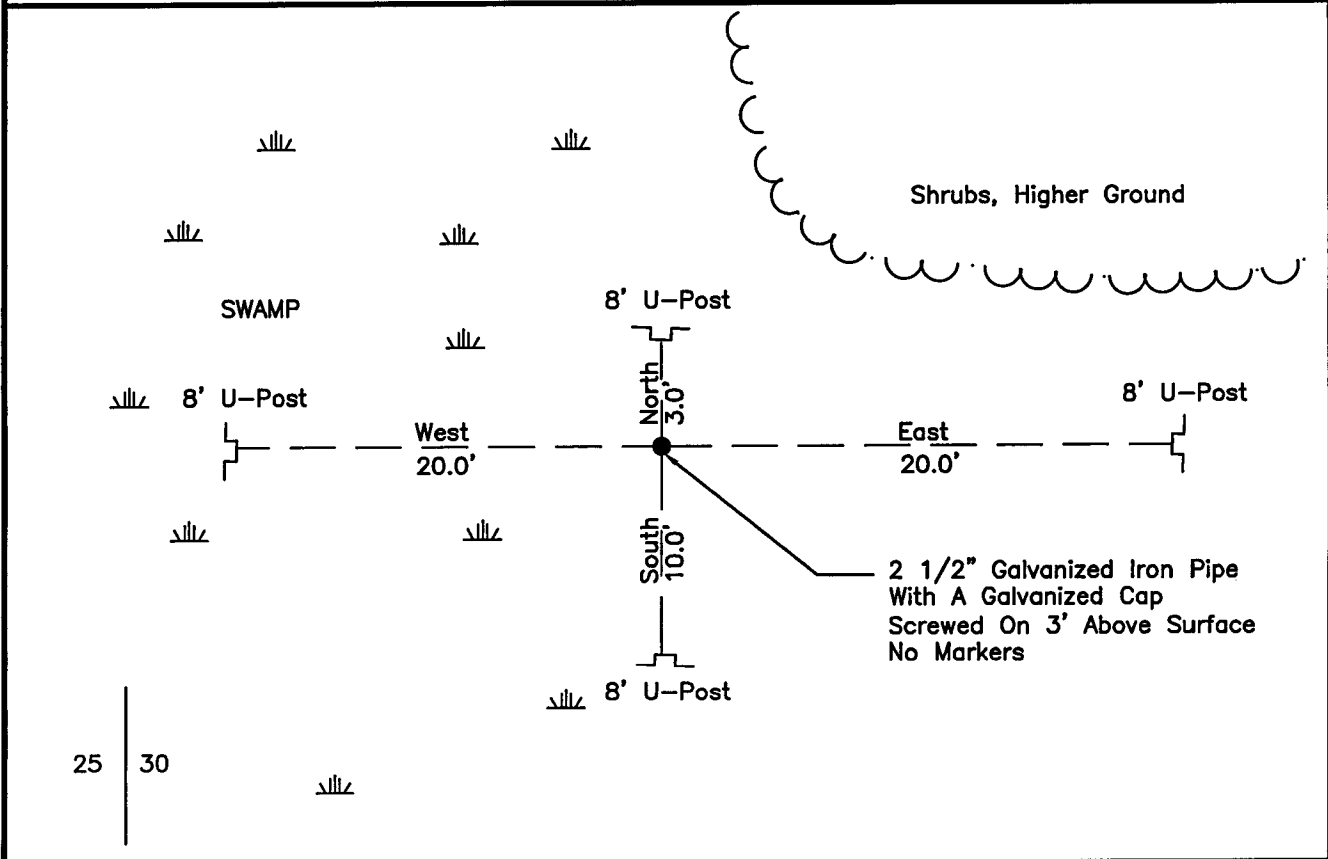

"SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)



Ties are measured to center of monument unless otherwise noted.

UNITS = Metric English

UTM COORDINATES, ZONE 15

Northing: 17206126.990

Easting: 1352413.533

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre
signature

6/24/12
date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Quarter Corner common to Section 25 of Township 145 North, Range 28 West and Section 30 of Township 145 North, Range 27 West of the 5th Principal Meridian

1873; This corner was originally established by P.H. Conger for the GLO. His field notes indicate a post was set to mark this corner position which was witnessed by:

Norway Pine 18", South 83 1/2° West, 13 links
Norway Pine 14", North 62° East, 26 links

1912; John Curo, RLS #1428, County Survey Record, Book A Pages 544-550 set at proportionate measurement a 2 1/2" x 48" galvanized iron pipe with a 3" Cap.

Norway Pine 18", South 7°06' East, 106.28'
Norway Pine 12", North 51°11' East, 32.60'

1928; D.F. Kirkmire, Forest Ranger, USFS 874 form and Book 1 of Township 145 North, Range 28 West, page 52, show he found a Norway Pine stake 3" x 3" and a Norway Pine stump 15" dia. scribe 1/4 S. He proceeded to place a metal location poster on the NE face of a 16" Norway Pine from which the corner bears North 47° East, 92 links distant.

2012; A Kadrmas, Lee & Jackson survey crew found a 2 1/2" galvanized iron pipe with a galvanized cap 3' above ground and witnessed. Witnesses found and established as shown on the face of this certificate.

2012; Ross Wamre, RLS #45334, after analysis of record and survey information accepts Curo's galvanized iron pipe as the correct perpetuation of the corner.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office
Cass County Engineers Office
Cass County Surveyors Office
Northern Engineering and Consulting Inc.
United States Forest Service
MnDOT – District Office 2
Bureau of Indians Affairs – Bemidji
Bureau of Land Management's (BLM) Northeastern States Field Office