

Index No. Z-5

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 31  
 Township 145 N, Range 28 W, 5th P.M.  
 STATE OF MINNESOTA, COUNTY OF CASS



**A000601882**

**OFFICE OF THE COUNTY RECORDER  
 CASS COUNTY, MINNESOTA  
 CERTIFIED, FILED, AND/OR  
 RECORDED ON**

**4/24/2014 11:39:38 AM**

**AS DOC #: A000601882**

**PAGES: 2**

**REC FEES: 0.00**

**KATHRYN M. NORBY  
 CASS COUNTY RECORDER**

**BY SR \_\_\_\_\_ Dep**

On \_\_\_\_\_, found a(n): \_\_\_\_\_




- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On 03/14/2012, set a(n): 3.5" Aluminum Cap on 3/4"x 4' Rebar. Flush with Surface

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

NOTE: Hardwood Forest

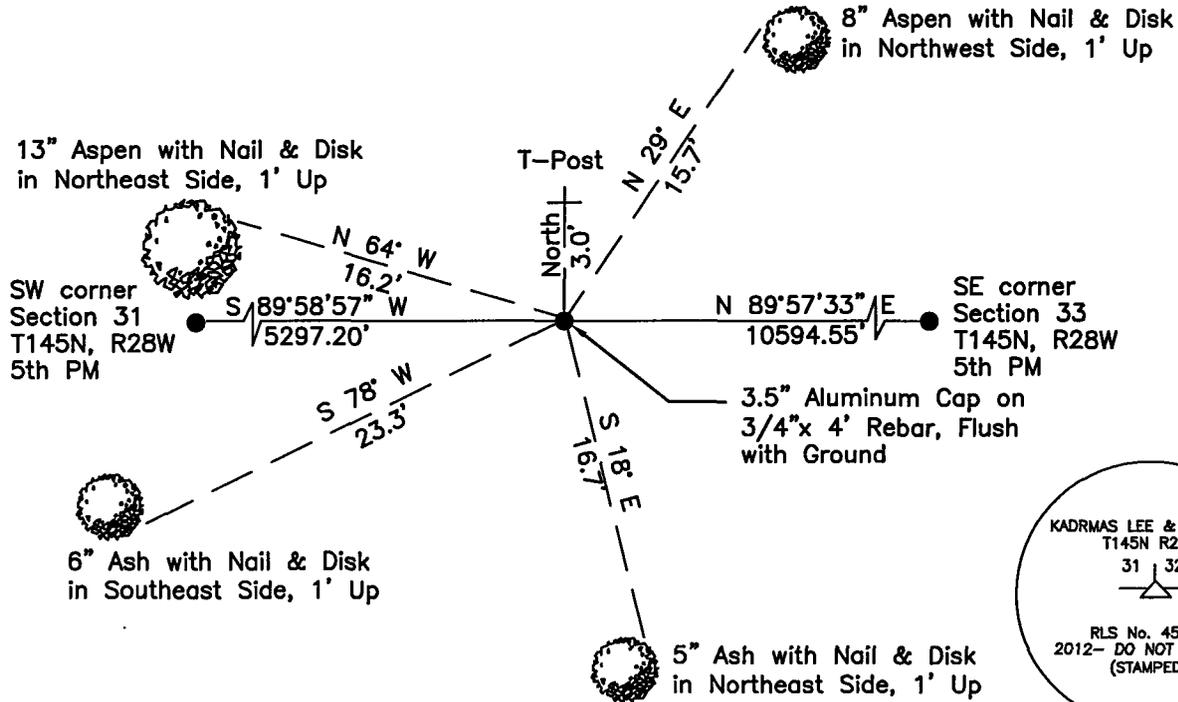

**"SKETCH OF REFERENCE TIES"**  
 (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17198282.470

Easting: 1326056.851

NAD 83/1996 Adjustment.  
 Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
 signature

6/18/13  
 date

Ross Wamre, Minnesota License No. 45334



STATEMENT OF EVIDENCE: Standard Section Corner common to Sections 31 and 32 of Township 145 North, Range 28 West of the 5<sup>th</sup> Principal Meridian

**1871;** This corner was originally established by G.R. Stuntz his field notes indicate a post set at this corner position, witnessed by:

Fir 5", North 35° East, 73 links

White Pine 10", North 70° West, 70 links

**1967;** James Ebstrom, USFS personnel, USFS Book 1 of Township 145 North, Range 28 West, page 5, found no evidence of original corner. Placed a FSLP at approximate corner location.

**2010;** A Kadrmas, Lee & Jackson survey crew found no evidence of the original corner or the F.S.L.P. placed by Ebstrom.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information set a 3.5" Aluminum Cap on a ¾" x 4' Rebar, flush at single proportionate measure along the township line. Witnesses were established as show on the face of this certificate.

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office

Cass County Engineers Office

Cass County Surveyors Office

Northern Engineering and Consulting Inc.

United States Forest Service

MnDOT – District Office 2

Bureau of Indians Affairs – Bemidji

Bureau of Land Management's (BLM) Northeastern States Field Office