

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 36  
Township 145 N, Range 28 W, 5th P.M.  
STATE OF MINNESOTA, COUNTY OF CASS



A000601889

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/24/2014 11:39:45 AM

AS DOC #: A000601889

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR Dep


On 05/14/2010, found a(n): 2 1/4" Galvanized Iron Pipe With  
a 3" Well Cap

- left monument as found
- lowered monument
- removed monument (explain)
- raised monument

On \_\_\_\_\_, set a(n): \_\_\_\_\_

See "Statement of Evidence" for further details (on back)

(reserved for recording data)

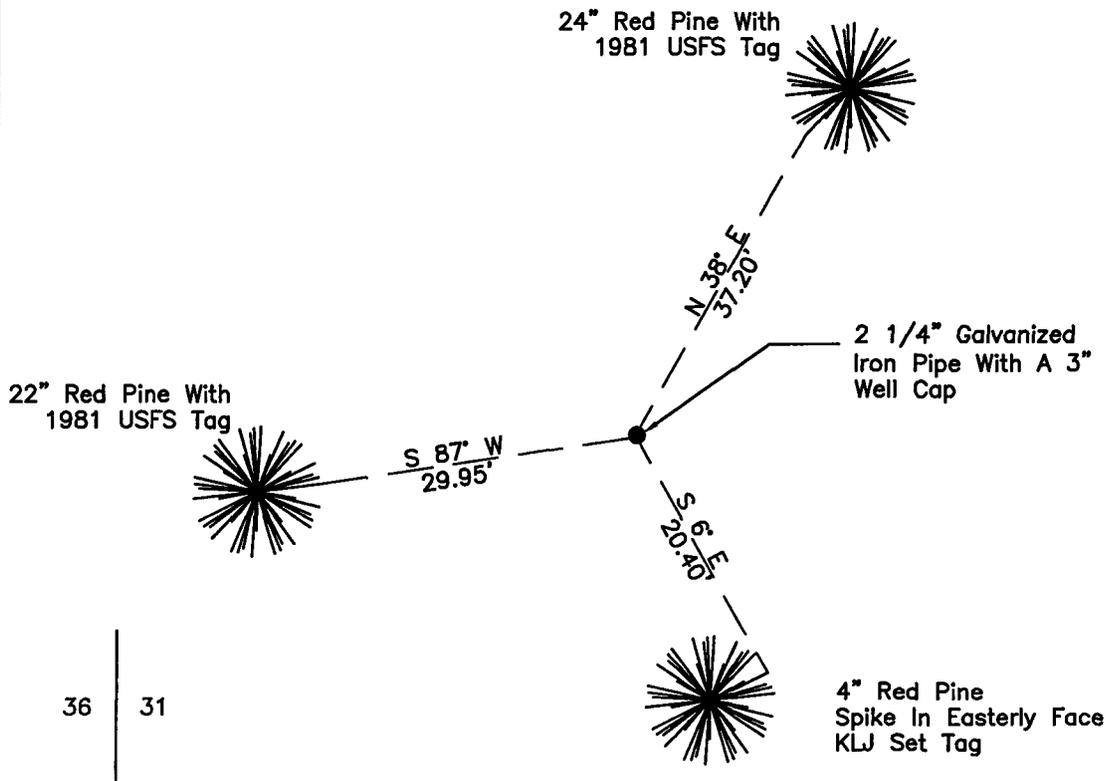

### "SKETCH OF REFERENCE TIES" (not to scale - bearings are magnetic)

Ties are measured to center of monument unless otherwise noted.

UNITS =  Metric  English

UTM COORDINATES, ZONE 15

Northing: 17200744.160

Easting: 1352894.681

NAD 83/1996 Adjustment.

Obtained by RTK GPS observations.

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision, and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Ross Wamre  
signature

4/18/13  
date

Ross Wamre, Minnesota License No. 45334

Page 1 of 3 A000601889



**STATEMENT OF EVIDENCE:** Quarter Corner common to Section 36 of Township 145 North, Range 28 West and Section 31 of Township 145 North, Range 27 West of the 5<sup>th</sup> Principal Meridian.

**1873;** This corner was originally established by P.H. Conger for the GLO. His field notes indicate that this corner position was marked with a post and witnessed by:

J. Pine 14" North 64° West, 16 Links  
J. Pine 12" South 81° East, 14 Links

**1912;** County Survey Record Book A, pages 544-550 show that John Curo, RLS # 1428, set by proportionate distance, a 2½" x 48" galvanized iron pipe with a 3" cap witnessed by:

Norway Pine 10" South 76° East, 44.77'  
Norway Pine 18" South 34° West, 18.09'  
Norway Pine 20" North 5°-11° East, 245.80' marked by someone else, notes do not indicate who.

**1929;** USFS 874 form, on file at the USFS office in Cass Lake, MN show Edward Iverson, Estimator, found a 2¼ galvanized pipe, 16" above the ground in good condition witnessed by:

Norway Pine Stub 16" South 45° West, 2 chains  
Norway Pine Stub 9" North 30° West, 55 links set FSLP

**1955;** Harold Curo, RLS #3417, Curo Field Book 245, Page 30 on file at the Cass County surveyors office, shows an iron monument at this corner location in a sketch of Section 36 and 31 T145N, R 27W.

**1981;** USFS notes Book 3 of Township 145 North, Range 27 West, page 7, show that K. Whitehorn, RLS # 14677, and R. Oleson, chained north from the township corner (SW Sec 36, T145N, R27W) 808m and found a 63cm galvanized steel pipe with 76cm well cap up 30.5cm, 30.5m South of the Southerly edge of the pipeline scar and 18m West of the Centerline of a forest trail witnessed by:

Red Pine 36cm North 87° West, 9.13m scribe visible, set nail in N face  
Red Pine 37cm East, 97cm  
Red Pine 36cm North 38° East, 11.34m set nail in NW face  
Red Pine Stump ±15cm North 61° East, 29.5m blaze style ax mark  
Red Pine Stump 30cm South 47° East, 16.02' found nail in SW face  
Norway Pine Snag 30½cm South 74° East, 31.4m definite marks on the NW face

**2010;** A Kadrmas, Lee & Jackson survey crew found a 2 1/4" Galvanized Iron Pipe with a 3" well cap, witnesses found and established as shown on the face of this certificate.

**2012;** Ross Wamre, RLS #45334, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.



Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Engineers Office
- Cass County Surveyors Office
- Northern Engineering and Consulting Inc.
- United States Forest Service
- MnDOT – District Office 2
- Bureau of Indians Affairs – Bemidji
- Bureau of Land Management's (BLM) Northeastern States Field Office