



A000602201

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

5/8/2014 11:38:12 AM

AS DOC #: A000602201

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR Dep

Twp 141 Rge 26 Index No. Z.0-13.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Southeast corner of Section 33, Township 141 N., Range 26 W., 5th P.M.
 State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 17 Aug. 2011 found a 2 inch square steel tube, with aluminum cap, 17 feet±,
South of centerline County Road Number 7.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

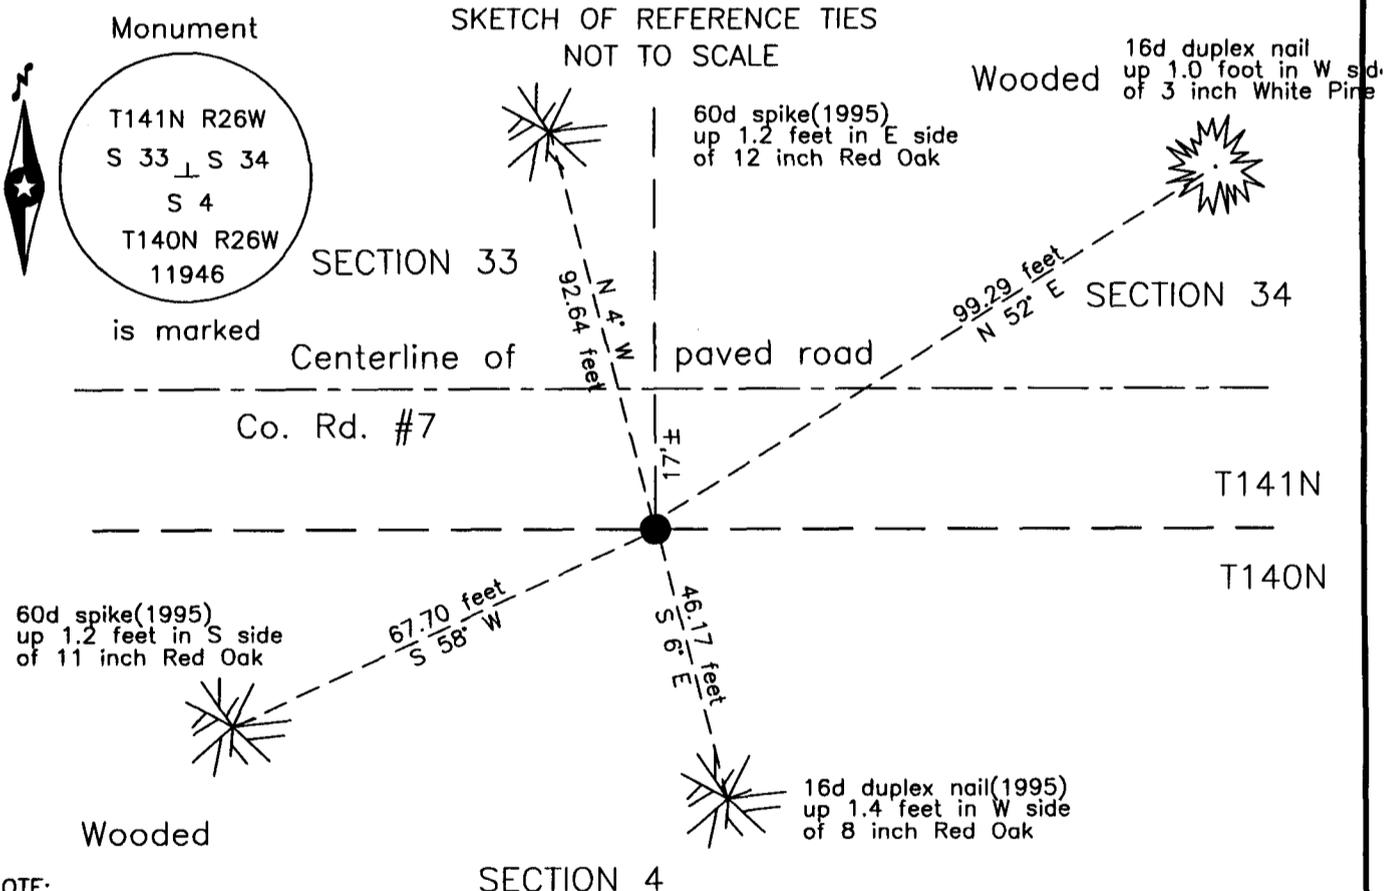

NOTE:
 All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
 Date 5/7/14 MN License No. 21367



Index No. Z.0-13.0

Statement of Evidence

Standard Southeast corner of Section 33, Township 141 North, Range 26 West, 5th Principal Meridian.

- Aug. 1863 Johnson and Thornton, General Land Office (GLO) Deputy Surveyors, running the 10th Standard Parallel, set a post for the original corner and referenced it as follows:
 22" Y. Pine N 37 1/2° E 17 links (11.22 feet) 8" Aspen N 72° W 24 links (15.84 feet)
- May 1871 Allen and Putnam, GLO Deputy Surveyors, notes for the subdivision of Township 141 North, Range 26 West, began line north at the subject corner.
- May 1871 Allen and Putnam, GLO Deputy Surveyors, notes for the subdivision of Township 140 North, Range 26 West, set closing corner 2.52 chains east from the subject corner.
 The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- Dec. 1911 J.W. Curo, Cass County Surveyor, LS 1428, Curo Book 93, page 27, on file in the CCHD/SO, states "15840 set temp S.E. cor sec 33-141-26, nothing here so continue".
- 1938 Civilian Conservation Corps (CCC), Washburn Lake Camp, Book Number 20, page 9, on file in the CCHD/SO, states 209.4' West of NE 4 – 4" sq red oak stake for USFS approx cor.
- Oct. 1995 C.R. Krause, technician, United States Department of Agriculture Forest Service (USFS), Township Book #1, page 72, on file in the USFS Cass Lake Office and the CCHD/SO, states "Fd. 2" x 2" tube monument – in place with cap marked. 1.4' south of edge of blacktop on cass co. #7 17.5' south of centerline of County Road #7 cap is .40 below shoulder of road." and notes witnesses as follows:
 13" R. Oak S 58° W 67.70 feet 7.5" R. Oak S 6° W 46.17 feet
 12" R. Oak N 4° W 92.64 feet Sign Post South 33.25 feet
- Aug. 2011 B. Hippen, technician and P. Swentkofske, CCHD equipment operator, records of the CCHD/SO, prior to reconstruction of CSAH # 007, excavated a 12 foot east-west by 8 foot north-south area based on record dimensions. The dig was 3 feet deep to natural soil. A Telephone cable, down 1.5 feet, on north side of excavation. No evidence of original corner was recovered.
- Aug. 2011 B. Hippen, technician, records of the CCHD/SO, reset the telspar monument from the 1995 witnesses and added the following:
 3" W. Pine N 52° E 99.29 feet

The recovered and established witnesses for this corner position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered in 2011 by the CChd/SO, is the accepted location of this corner.

County Coordinates (Cass County North)
Northing 163433.99
Easting 562706.05