



A000603430

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

6/26/2014 12:53:22 PM

AS DOC #: A000603430

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Page 1 of 2 A000603430

Twp 137 Rge 32 Index No. L.0-21.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 14, Township 137 N., Range 32 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 25 Aug 2004 placed 3/4 inch iron rod, with survey cap,
100 feet± in to Tag Alder swamp.


SKETCH OF REFERENCE TIES
NOT TO SCALE

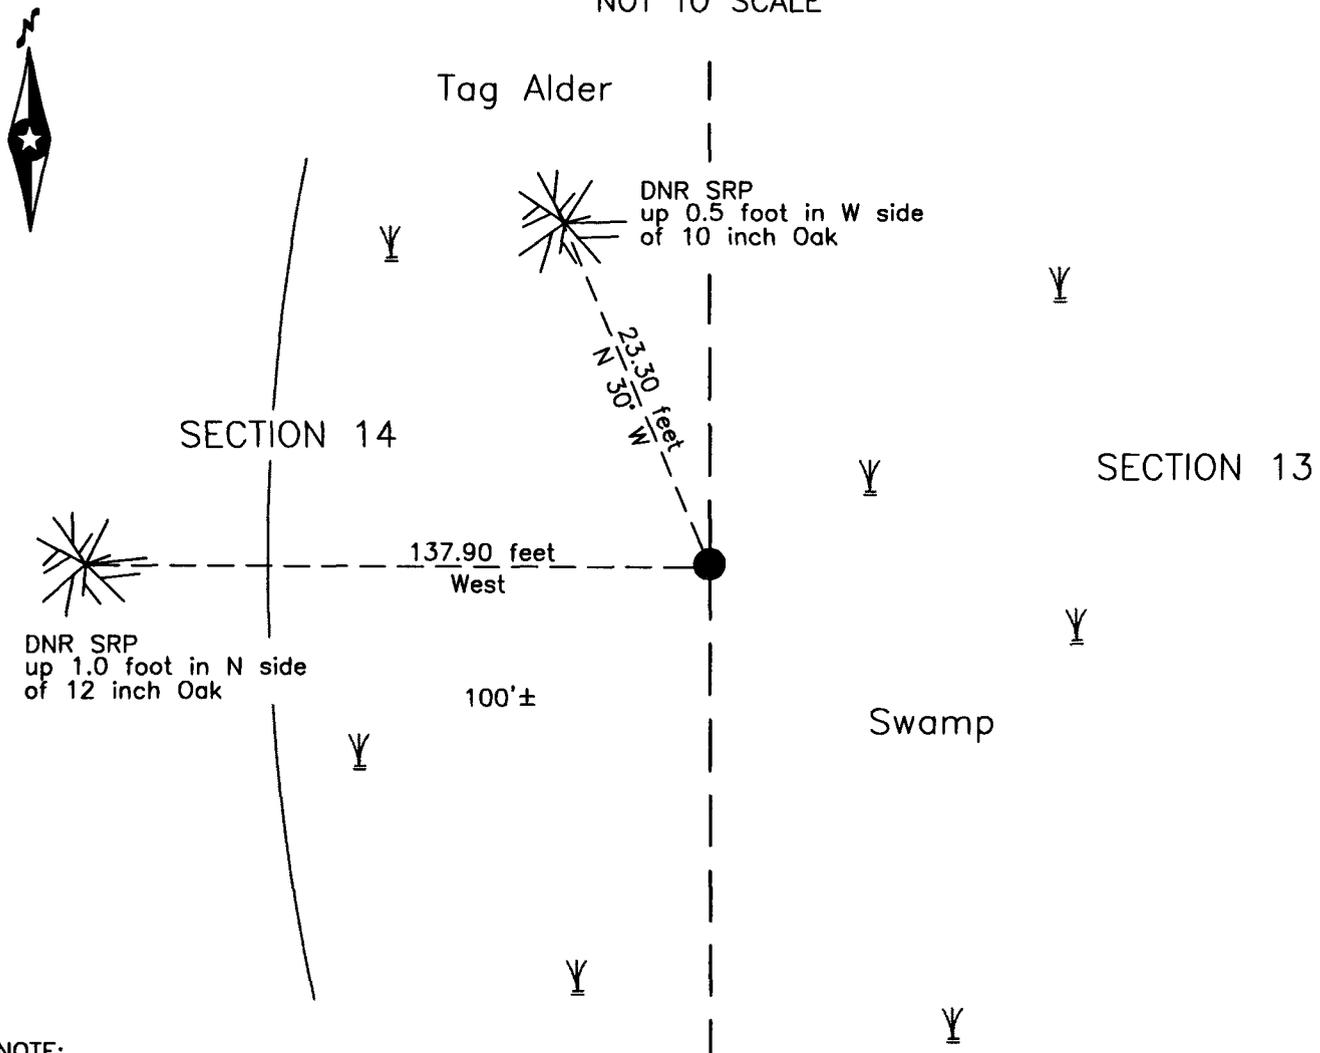

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.


Terry L. Freeman, Cass County Surveyor
Date 6/25/14 MN License No. 21367



Statement of Evidence

East Quarter corner Section 14, Township 137 North, Range 32 West, 5th Principal Meridian.

- Dec. 1870 R. Cronk, General Land Office (GLO) Deputy Surveyor, notes for the subdivision of Township 137 North, Range 32 West, set a post for the original corner and referenced it as follows:
6" Tamarack S 47 1/2° E 35 links (23.10 feet) 8" Tamarack S 20 1/2° W 52 links (34.32 feet)
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- June 1916 E.B. Horst, LS 376, Cass County Deputy Surveyor, Survey Record Number 353, Book B, page 548, and Curo Book 65, page 40, on file in the CCHD/SO, working for Ansel Township to establish corners for Judicial Ditches 3 and 4, lists the GLO witnesses and states "we look for U.S. B.T.s all burned up, we continue S."
- Aug. 1935 J.W. Curo, LS 1428, Curo Book A3, page 49, on file in the CCHD/SO, pictorial indicates the subject corner at the mid point on the east line of Section 14.
- Oct. 2002 P.J. Axness, Minnesota Department of Natural Resources (DNR), Foothills State Forest, file SFT00019, on file in the Brainerd Office, searched for evidence of the corner and found nothing.
- Aug. 2004 J.D. Walker, LS 16098, DNR, Foothills State Forest, file SFT00019, on file in the Brainerd Office, set a 3/4 inch iron rod with survey cap at the single proportion position, in a Tag Alder swamp and witnessed as follows:
12" Oak 270° 137.90 feet 10" Oak 330° 23.30 feet

The recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the DNR in 2004 is the accepted location of this corner.

County Coordinates (Cass County South)

Northing 291232.67
Easting 446210.36