

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 30, Township 138N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
Date \_\_\_\_\_

left monument as found      lowered monument      removed monument (explain)

On 12/03/2012 placed a 3/8" REROD WITH RLS CAP NO. 17774  
Date \_\_\_\_\_

### SKETCH OF REFERENCE TIES

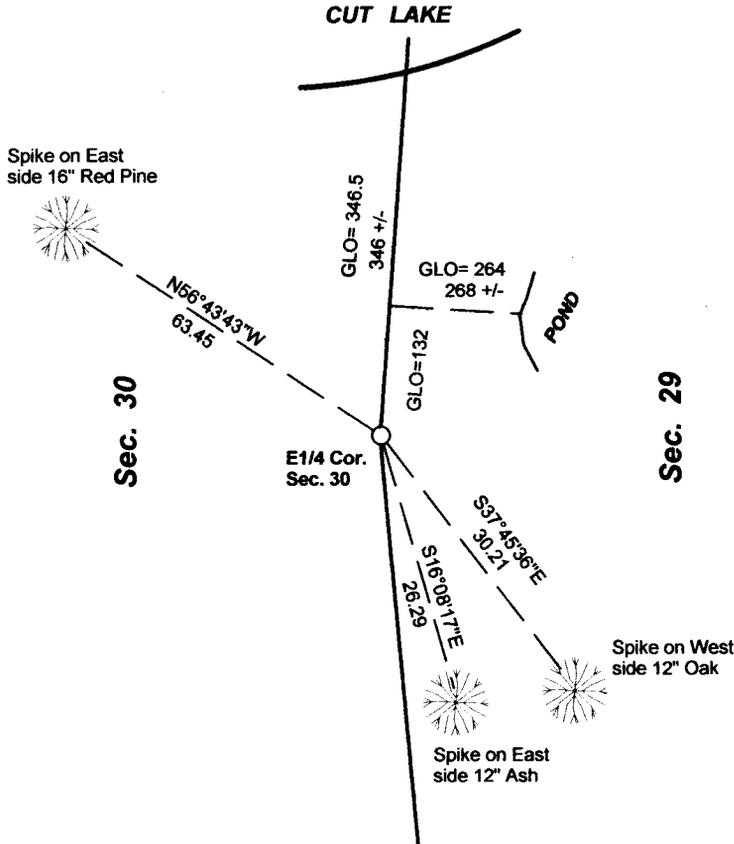

Tie Distances are measured to the spikes.

Cass County Coordinate System (South Zone)  
N= 312276.3611 E= 456299.9302

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe

Sec. 30

Sec. 29

**NOT TO SCALE**

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R Kohout 28 Dec 2012  
Marvin R. Kohout Date

Registration No, 17774

Land surveyor

*Amended 18 June 2014*

OFFICE OF COUNTY RECORDER



**A000603799**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

**7/10/2014 11:20:30 AM**

**AS DOC #: A000603799**

**PAGES: 2**

**REC FEES: 0.00**

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY SR Dep



**INDEX NO. T.0 – 5.0**

**STATEMENT OF EVIDENCE**

**EAST QUARTER CORNER SECTION 30, TOWNSHIP 138N, RANGE 31W, 5<sup>TH</sup> P.M.**

1870 T.B. WALKER GENERAL LAND OFFICE (GLO) DEPUTY SURVEYOR SET A POST AND MARKED B.T.'S. REFERENCES ARE:

6" BIRCH	10" RED OAK
S 30 W	N 25 E
12 LKS	37 LKS

2004 B. HIPPEN, TECHNICIAN, RECORDS OF THE CCSO, MADE A SEARCH AT THIS POSITION, BASED UPON SHORELINE LOCATION OF CUT LAKE AND SWAMP TO THE EAST, NO EVIDENCE OF CORNER

2012 MARVIN KOHOUT, LS NO. 17774, AND DOUG STILLE, TECHNICIAN, OF KOHOUT LAND SURVEYING SEARCHED FOR CORNER, NOTHING FOUND. A 3/8" REROD WITH RLS CAP NO. 17774, WAS SET AT DISTANCES IN HARMONY WITH HISTORICAL FEATURES CALLED FOR IN THE ORIGINAL GOVERNMENT SURVEY.