

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 29, Township 138N, Range 31W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
Date

left monument as found      lowered monument      removed monument (explain)

On 12/20/2012 placed a 3/8" REROD WITH RLS CAP NO. 17774  
Date

### SKETCH OF REFERENCE TIES

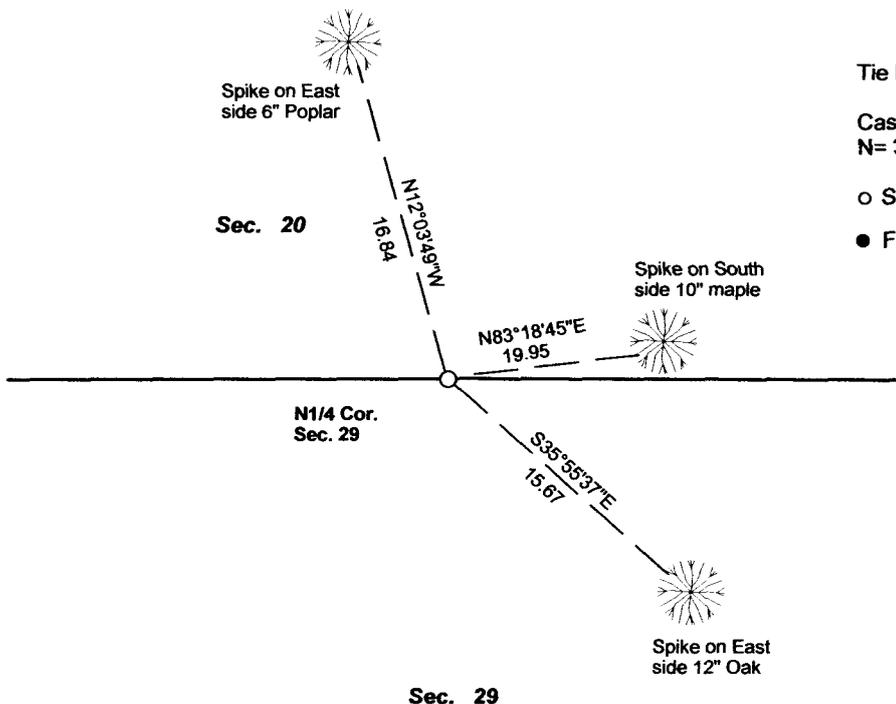

Tie Distances are measured to the spikes.

Cass County Coordinate System (South Zone)  
N= 315011.4296 E= 459114.2437

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe



**NOT TO SCALE**

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout      12 Aug 2014  
Marvin R. Kohout      Date

Registration No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



**A000604900**

**OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON**

**8/20/2014 11:22:45 AM**

**AS DOC #: A000604900**

**PAGES: 2**

**REC FEES: 0.00**

**KATHRYN M. NORBY  
CASS COUNTY RECORDER**

BY SR Dep

Page 1 of 2 A000604900



**INDEX NO. R.0 - 7.0**

STATEMENT OF EVIDENCE

**NORTH QUARTER CORNER SECTION 29, TOWNSHIP 138N, RANGE 31W, 5<sup>TH</sup> P.M.**

1870    DEPUTY SURVEYOR THOMAS B. WALKER, IN THE ORIGINAL GOVERNMENT  
         SURVEY SET A POST AND MARKED B.T.'S. REFERENCES ARE:  
         20" W. PINE                      10" ASPEN  
         SOUTH                              N70W  
         20 LKS (13.20')                      22 LKS (14.52')

DEC.  
2012    MARVIN KOHOUT, LS NO. 17774, AND DOUG STILLE, TECHNICIAN, OF KOHOUT  
         LAND SURVEYING SEARCHED FOR EVIDENCE OF THIS CORNER, NOTHING  
         FOUND. A 3/8" REROD WITH RLS CAP NO. 17774 WAS SET ON LINE AND MIDWAY  
         BETWEEN THE NE COR. OF SECTION 30, TWP 138N, RGE 31W AND THE NE  
         CORNER OF SECTION 29, TWP 138N, RGE 31W.