



A000607942

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/4/2014 1:17:37 PM

AS DOC #: A000607942

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep

Twp 143 Rge 26 Index No. E.0-03.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter corner of Section 7, Township 143 N., Range 26 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 6 Feb. 2009 placed an 1 inch by 32 inch aluminum tube with aluminum cap,
up 1.0 foot, north of Balsam grove.

Monument

SKETCH OF REFERENCE TIES
NOT TO SCALE




is marked

Aspen and Birch

SECTION 6

16d duplex nail
up 1.0 foot in S. side
of 8 inch Birch

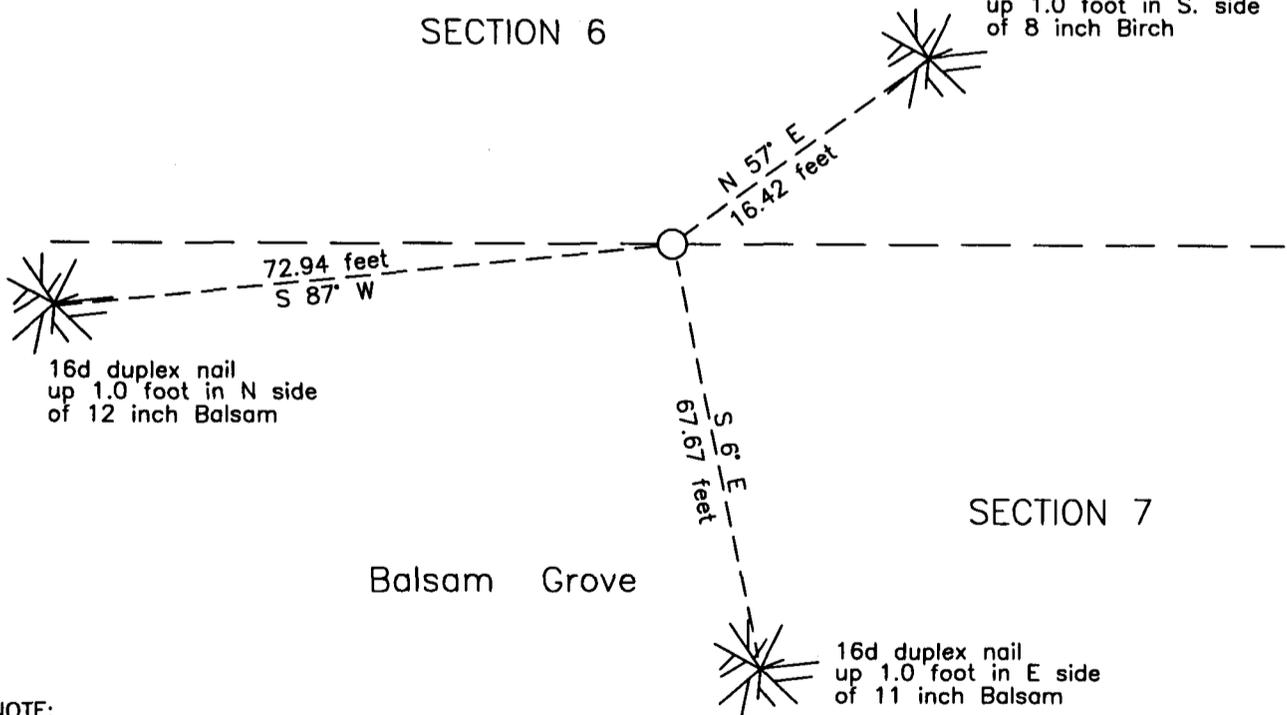

NOTE:

All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor

Date 12/3/14 MN License No. 21367





Index No. E.0-03.0

Statement of Evidence

North Quarter corner of Section 7, Township 143 North, Range 26 West, 5th Principal Meridian.

Aug. 1872 E.W. Griffin, General Land Office (GLO) Deputy Surveyor notes of the subdivision of Township 143 North, Range 26 West, set a post for the original corner and referenced it as follows:
4" Fir N 25° W 22 links (14.52 feet) 6" Fir S 29° E 18 links (11.88 feet)
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

Circa 1900 F.V. Abbot, Major, United States Army, Corps of Engineers (COE), Lake Pokegama Reservoir Map, on file with the United States Department of Agriculture, Forest Service (USFS) offices in Cass Lake, MN, and the Minnesota Historical Society by symbol indicates this to be a known corner. Notes on film of Book A1-230, page 58 state "1/4 cor. bet. secs six & seven Township 143 range 26 W. Found both bearing trees, no post. S.E. tree blown down."

1960 USFS, Field Book #2, page 13, on file in the offices in Cass Lake, MN, notes indicate original witnesses.

Feb. 2009 B. Hippen, technician, records of the CCHD/SO, made a search at COE position, determined by adjusting the Stadia Traverse to the recovered corners in Section 6, no evidence was recovered. Set a 1 inch by 32 inch aluminum tube with aluminum cap at the adjusted COE record position, up 1.0 foot, north of Balsam grove and witnessed as follows:

12" Balsam S 87° W 72.94 feet 8" Birch N 57° E 16.42 feet
11" Balsam S 6° E 67.67 feet

The recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument established by the CCHD/SO in 2009 is the accepted location for this corner.

County Coordinates (Cass County North)

Northing 254566.97

Easting 548684.41