



A000608284

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/18/2014 10:49:08 AM

AS DOC #: A000608284

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep

Twp 142 Rge 27 Index No. B.0-05.5

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

WNW Sixty Fourth corner of Section 5, Township 142 N., Range 27 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 15 July 2009 found a 1 inch outside diameter iron pipe with GLO brass cap,
lying horizontally in swamp.


left monument as found lowered monument removed monument (explain)

On 15 July 2009 placed GLO monument vertical over base, up 0.9 foot.


Monument

SKETCH OF REFERENCE TIES
NOT TO SCALE

Cedar Swamp

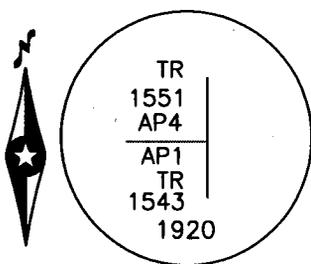

is marked

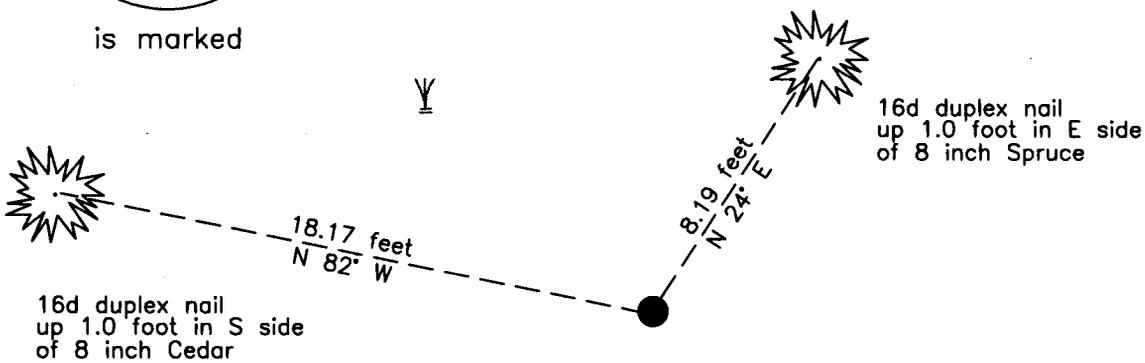

16d duplex nail
up 1.0 foot in S side
of 8 inch Cedar

16d duplex nail
up 1.0 foot in E side
of 8 inch Spruce

SECTION 5

Cedar Swamp

NOTE:

All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor

Date 12/18/14 MN License No. 21367





Index No. B.0-05.5

Statement of Evidence

West North West One Sixty fourth corner Section 5, Township 142 North, Range 27 West, 5th Principal Meridian.

1920 E.G. Harrington, U.S. Cadastral Engineer, assisted by D.B. Clement, U.S. Surveyor, GLO, Reestablishment of a portion of the Exteriors and Subdivisional Lines Township 142 North, Range 27 West, on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the CCHD/SO, states "Set an iron post, 3 ft. long, 1 ins. diam., 26 ins. in the ground, for angle point 1 of allotment 1543 and angle point 4 of allotment 1551, with brass cap". Lists no witnesses.

March 1993 R. Main, technician, United States Department of Agriculture Forest Service (USFS), T 142N R 27 W Book 3, page 6, on file in the USFS Cass Lake Office, states string chained to this location from south and west, found no evidence of corner.

July 2009 B. Hippen, technician, records of the CCHD/SO, found 1 inch outside diameter iron pipe, with GLO brass cap, lying horizontal in Cedar swamp, top to South, stand vertical over base, now up 0.9'. Old ribbon 23 feet, more or less, to East. New witnesses as follows:

8" Spruce N 24° E 8.19 feet 8" Cedar N 82° W 18.17 feet

The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by CCHD/SO in 2009 is the accepted location of this corner.

County Coordinates (Cass County North)

Northing 226258.66

Easting 520510.31