



A000608439

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/26/2014 9:17:46 AM

AS DOC #: A000608439

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 120142

Page 1 of 2
A000608439

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Stotter

Date: 12-16-14 License No: 41002

North Quarter Corner of Section 26, Township 136N, Range 31W, 5th P.M.

On _____ found a _____


left monument as found, lowered monument, removed monument (explain)

On 10-21-14 placed a 1/2" iron pipe with plastic cap stamped "RLS 41002",
flush in asphalt.

SKETCH OF REFERENCE TIES

Corner Index: R-19

Not to Scale

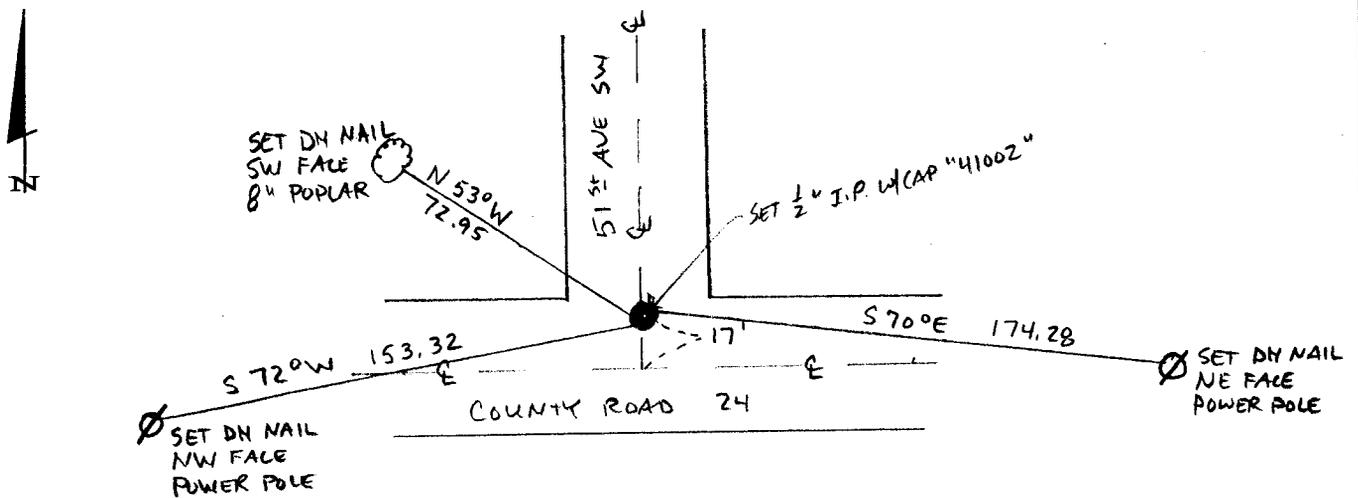



Statement of Evidence

**North quarter corner, Section 26, Township 136 North, Range
31 West, 5th Principal Meridian, Cass County, Minnesota**

1870 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

| | |
|----------------|----------|
| 7" Elm N 50° W | 34 links |
| 8" Elm S 51° E | 21 links |

1911 – A.W. Moulster in County Survey Record Book A, pages 456-464, set 1 1/4 x48" galvanized pipe at corner by proportional methods. Also found in Curo Book 50, pages 129, 130 and 135.

2014 – Patrick Trottier, PLS 41002, found no evidence of corner. Information Cass County highway department plans for CR 24 show corner position to lie on centerline of township road to north, and 17 feet north of the centerline of CR 24 . Held these parameters and set 1/2" iron pipe with plastic cap stamped "RLS 41002" and established witnesses as shown on the face of this survey.

County Coordinates (Cass County South)

Northing 251759.71
Easting 478762.05