



A000608484

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/26/2014 9:18:31 AM

AS DOC #: A000608484

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 120142

Page 1 of 2 A000608484

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A. TROTTIER

Date: 12-16-14 License No: 41002
41002

North Quarter Corner of Section 11, Township 135 North, Range 30 West, 5th P.M.

On _____ found a _____


left monument as found, lowered monument, removed monument (explain)

On 9-12-2013 placed a 1/2" x 18" iron pipe with plastic cap stamped "RLS 41002"

SKETCH OF REFERENCE TIES

Corner Index: E-19

Not to Scale

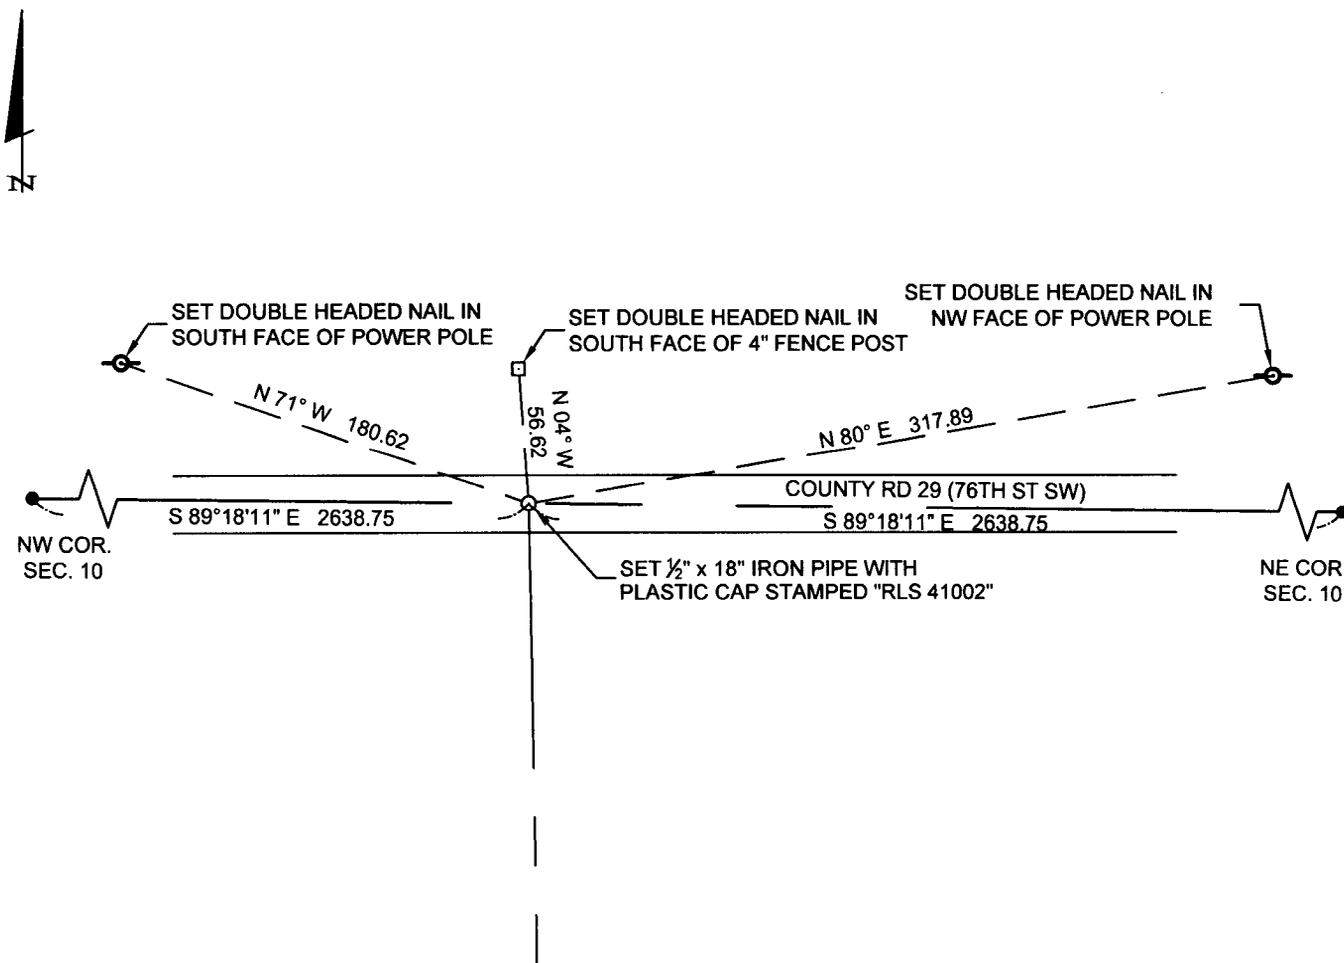

Statement of evidence for this corner position is on the back of this page



Statement of Evidence

**North quarter corner, Section 11, Township 135 North, Range
30 West, 5th Principal Meridian, Cass County, Minnesota**

1869 – Original U.S. Government Survey establishing this corner was performed. A wood post was set marking its location from which the following witnesses were established:

4" Elm	N 10 ° E	15 links
3" Aspen	S 15° W	27 links

Records on file with the Secretary of State and copies are in the Cass County Highway Department/Surveyor's Office (CCHD/SO).

1920 – John Curo set an iron monument by single proportion method between found and NW and NE corners of said section 11 as recorded in Curo Field Book 176, pages 16-18, on file in CCHD/SO.

2013 – Patrick Trottier, PLS 41002, found no evidence of corner. Position was considered lost and established by single proportion method between found and accepted NW and NE corners of said section 11. Set 1/2" x 18" iron pipe with plastic cap stamped "RLS 41002" and established the witnesses as shown on the front of this certificate.