



A000608685

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/7/2015 12:33:22 PM

AS DOC #: A000608685

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY MW Dep TX#: 120313

Twp 142 Rge 27 Index No. G.0-04.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CE Sixteenth corner of Section 7, Township 142 N., Range 27 W., 5th P.M.  
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 25 June 2009 found a 1 inch outside diameter iron pipe with GLO brass cap,  
up 0.7 foot.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_


Monument



is marked

SKETCH OF REFERENCE TIES  
NOT TO SCALE

Open Cedar Swamp

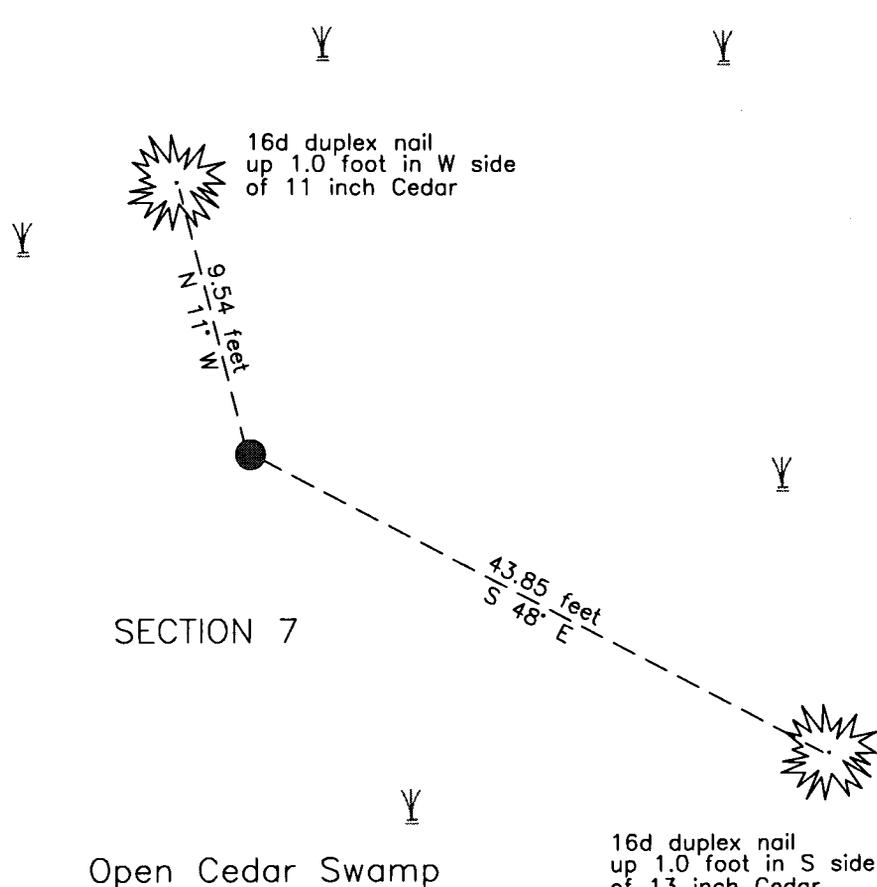

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor  
Date 11/7/15 MN License No. 21367





**Index No. G.0-04.0**

Statement of Evidence

**Center East One Sixteenth corner Section 7, Township 142 North, Range 27 West, 5th Principal Meridian.**

- 1920 E.G. Harrington, U.S. Cadastral Engineer, assisted by D.B. Clement, U.S. Surveyor, GLO, Reestablishment of a portion of the Exteriors and Subdivisional Lines Township 142 North, Range 27 West, on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the CCHD/SO, states "Set an iron post, 3 ft. long, 1 ins. diam., 26 ins. in the ground, for the C.E. 1/16 sec. cor. with brass cap". Lists the following witnesses:  
 8" Cedar            N 23°45' W            17 links(11.22 feet)            8" Spruce            S 40°45' W            23 links (15.18 feet)
- March 1993 R. Main, technician, United States Department of Agriculture Forest Service (USFS), T 142N R 27 W Book 3, page 32, on file in the USFS Cass Lake Office, states Found pipe frozen in and leaning, Found Cedar with old tag, appears to be 1920 GLO Cedar. Will return to monument.
- June 2009 B. Hippen, technician, records of the CCHD/SO, found 1 inch outside diameter iron pipe, with GLO brass cap, leaning South, plumb vertical over base, now up 0.7 foot and witness as follows:  
 11" Cedar            N 11° W            9.54 feet (old tag)            13" Cedar            S 48° E            43.85 feet

The monument, recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by CCHD/SO in 2009 is the accepted location of this corner.**

**County Coordinates (Cass County North)**

Northing 219817.21  
Easting 518349.90