

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 17, Township 136N Range 32W, 5th p.m., State of Minnesota, County of Cass


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
Date \_\_\_\_\_

left monument as found      lowered monument      removed monument (explain)

On \_\_\_\_\_ placed a 3/8" DIA. REROD WITH RLS CAP. NO. 17774  
Date \_\_\_\_\_

### SKETCH OF REFERENCE TIES

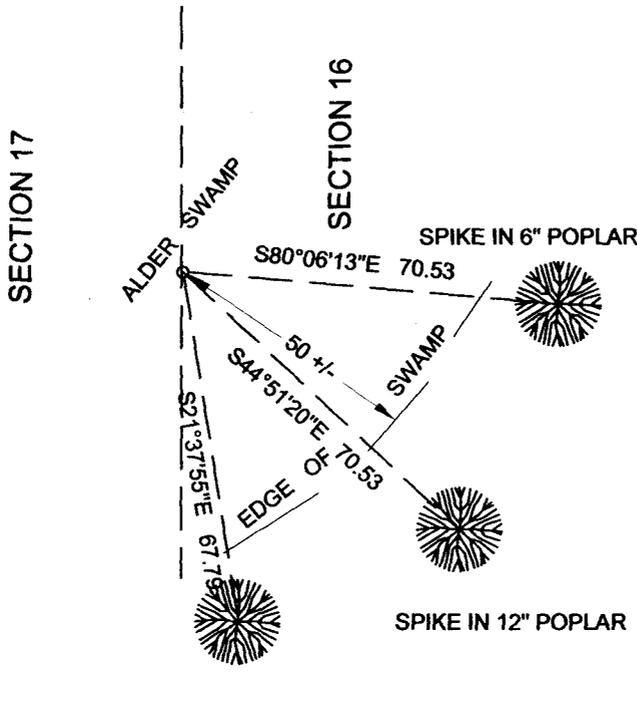

Tie Distances are measured to the spikes.

Cass County Coordinate System (South Zone)  
N= 259660.28 E= 431515.49

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R. Kohout      8 JAN 2015  
Marvin R. Kohout      Date

License No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



**A000608868**

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/15/2015 11:15:44 AM

AS DOC #: A000608868

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 120485

Page 1 of 2 A000608868



**INDEX NO. N.0-09.0**

**STATEMENT OF EVIDENCE**

**NORTHEAST CORNER OF SECTION 20, TOWNSHIP 136N, RANGE 32W, 5<sup>TH</sup> P.M.**

- 1866 OSCAR E. GARRISON, DEPUTY GOVERNMENT SURVEYOR, SET A POST TO MARK THE CORNER LOCATION. REFERENCES:  
 4" BL. PINE N 82 ½ E 12.54 FT      4" BL. PINE S 25 ½ E 17.82 FT  
 4" BL PINE S 64 ½ W 21.78 FT      5" BL. PINE N 47 W 11.22 FT  
 RECORDS ON FILE AT THE MN HISTORICAL SOCIETY, ST. PAUL AND COPIES FILED WITH THE CASS COUNTY HIGHWAY DEPT/SURVEYOR'S OFFICE (CCHD/SO)
  
- 1904 W. H. HALLETT SET POST. REFERENCES: 9" B. PINE N 4 W 48    7" B. PINE N 5 E 44  
 10" B. PINE S 6 W 47    8" B. PINE S 17 E 71  
 ROAD CALENDAR B, PAGE 6 INFORMATION ON FILE IN CCHD/SO
  
- 1926 JOHN M. GREENE, COUNTY SURVEYOR, SET A 2 ½" X 48" IRON MONUMENT TO MARK THE CORNER POSITION. PROPORTIONAL POSITIONING FROM SE CORNER SEC. 20 TO NE CORNER SEC. 8 AND SW CORNER SEC. 18 TO SE CORNER SEC. 16 COUNTY BOOK D, PAGE 171 INFORMATION ON FILE IN CCHD/SO
  
- 2004? BRUCE SKIPTON, LS 17768, ARRO LAND SURVEYORS, LLC, SET THE NE AND N1/4 CORNERS OF SECTION 21 AND PROBABLY SET THIS CORNER DURING THE SAME PROJECT. CERTIFICATES OF SURVEY NO. 852 AND NO. 2998
  
- 2014 MARVIN R. KOHOUT, LS 17774, KOHOUT LAND SURVEYING, AND ADAM HANSON, TECHNICIAN, NORTHWOODS SURVEYING, FOUND AN IRON MONUMENT WITH RLS CAP 17768, IN COUNTY ROAD NO. 23. REFERENCES AS SHOWN ON PAGE 1 OF THIS DOCUMENT.

*[Faint handwritten notes and signatures at the bottom of the page.]*