



A000608882

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/15/2015 11:15:58 AM

AS DOC #: A000608882

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 120485

Twp 139 Rge 26 Index No. A.0-02.7

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander corner of Section 6&31, Township 139&140 N., Range 26 W., 5th P.M.  
State of Minnesota, County of Cass, on the East shore of Lake George.


At the corner location shown on the sketch:

On 28 Mar 2008 found a 2 inch outside diameter iron pipe, up 1.7 feet,  
50 feet± East of Tag Alder swamp.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_


SKETCH OF REFERENCE TIES  
NOT TO SCALE

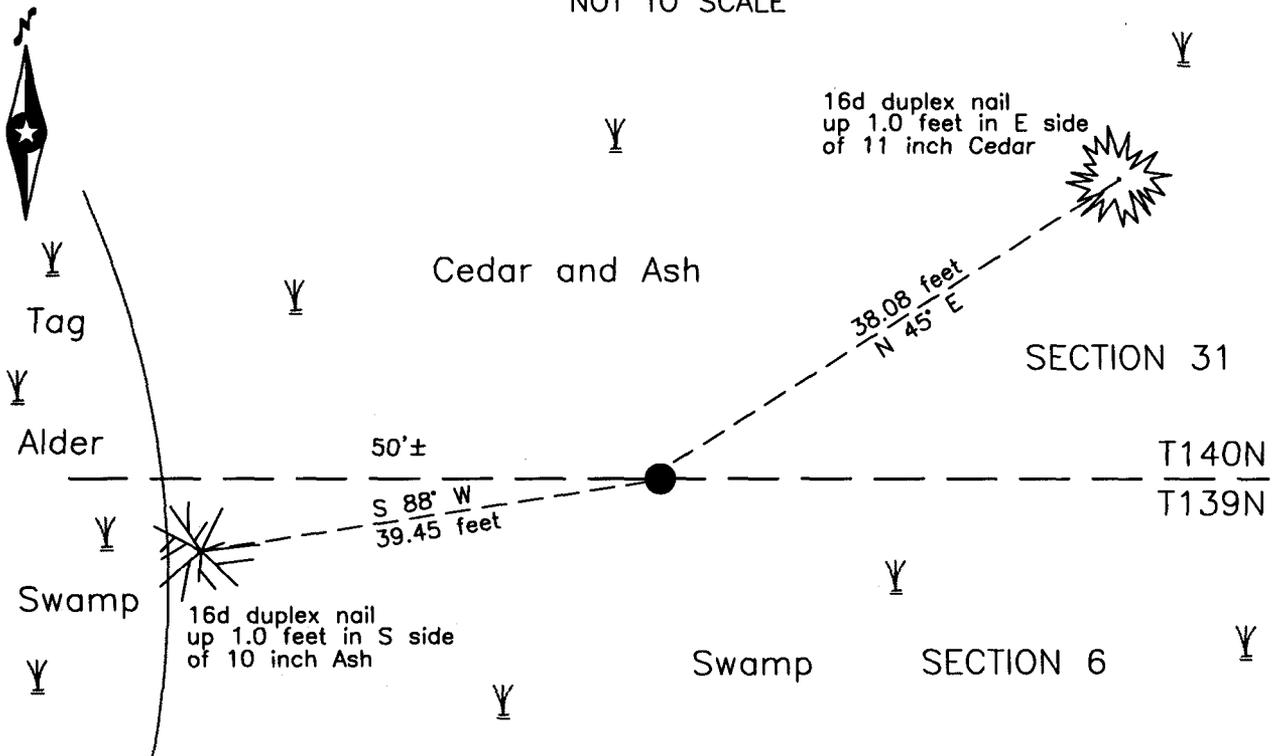

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

  
Terry L. Freeman, Cass County Surveyor  
Date 1/14/15 MN License No. 21367



**13926 A.0-02.7**Statement of Evidence**Meander corner Number 51 of Sections 6 and 31, Township 140 and 139 North, Range 26 West,  
5th Principal Meridian, east shore of Lake George.**

- Nov. 1863 Johnson and Thornton, General Land Office (GLO) Deputy Surveyors, notes for the line between Townships 139 and 140 North, set a post for the original corner and referenced it as follows:  
18" W. Pine N 82° E 33 links (21.78 feet) 10" W. Pine S 40° E 25 links (16.50 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- 1936 Civilian Conservation Corps, Washburn Lake Camp, Book Number 3, page 54, on file in the CCHD/SO, indicates I.P. for M.C. 3.75 ch. W. of ¼ cor.
- 1986 Landecker and Associates, Inc., Control Diagram, on file in the Pequot Lake Office and a copy on file in the CCHD/SO, indicates a 1.25" iron at the subject corner.
- March 2008 B. Hippen, technician, records of the CCHD/SO, found 2 inch outside diameter iron pipe, up 1.7 feet, 50 feet, more or less, west of tag alder swamp and witnessed as follows:  
10" Ash S 88° W 39.45 feet 11" Cedar N 45° E 38.08 feet

The recovered and established witnesses for this corner position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered in 2008 by the CCHD/SO, is the accepted location of this corner.**

**County Coordinates (Cass County North)**

Northing 131600.36

Easting 549313.12