



A000609055

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

1/22/2015 10:17:05 AM

AS DOC #: A000609055

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 120609

Page 1 of 2 A000609055

Twp 139 Rge 26 Index No. A.0-03.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter corner of Section 6, Township 139 N., Range 26 W., 5th P.M.  
State of Minnesota, County of Cass, on the East shore of Lake George.


At the corner location shown on the sketch:

On 28 Mar 2008 found \_\_\_\_\_ a 2 inch outside diameter iron pipe, up 1.8 feet,  
\_\_\_\_\_ in Cedar swamp, 30 feet± North of open marsh.

left monument as found     lowered monument     removed monument (explain)

On \_\_\_\_\_ placed \_\_\_\_\_


SKETCH OF REFERENCE TIES  
NOT TO SCALE

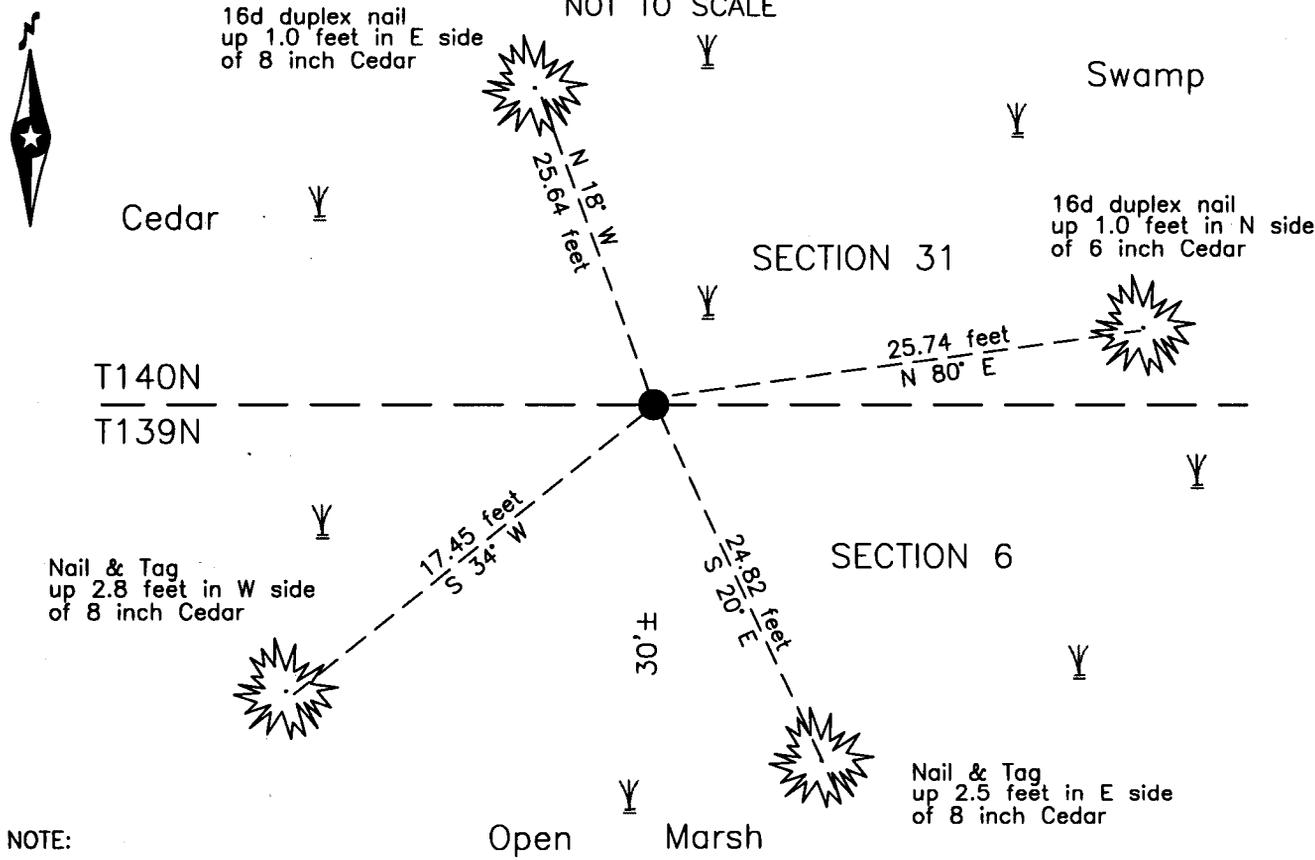

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

  
Terry L. Freeman, Cass County Surveyor  
Date 11/21/15 MN License No. 21367

**Index No. A.0-03.0**

Statement of Evidence

**North Quarter corner of Section 6, Township 139 North, Range 26 West, 5th Principal Meridian**

- Nov. Johnson and Thornton, General Land Office (GLO) Deputy Surveyors, notes for the line between Townships  
1863 139 and 140 North, set a post for the original corner and referenced it as follows:  
3" Tam S 70° W 12 links (7.92 feet) 4" Tam N 50° E 8 links (5.28 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the  
Cass County Highway Department, Surveyor's Office (CCHD/SO).
- 1936 Civilian Conservation Corps, Washburn Lake Camp, Book Number 3, page 53, on file in the CCHD/SO, indicates  
I.P. for ¼ corner.
- Dec. G. Ryan, LS 2054, CCC Camp S-97, recovered an iron pipe set by County Surveyor Green. He used this  
1940 monument to place other corners by proportionate measurement. This data is contained on a Certificate of  
Location of Government Corner filed in the Cass County Recorder's office as Document Numbered A000560849..
- Circa Landecker and Associates, Inc., Control Diagram, on file in the Pequot Lake Office and a copy on file the  
1986 CCHD/SO, indicates a 1.25" iron at the subject corner.
- March B. Hippen, technician, records of the CCHD/SO, found 2 inch outside diameter iron pipe, up 1.8 feet, 30 feet,  
2008 more or less, north of open marsh and witnessed as follows:  
8" Cedar N 18° W 25.64 feet 6" Cedar N 80° E 25.74 feet  
8" Cedar S 34° W 17.45 feet 8" Cedar S 20° E 24.82 feet

The recovered and established witnesses for this corner position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered in 2008 by the CCHD/SO, is the accepted location of this corner.**

**County Coordinates (Cass County North)**

**Northing 131603.94**  
**Easting 549550.44**