



A000609630

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

2/18/2015 10:17:31 AM

AS DOC #: A000609630

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 121093

Twp 135 Rge 30 Index No. A.0-03.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 6, Township 135 N., Range 30 W., 5th P.M.

State of Minnesota, County of Cass


At the corner location shown on the sketch:

On Nov.4, 2014 found 1/2" Iron pipe 0.3' below surface

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES NOT TO SCALE

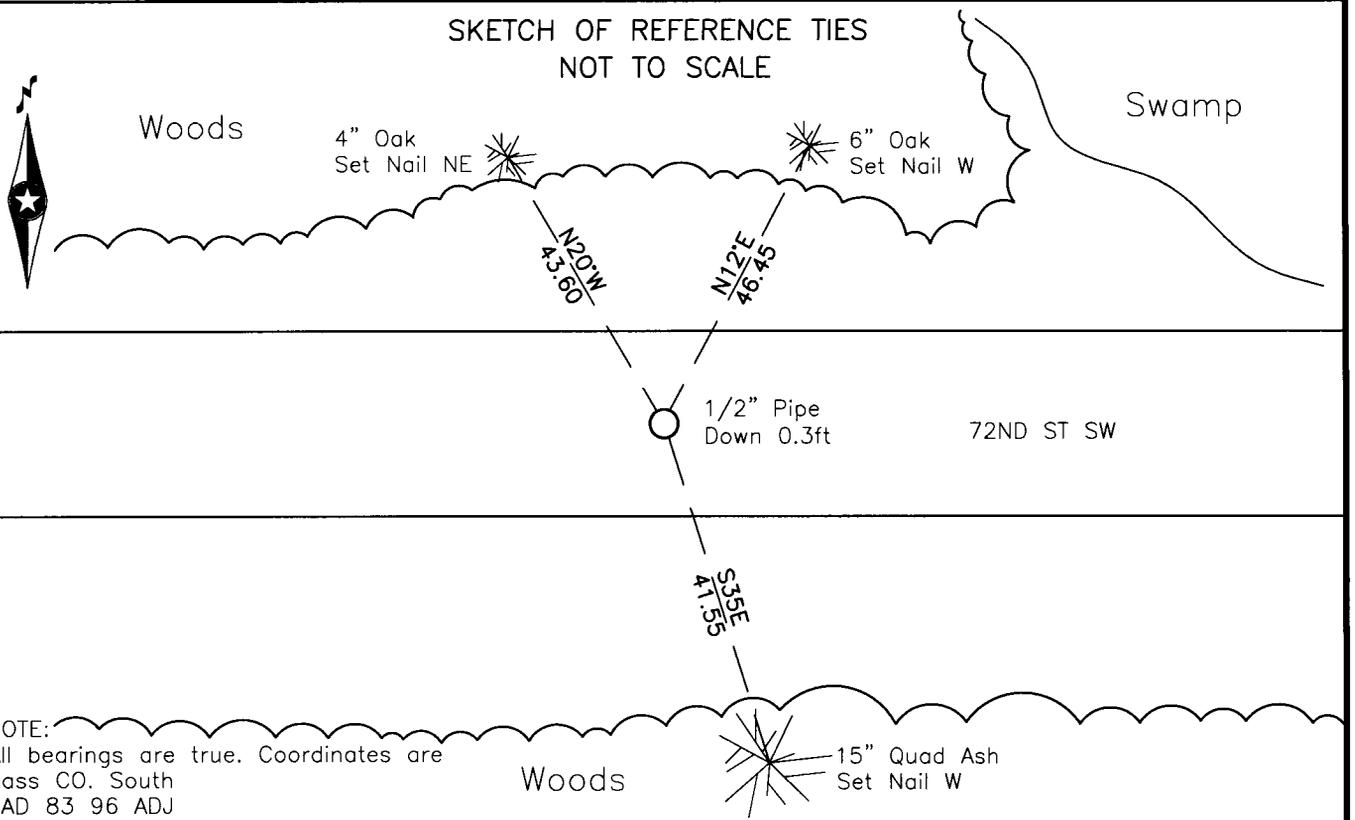

NOTE:
All bearings are true. Coordinates are
Cass CO. South
NAD 83 96 ADJ
N=241227.220 E=489573.491

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Daniel W. Skinner, Land Surveyor

Date 2-1-15 MN License No. 40827





Index No. A.0-03.0

Statement of Evidence

North Quarter Corner Section 6, Township 135 North, Range 30 West

1858 Original US General Land Office Survey by E.N. Darling, set a wood post and bearing trees as noted:

6" Pine	S 83° E	31 links
10" Tamarack	N 60° W	93 links

Information on file with the Minnesota Historical Society in St. Paul, MN and copies are filed with the CCHD/SO.

1915 Curo book 094, page 132, F.A. Donner set 3 foot iron pin at corner.

Information on file with CCHD/SO.

2014 Karvakko Enginnering, found a ½ in. open iron pipe .3 ft below road surface and accepted it as the corner.

Reference Ties:

4" Oak	N 20° W	43.60 ft.
6" Oak	N 12° E	46.45 ft.
15" Ash	S 35° E	41.55 ft.