

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NE Corner of Section 2, Township 140N, Range 26W, 5th p.m., State of Minnesota, County of Cass

At the corner location shown on the sketch:

On _____ found a _____
Date

left monument as found lowered monument removed monument (explain)
On 19 JAN. 2015 placed a 3/8" DIAMETER REROD WITH RLS CAP NO.17774
Date

SKETCH OF REFERENCE TIES

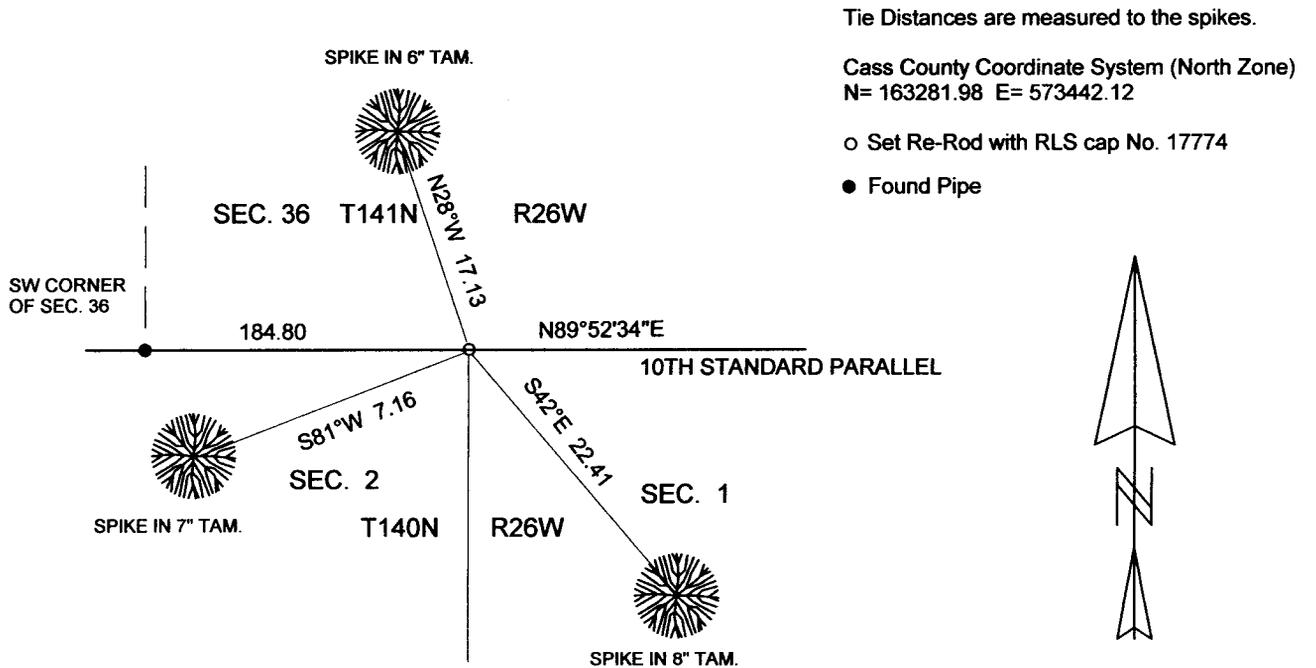

Tie Distances are measured to the spikes.

Cass County Coordinate System (North Zone)
N= 163281.98 E= 573442.12

○ Set Re-Rod with RLS cap No. 17774

● Found Pipe

NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marvin R Kohout 11 FEB 2015
Marvin R. Kohout Date

License No. 17774

Land surveyor

OFFICE OF COUNTY RECORDER



A000609686

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

2/19/2015 10:51:05 AM

AS DOC #: A000609686

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY SR Dep TX#: 121129

**INDEX NO. A-0-21.0****STATEMENT OF EVIDENCE****NORTHEAST CORNER OF SECTION 2, TOWNSHIP 140N, RANGE 26W, 5TH P.M.**

- 1871 WILLIAM P. ALLEN AND EDGAR P. PUTNAM, DEPUTY GOVERNMENT SURVEYORS, SET A POST TO MARK THE CORNER LOCATION WHICH WAS 184.8 FEET EAST OF THE SE CORNER OF SEC. 35, T141N, R26W. REFERENCES:
4" TAM S18W 60.72 FT
4" TAM N37E 38.94 FT
RECORDS ON FILE AT THE MN HISTORICAL SOCIETY, ST. PAUL, AND COPIES FILED WITH CASS COUNTY HIGHWAY DEPT/SURVEYOR'S OFFICE (CCHD/SO)
- 1912 HARRY TODD AND ASSISTANTS MARK SNELL AND LLOYD BOXWELL FOUND AN OLD STAKE AND BOTH BEARING TREES CURO BOOK 93, PG 40 CCHD/SO
- 1921 J. H. FLYNN, RAN STATIONING ALONG A RANDOM LINE BETWEEN THE N1/4 CORNER OF SECTION 36, T141N, R26W TO THE E1/4 OF SEC. 2, T140N, R26W. HE MENTIONS THE NW CORNER OF SEC. 1 IS ABOUT 189 FEET EAST OF THE SE CORNER OF SEC. 35, T141N,R26W. CURO BOOK 152,PAGES 162-163 CCHD/SO
- 1937 CCC AT 5017' NORTH FROM SOUTH SET APP. CORNER POST WHICH WAS 20' WEST OF ORIGINAL CORNER, AT 5100' NORTH CORRECTION CORNER FOR NE CORNER SECTION 2, OLD ORIGINAL SE CORNER OF SEC.35 T141N R26WIS S76W 185' START WEST FROM 4" SQUARED STAKE. WASBURN LAKE FORESTRY HEADQUARTERS BK 5 PG 4 AND BK 6 PG 7
- 1938 CCC AT 5115' FROM SOUTH INTERSECT STANDARD PARALLEL 19' EAST OF 2" SQ. TAM STAKE WITH SCRIBING REFERENCE: 4" TAM STUB S14W 63.6 WASBURN LAKE FORESTRY HQ BK 20 PG 2
- 2014 MARVIN KOHOUT, LS NO. 17774, KOHOUT LAND SURVEYING, SEARCHED FOR EVIDENCE OF THIS CORNER. FINDING NONE A 3/8' DIAMETER REROD WAS PLACED ON LINE BETWEEN THE SE CORNER OF SECTION 35, T141N, R26W AND THE S1/4 CORNER OF SEC 36 A DISTANCE OF 184.8 FEET EAST OF THE SE CORNER OF SEC. 35. REFERENCES AS SHOWN ON PAGE 1.