



A000609819

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

2/26/2015 10:39:35 AM

AS DOC #: A000609819

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 121230

Page 1 of 2 A000609819

Twp 144 Rge 31 Index No. P.0-17.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 22, Township 144 N., Range 31 W., 5th P.M.


State of Minnesota, County of Cass

At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 1 June 2007 placed _____ a 1 inch diameter by 30 inch aluminum tube with
aluminum cap, down 0.5 foot, 8'± East of centerline County Road #143.

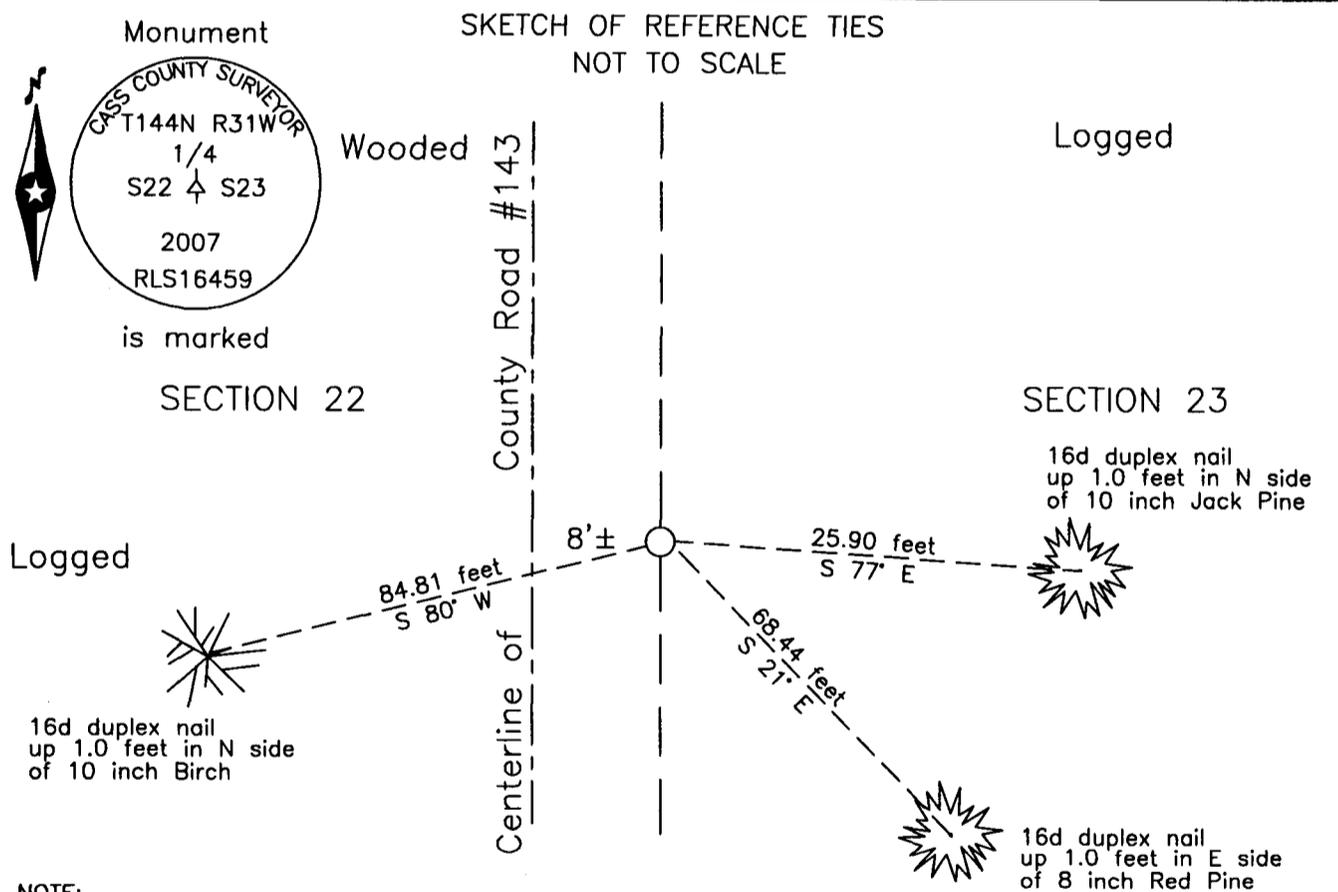

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 2/25/15 MN License No. 21367

**Index No. P.0-17.0**Statement of Evidence**East Quarter corner of Section 22, Township 144 North, Range 31 West, 5th Principal Meridian.**

- Aug. 1875 B.C. Baldwin, General Land Office (GLO) Deputy Surveyor, in the notes of the subdivision of Township 144 North, Range 31 West, set a post for the original corner and referenced it as follows:
7" W. Pine N 77° W 90 links (59.40 feet) 16" N. Pine S 84° E 90 links (59.40 feet)
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- Aug. 1922 E.B. Horst, LS 376, Deputy County Surveyor, Survey Record No. 508, Book D, page 64, and Curo Book 186, page 41, on file in the CCHD/SO, states "We find the N. Pine which is now a 4 ft stump bearing all the scribe marks."
- Aug. 1930 H.D. Craig, U.S. Surveyor, in the notes of the Dependent Resurvey of a portion of Township 144 North, Range 31 West, set corner "as determined from the remains of an original bearing tree. Set an iron post, 3 ft. long, 1 in. diam., 40 ins. in the ground, with brass cap", and referenced it as follows:
10" J. Pine N 58° E 162 links (106.92 feet) 8" J. Pine S 80 1/2° W 229 links (151.14 feet)
Said records are on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the CCHD/SO.
- Nov. 2004 T.L. Freeman, LS 21367, Certificate of Survey, on file in the Landecker and Associates, Inc. (Northern Engineering & Consulting, Inc) Walker Office, indicates a position for the subject corner.
- June 2007 B. Hippen, technician, records of the CCHD/SO, set a 1 inch diameter aluminum tube, 30 inches long, with aluminum cap, down 0.5 foot, 8 feet, more or less, East of centerline of County Road Number 143 from recovered monuments of the 2004 Freeman survey and witnessed as follows:
10" J. Pine S 77° E 25.90 feet 8" N. Pine S 21° E 68.44 feet
10" Birch S 80° W 84.81 feet
- Jan. 2015 B. Hippen, technician, records of the CCHD/SO, found the 2007 monument and witnesses all good. The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by the CCHD/SO is the correct perpetuation of this corner.

County Coordinates (Cass County North)

Northing 271089.66

Easting 410382.44