



A000610097

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/12/2015 12:56:32 PM

AS DOC #: A000610097

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 121466

Twp 139 Rge 25 Index No. V.0-23.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter of Section 36, Township 139 N., Range 25 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 14 Apr 2004 found _____ remains of a 30 inch Red Oak

left monument as found lowered monument removed monument (explain)

On 1 July 2004 placed _____ a 7/8 inch OD iron pipe, stamped 16459, up 0.4 foot


SKETCH OF REFERENCE TIES NOT TO SCALE

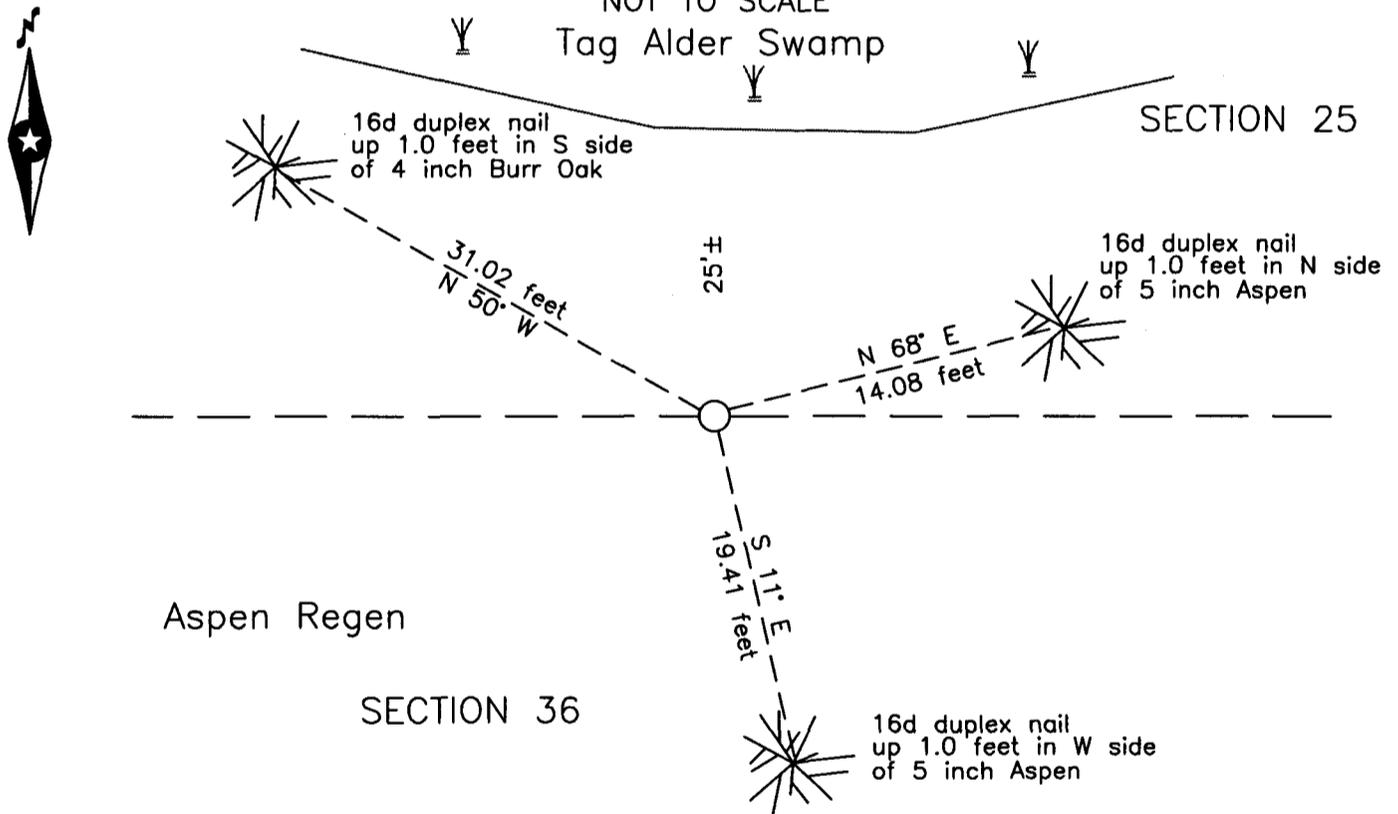

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

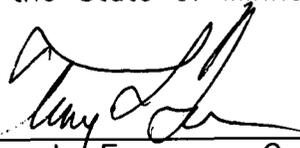
Terry L. Freeman, Cass County Surveyor
Date 3/11/15 MN License No. 21367



Statement of Evidence

North Quarter corner Section 36, Township 139 North, Range 25 West, 5th Principal Meridian.

Nov. 1863 Johnson and Thornton, GLO Deputy Surveyors, in the notes of the subdivision of Township 139 North, Range 25 West, set a post for the original corner and referenced it as follows:
3" Spruce N 5° E 7 links (4.62 feet) 12" Aspen S 25° E 25 links (16.50 feet)
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

1937 CCC personnel, Washburn Lake notes, Book 1, page 59, on file in the Department of Natural Resources Office (DNR), notes Set app cor 3" Birch post 2640' from E.

1937 CCC personnel, Washburn Lake notes, Book 8, on file in the DNR Office, states Fnd old post point & stump of SE B.T. and root of NE B.T. Set 1 1/2 x 54" I.P. 2 1/2' in ground w/ 2 1/4" steel cap witnesses are listed as follows:
10.7" Balsam S 6 1/2° W 34.9 feet 13 1/2" Balsam stub S 29 1/2° E 16.5 feet
7 1/2" Balsam N 54° W 19.6 feet

July 2004 B. Hippen, technician, records of the CCHD/SO, set a 7/8 inch outside diameter iron pipe, stamped 16459, up 0.4 foot, midway and on line between the Northeast and Northwest corners of Section 36 and mark the following witnesses:
4" B. Oak N 50° W 31.02 feet 5" Aspen S 11° E 19.41 feet
5" Aspen N 68° E 14.08 feet

The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the CCHD/SO in 2004 is the accepted location of this corner.

County Coordinates (Cass County North)
Northing 105354.97
Easting 607745.68