



A000610246

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

3/19/2015 11:01:43 AM

AS DOC #: A000610246

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 121588

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Index No. E.0-19.0

NORTH QUARTER of Section 11, Township 138 N., Range 32 W., 5th P.M.

State of Minnesota, County of Cass.


At the corner location shown on the sketch:

On \_\_\_\_\_ found \_\_\_\_\_

left monument as found  lowered monument  removed monument (explain)

On 21 Apr 2014 placed 1/2 x 12 inch Rebar, capped  
RLS 16459, on centerline, proportionately east-west.

SKETCH OF REFERENCE TIES  
NOT TO SCALE

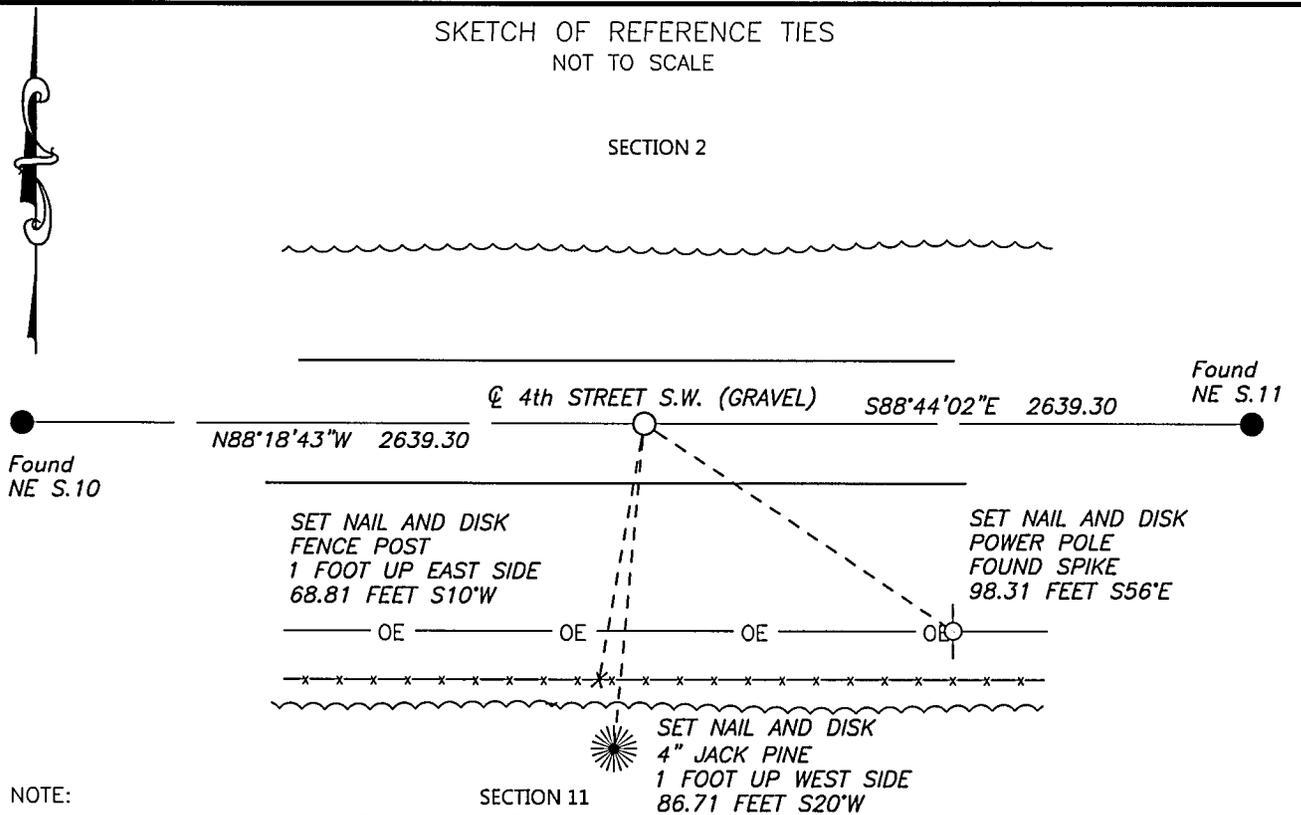

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen

Date 3/13/15 MN License No. 16459



**Index No. E.0-19.0**

Statement of Evidence

**North Quarter corner of Section 11, Township 138 North, Range 32 West, 5th Principal Meridian.**

Dec. 1870 M.Black, General Land Office (GLO) Deputy Surveyor, in the subdivision of this township set a post for the original corner and referenced it as follows:  
3" Aspen N 45°W 13 links (8.58 feet) 4" Aspen S 12 1/2°E 10 links (6.60 feet)  
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with Cass County Highway Department/Surveyor's Office.

June 1912 J.W.Curo, LS 1428, and M.A.Kemp, working for McKinley Township, Cass County Surveyors Record No. 180, Book A, page 410 states "at the ¼ corner between sec's 2 and 11 Gov't notes call for....all are gone". Also in Curo Field Book 98, page 97, on file in Cass County Highway Department/Surveyor's Office, the notes of the above record state "...@ 2400 stake, we did not look for ¼ cor as all marks have been burned out".

Nov. 2013 Northwestern Surveying and Engineering, Inc. (NWSE) survey crew of Bomstad and Mystic searched the corner vicinity. No survey evidence was recovered other than the road centerline.

Feb. 2014 NWSE survey crew of Bomstad and Walker-O'Beirne made an additional search in the corner vicinity. No evidence was recovered.

March 2014 NWSE, Robert Kovanen, LS 16459, reviewed the recovered record data, field evidence and survey measurements. The measured overall distance of the north line of Section 11 agrees well with the 1912 distance. A position computed proportionately east-west and held in latitude by the existing road centerline was accepted as the best evidence of the corner

April 2014 NWSE survey crew of Bomstad and Walker-O'Beirne placed a ½ by 12 inch capped rebar on centerline of gravel 4<sup>th</sup> Street SW (Co. Rd. 112), at the position described above. The monument, together with the recovered and established references for the position are shown on the face of this document.

**Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument established by NWSE in 2014 is the accepted location of this corner.**