



A000610256

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/19/2015 11:04:42 AM

AS DOC #: A000610256

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY MW Dep TX#: 121589

Twp 138 Rge 32 Index No. C.0-01.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

West Quarter corner of Section 6, Township 138 N., Range 32 W., 5th P.M.

State of Minnesota, County of Cass.

At the corner location shown on the sketch:


On _____ found _____

left monument as found lowered monument removed monument (explain)

On 22 Aug 2014 placed 1/2 x 12 inch rebar, capped LS 16459,
1 foot east of centerline, at a lost position as shown below.

SKETCH OF REFERENCE TIES

NOT TO SCALE

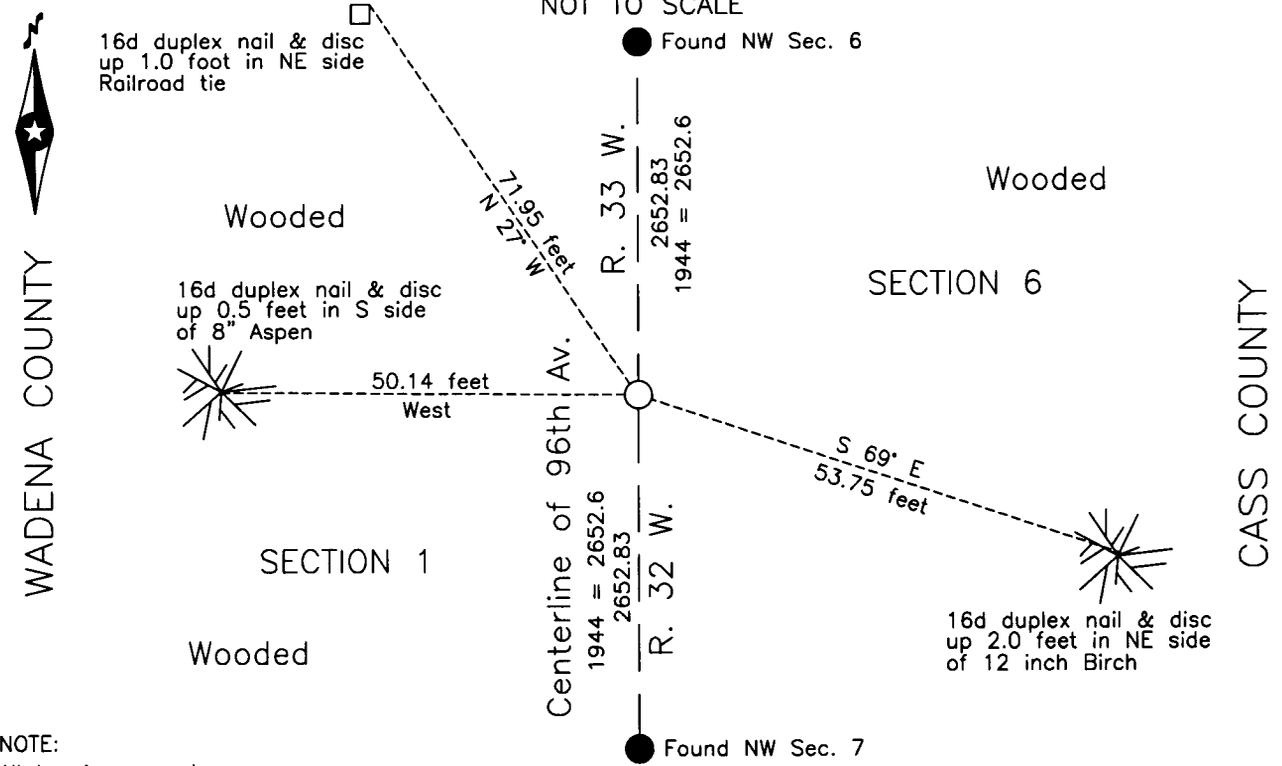

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen

Date 3/19/15 MN License No. 16459





Index No. C.0-01.0

Statement of Evidence

West Quarter corner of Section 6, Township 138 North, Range 32 West, 5th Principal Meridian.

- Oct. 1860 J. Myers, General Land Office (GLO) Deputy Surveyor in the survey of the range line set a post for the original corner and referenced it as follows:
4" Blk Pine N 87° W 32 links (21.12 feet) 5" Blk Pine N 18° E 149 links (98.34 feet)
The original plat and above record are archived at the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with Cass County Highway Department/Surveyor's Office and Wadena County.

- 1916 Minnesota Plat Books – 1916, on file at the John R. Borchert Map Library of the University of Minnesota (U of MN Map Library), indicates different ownership northeast, southeast and west of the subject corner.

- Aug. 1939 Air photo BXQ-1-87, available at the Minnesota Department of Natural Resources and the U of MN Map Library was georeferenced and positioned under the Northwestern Surveying and Engineering, Inc. (NWSE) working drawing. A north-south road is evident in the vicinity of the subject corner and a field line running westerly approximately 335 feet about 80 feet northerly of a single proportion lost position for the subject corner. GLO feature calls were compared to measurements on the photo.

- Aug. 2014 Northwestern Surveying and Engineering, Inc. crew of Walker-O'Beirne and McLellan searched the corner vicinity with no recovery. Upon confirmation with Robert Kovanen, LS 16459, a ½ by 18 inch rebar, capped LS 16459, was placed at a single proportion position between the recovered Northwest and Southwest corners of Section 6. The monument, together with the recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set/found in 2014 by NWSE is the accepted location of this corner.