



A000610269

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/19/2015 11:04:55 AM

AS DOC #: A000610269

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY MW Dep TX#: 121589

Page 1 of 2
A000610269

TwP 139 Rge 26 Index No. G.0-25.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 12, Township 139 N., Range 26 W., 5th P.M.
State of Minnesota, County of Cass.


At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 10 Apr 2014 placed a 1/2" x 18" rebar, RLS No. 16459.

SKETCH OF REFERENCE TIES
NOT TO SCALE

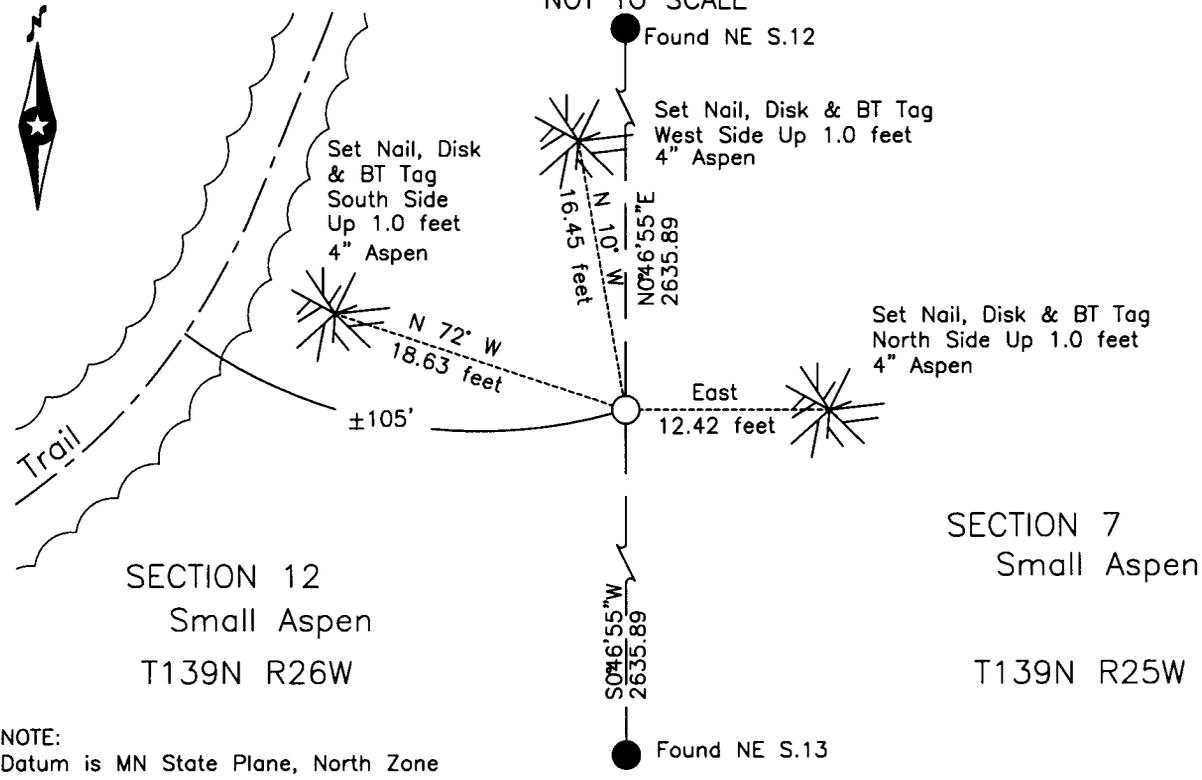

NOTE:
Datum is MN State Plane, North Zone

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.
I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen
Date 3/13/15 MN License No. 16459



Index No. G.0-25.0

Statement of Evidence

East Quarter corner of Section 12, Township 139 North, Range 26 West, 5th Principal Meridian.

Nov.15 G. Johnson and A. Thornton, General Land Office (GLO) Deputy Surveyors, in the survey of this Range
1863 line, set a post for the original corner referenced with bearing tree as follows:
30" W. Pine S 40° E 49 links (32.34 feet) 26" W. Pine S 71° W 35 links (23.10 feet)
The original plats and above record are archived with the Minnesota Historical Society, St. Paul, Minnesota,
copies are filed with Cass County Highway Department/Surveyor's Office.

June B.F.Clark, LS 231, Deputy County Surveyor, County Road survey, Surveyor's Record No. 483, Book C,
30, page 540, on file with Cass County Highway Department/Surveyor's Office, states "Search for the ¼ cor.
1920 Bet/ 7-12 but found nothing. Thence run S. on line...". The field notes of this record are in Curo Field Book
162, on file with Cass County, page 36.

Nov. Northwestern Surveying and Engineering, Inc. (NWSE), crew of Bomstad and Walker-O'Beirne searched
2013 for the subject corner with no recovery.

March NWSE, Robert Kovanen, LS 16459, reviewed existing information and computed a single proportion lost
2013 position between the recovered Northeast and Southeast corners of Section 12.

April NWSE, crew of Bomstad and Walker-O'Beirne made an additional search for the subject corner with no
2014 recovery. A ½ by 18 inch rebar, capped LS 16459, was placed at the lost position described above. The
monument, together with the recovered and established references for the position are shown on the face
of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument
established by NWSE in 2014 is the accepted location of this corner.