



A000610270

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/19/2015 11:04:56 AM

AS DOC #: A000610270

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY MW Dep TX#: 121589

Page 1 of 2
A000610270

Twp 139 Rge 26 Index No. J.0-23.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter corner of Section 13, Township 139 N., Range 26 W., 5th P.M.
State of Minnesota, County of Cass.


At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 10 April 2014 placed a 1/2 by 18 inch rebar at a single proportion position.

SKETCH OF REFERENCE TIES NOT TO SCALE

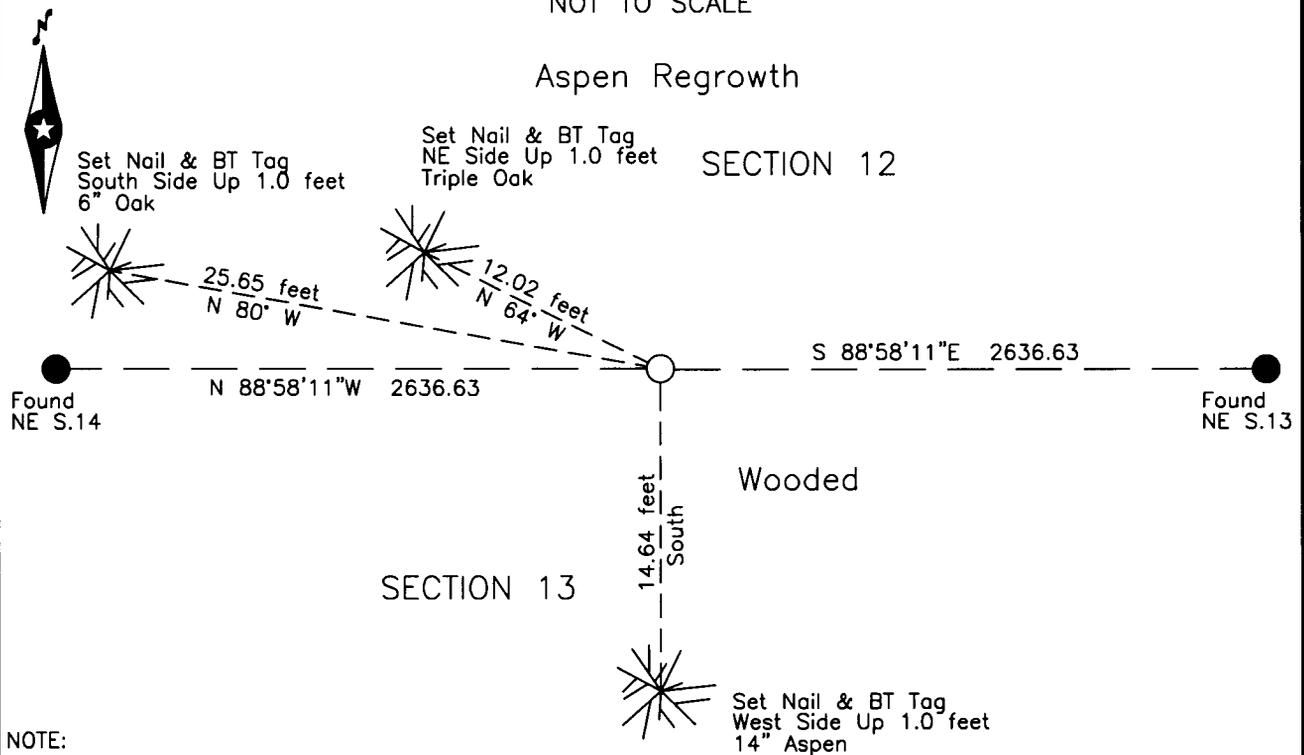

NOTE:
Datum is Minnesota State Plane, North Zone

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.
I further certify that this United States public land survey monument record is correct and complete to the best of my knowledge and belief.

Robert L. Kovanen
Date 3/13/15 MN License No. 16459



Index No. J.0-23.0

Statement of Evidence

North Quarter corner of Section 13, Township 139 North, Range 26 West, 5th Principal Meridian.

Nov.28 G. Johnson and A. Thornton, General Land Office (GLO) Deputy Surveyors, in the subdivision of this
1863 township, set a post for the original corner midway on between Section corners at 39.85 chains. The post
was referenced with on bearing tree as follows:
6" Aspen N 15° W 30 links (19.80 feet) 9" Aspen S 30° E 32 links (21.12 feet)
The original plat and above record are archived with the Minnesota Historical Society, St. Paul, Minnesota,
copies are filed with Cass County Highway Department/Surveyor's Office.

Nov. Northwestern Surveying and Engineering, Inc. (NWSE), crew of Bomstad and Walker-O'Beirne searched
2013 for the subject corner with no recovery.

March NWSE, Robert Kovanen, LS 16459, reviewed existing information and computed a single proportion lost
2014 position between the recovered and certified Northeast and Northwest corners of Section 13.

April NWSE, crew of Bomstad and Walker-O'Beirne searched for the subject corner with no recovery. A ½ by 18
2014 inch rebar, capped LS 16459 was placed at the lost position described above. The monument, together with
the recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument
established by NWSE in 2014 is the accepted location of this corner.