



A000611337

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/30/2015 10:58:04 AM

AS DOC #: A000611337

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER


BY KF Dep TX#: 122453

Page 1 of 2  
A000611337

Index No. C-25

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

  
Corey J. Hendershott

Date: 04/20/2015 License No: 45353

Quarter Corner common to Sections 1 and 6, Township 136 North,  
Ranges 30 and 31 West of the 5th Principal Meridian.  
County of Cass, STATE OF MINNESOTA.

On December 14, 2014 I searched for Gov't and 1908 evidence, but found none, so set a 3/4"x28" Iron Pipe w/plastic cap 45353 at an 1908 Obliterated position.

left monument as found;  lowered monument;  removed monuments (explain)


On Date.

decl: 1° EAST

### SKETCH OF REFERENCE TIES

3/4" Iron Pipe

not to scale

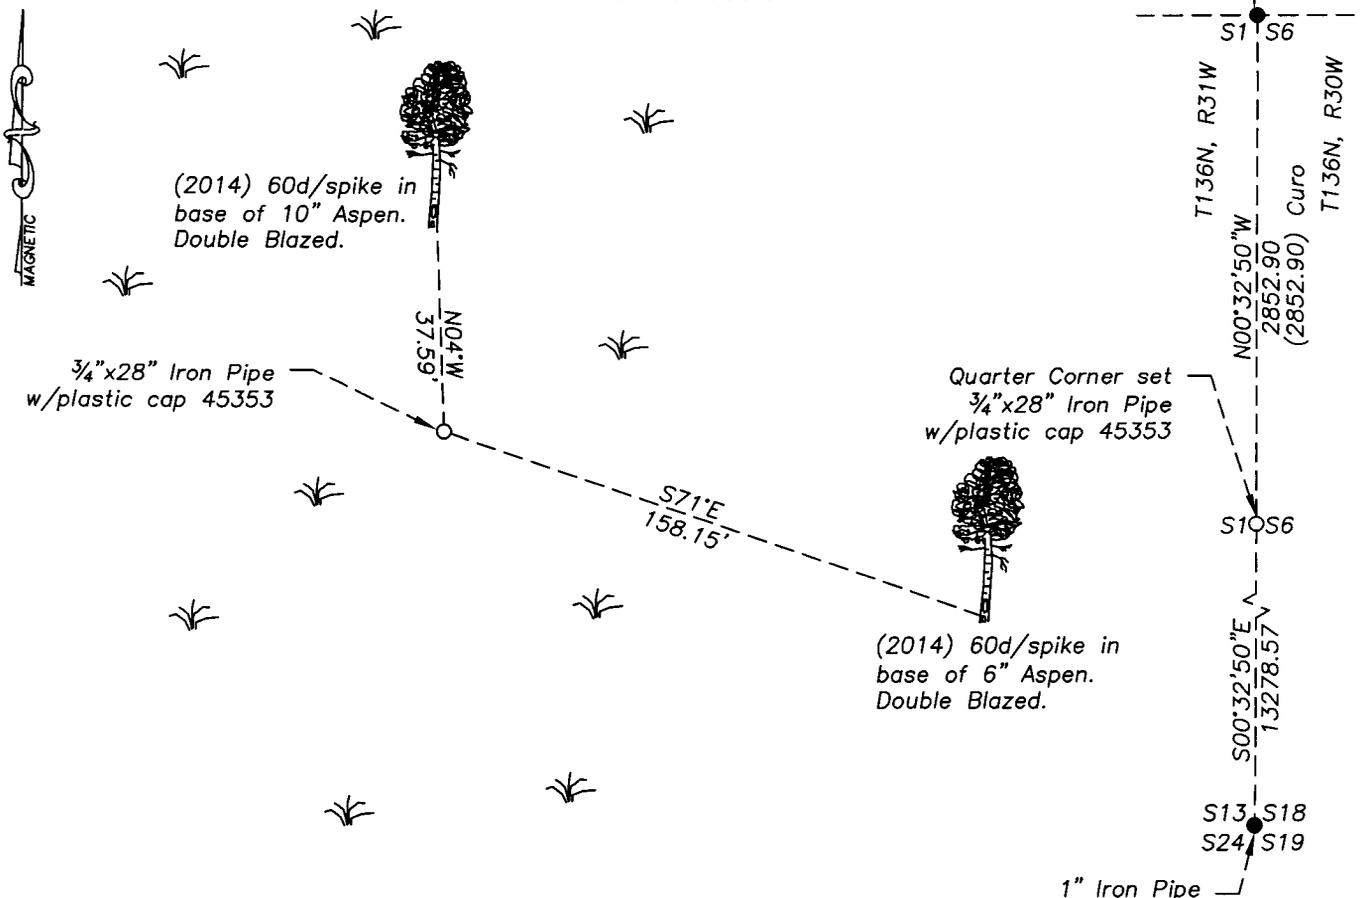

Statement of evidence for this corner position is on the back of this page



**STATEMENT OF EVIDENCE:** Quarter Corner common to Sections 1 and 6, Township 136 North, Ranges 30-31 West, of the 5th Principal Meridian.

1858; This corner was originally established by E.W. Darling, Deputy Surveyor under contract to the General Land Office (GLO), now the Bureau of Land Management (BLM). A copy of the plat of this township and hand copied field notes are on file in the Cass County Surveyor's Office. These Field notes indicate a wood post was set to mark this corner position, which was witnessed by:

Tamarack,	8",	S57E,	9 lks.,	5.94 feet;
Tamarack,	5",	N57W,	5 lks.,	3.30 feet:

1908; (Dec.) Cass County Survey Record Book "B", Pages 140 – 157, these note states that John W. Curo, Licensed Surveyor headed southerly after establishing the Closing Corner of Sections 1 and 6 by "Lost" methods by using the recovered positions of the NW corner of Section 1, T136N, R31W, and the NE Corner of Section 6, T136N, R30W. From said Closing corner he headed Southerly between Sections 1 and 6, Var. 8°30' East at 1320 set pin, 1551 feet set temp for N1/16, at 2871 feet set hub for temp Corner of Sections 1 and 6. From which the true corner set N49°38'E 27.80 feet he finds old Gov't BT's down, but was able set an "Ash Post" from the remains. In these note he falls short of the Government distance approximately 18' in the northerly. John W. Curo had a distance of "2852.9" feet between the Closing corner of Section 1 and 6, and the Quarter Corner common to Sections 1 and 6. No new witness were established, just a new ash post set.

Gov't,	Tamarack,	8",	S57E,	9 lks.,	5.94 feet;
Gov't,	Tamarack,	5",	N57W,	5 lks.,	3.30 feet:

1908; (Dec.) Curo's Field Book 85, page 260. These note states the same information as what is stated in the County Survey Record "B", pages 140-157, notes.

2014; (Nov) I Corey J. Hendershott, L.S. 45353, Eagle Eye Data Services search for 1.5 hours for the remains of the Gov't Tamaracks and John W. Curo's 1908 Ash post with no luck. So I set a ¾"x 28" Iron Pipe with plastic cap 45353 at an "**Obliterated Position**", at John W. Curo's record distance of 2852.9 feet southerly on line between a found ¾" Iron Pipe at the Closing corner of Sections 1 and 6, which was reestablished by same means as John W. Curo establish his position in 1908, according to same 1908 County Survey Record "B", pages 140-157, and a recover 1" Iron Pipe at the Section common to Sections 13,18,19, and 24, Township 136 North, Ranges 30-31 West. This corner position was witnessed as shown on the face of this document.

Cass County South Zone NAD 1983 (1996) ±0.003 Arc seconds  
N 270320.566  
E 486540.664

Latitude: 46° 37' 24.137"  
Longitude: -94° 31' 12.820"