

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA CONTAINED HEREIN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION.

Robert W. Murray 7-9-15
 ROBERT W. MURRAY DATE

LICENSE NO. 15483

LAND SURVEYOR PROFESSIONAL ENGINEER
 COUNTY SURVEYOR COUNTY ENGINEER

NAD 1983 (1996) CASS COUNTY NORTH ZONE COORDINATES
 N= 321554.000 E= 392879.997 US SURVEY FT
 (COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)



A000613598

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

7/16/2015 10:38:28 AM

AS DOC #: A000613598

PAGES: 3

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY SR Dep TX#: 124298


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. A-5, NORTHWEST CORNER OF SECTION 05, TOWNSHIP 145, RANGE 31, 5TH P.M.
 STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON 06/24/2013 FOUND A(N) CAST IRON MONUMENT DOWN 1.1 FEET BELOW GROUND
DATE
- LEFT MONUMENT AS FOUND, LOWERED MONUMENT, REMOVED MONUMENT (EXPLAIN)
- ON 06/24/2013 PLACED A(N) 2 INCH ALUMINUM SURFACE PLUG FLUSH WITH ROAD SURFACE DIRECTLY OVER THE CAST IRON MONUMENT DOWN 1.1 FEET BELOW GROUND
DATE

SKETCH OF REFERENCE TIES

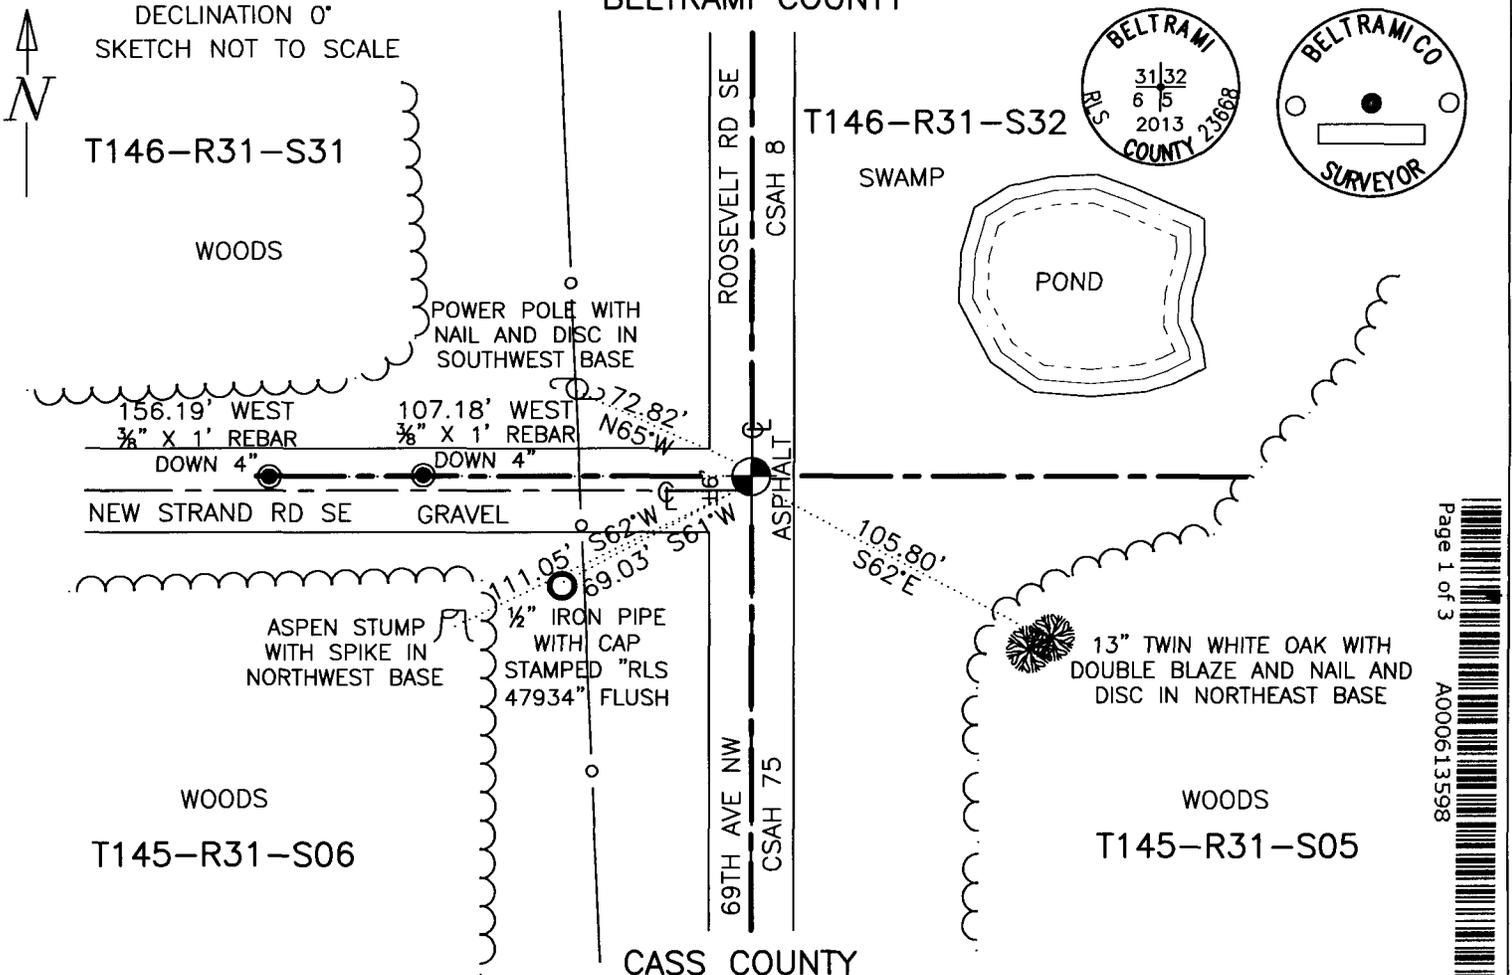

Page 1 of 3
 A000613598

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

STATEMENT OF EVIDENCE:

NORTHWEST CORNER OF SECTION 05, TOWNSHIP 145 NORTH,
RANGE 31 WEST OF THE 5TH PRINCIPAL MERIDIAN CASS
COUNTY, MINNESOTA

In 1875, (Vol. 130) the Original Public Land Survey was run by B. C. Baldwin. A post was set to mark the corner and four bearing trees were recorded as accessories; a 14 inch Norway Pine South 85 degrees East 40 links, a 20 inch Norway Pine South 65 degrees West 28 links, a 14 inch Norway Pine North 34 degrees West 53 links and a 6 inch Aspen North 62 degrees East 42 links.

(5-E1 Roll #2) An undated road plan indicates one bearing tree and two accessories; a Birch North 57 degrees East 55.2 feet, a 10 inch telephone pole North 50 degrees West 40.5 feet and a 6 inch telephone pole South 45 degrees West 45.9 feet.

In 1914, (5-A2 Roll #2) H. S. Todd conducted a survey in the area. He indicates a 2 inch by 2 inch by 48 inch iron marking the corner.

In 1914, (Bk. 74 Pg. 116) H. Todd conducted a survey in Cass County. He found the true corner. He set an iron to mark the corner.

In 1914, ('C' Pg. 92 & Bk. 94 Pg. 69-70) F. A. Donner conducted a survey in Cass County. He found an iron pipe, set by Curo, marking the corner.

In 1915, (Bk. 82 Pg. 9) Molyneux conducted a survey in Cass County. He found a 1 ½ inch by 48 inch iron monument, set by Curo, marking the corner.

In 1915, J. Curo prepared the County Resurvey Plat "E-67" indicating a 1 ½ inch by 48 inch iron monument marking the corner.

In 1932, (Roll 69262) H. Craig, United States Cadastral Surveyor, made a dependent resurvey of Township 146 Range 31. He found no trace of the original or resurvey evidence for this corner. He established the corner position by obliterated methods, using the centerline of county road #8 and the centerlines of the roads running East and West. He set a witness corner North 89 degrees 41 minutes East 50 links.

On August 25, 1983, (FB 830013) A. Larson and D. Graber, of the Beltrami County Remonumentation Crew, searched for Public Land Survey Corners in this area. They found a concrete monument with brass tablet down 8 inches below ground marking a witness corner, North 89 degrees 49 minutes East 33.00 feet. They set 20 inches cast iron monument down 4 inches below road surface marking the corner and recorded three bearing trees; a 5 inch Maple North 79 degrees West 125.30 feet with scribe and spike and disc, a 12 inch Aspen South 62 degrees West 111.05 feet with scribe and spike and disc and an 8 inch Oak South 48 degrees East 103.83 feet with scribe, CLT and spike and disc.

On April 11, 1984, G. E. R. Coulombe, County Surveyor, prepared a Certificate of Corner Location for this Public Land Survey corner with the following statement: "An analysis of the above data indicates that this corner was obliterated. The obliterated position established in 1932, the center line of County Road #8 and the center lines of the roads running East and West, is accepted as the correct position for this Public Land Survey Corner and the witness corner North 89 degrees 41 minutes East 33.00 is accepted as an accessory to this corner".

On May 2, 1986, (FB 830013) B. Dahlin and B. Westrum, of the Beltrami County Remonumentation Crew, searched for Public Land Survey Corners in this area. They found a 20 inch cast iron monument marking the corner. They recorded two accessories; a $\frac{3}{8}$ inch by 1 foot rebar West 107.183 down 4 inches below ground and a $\frac{3}{8}$ inch by 1 foot rebar West 156.191 down 4 inches below ground.

On November 3, 1986, (FB 830013) D. Graber, J. Belair and J. Sweeney, of the Beltrami County Remonumentation Crew, searched for Public Land Survey Corners in this area. They found two accessories; a $\frac{3}{8}$ inch by 1 foot rebar West 107.183 down 4 inches below ground and a $\frac{3}{8}$ inch by 1 foot rebar West 156.191 down 4 inches below ground. They set a cast iron monument down 12 inches below road surface to mark the corner.

On June 30, 1987, (FB 870001) D. Graber, B. Dahlin, C. McGahee, A. Stately and B. Louma, of the Beltrami County Remonumentation Crew, searched for Public Land Survey Corners in this area. They found a cast iron monument down 12 inches below road surface marking the corner, two bearing trees and two accessories; an 8 inch Oak South 48 degrees East 103.83 feet with scribe, CLT and spike and disc, a 12 inch Aspen South 62 degrees West 111.05 feet with scribe and spike and disc, a $\frac{3}{8}$ inch by 1 foot rebar West 107.183 feet down 4 inches below ground and a $\frac{3}{8}$ inch by 1 foot rebar West 156.191 feet down 4 inches below ground. They set a plug flush with road surface directly over the cast iron monument down 12 inches below road surface and recorded one additional bearing tree; an 8 inch White Oak North 39 degrees West 144.19 feet with blaze, scribe, CLT and spike and disc.

On October 7, 1987, G. E. R. Coulombe, County Surveyor, prepared a Certificate of Corner Location for this Public Land Survey corner with the following statement: "An analysis of the above data indicates the location of this Public Land Survey Corner has been perpetuated by the cast iron monument recorded by the Beltrami County Remonumentation Crew in 1983".

On June 24, 2013, (FB 130085) M. Seelen, P. Hennen and N. Jelacie, of Kramer Leas Deleo (KLD), searched for Public Land Survey Corners in this area. They found a cast iron monument down 1.1 feet below road surface marking the corner, in the centerline of road running North-South and approximately 6.0 feet North of centerline extension of road running West. They also found the remains of one bearing tree and two accessories; an Aspen stump South 62 degrees West 111.05 feet with spike in Northwest base, a $\frac{3}{8}$ inch by 1 foot rebar West 107.183 feet down 4 inches below ground and a $\frac{3}{8}$ inch by 1 foot rebar West 156.191 feet down 4 inches below ground. They set a 2 inch aluminum surface plug flush with road surface directly over the cast iron monument down 1.1 feet below road surface and recorded one additional bearing tree and two additional accessories; a 13 inch twin White Oak South 62 degrees East 105.80 feet with double blaze and nail and disc in Northeast base, a power pole North 65 degrees West 72.82 feet with nail and disc in Southwest base and a $\frac{1}{2}$ inch iron pipe with cap stamped "RLS 47934" South 61 degrees West 69.03 feet flush with ground surface.

For additional information contact the Beltrami County Surveyor's Office in Bemidji, Minnesota.