



A000619418

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

2/17/2016 2:08:32 PM

AS DOC #: A000619418

PAGES: 2

REC FEES: 0.00


KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 128981

Page 1 of 2 A000619418

**CERTIFICATE OF LOCATION OF GOVERNMENT CORNER** Index No. E.0 - 19.0

N 1/4 Corner of Section 11, Township 137 N, Range 31, 5 P.M.  
STATE OF MINNESOTA, County of CASS  
At the corner location shown on the sketch:  
 On \_\_\_\_\_ found a \_\_\_\_\_  
date \_\_\_\_\_  
 left monument as found,  lowered monument,  removed monument (explain)  
 On JANUARY 14, 2016 placed a 1/2" REBAR EMBOSSED WITH CAP "RLS 45334", 0.4' ABOVE THE SURFACE  
date \_\_\_\_\_

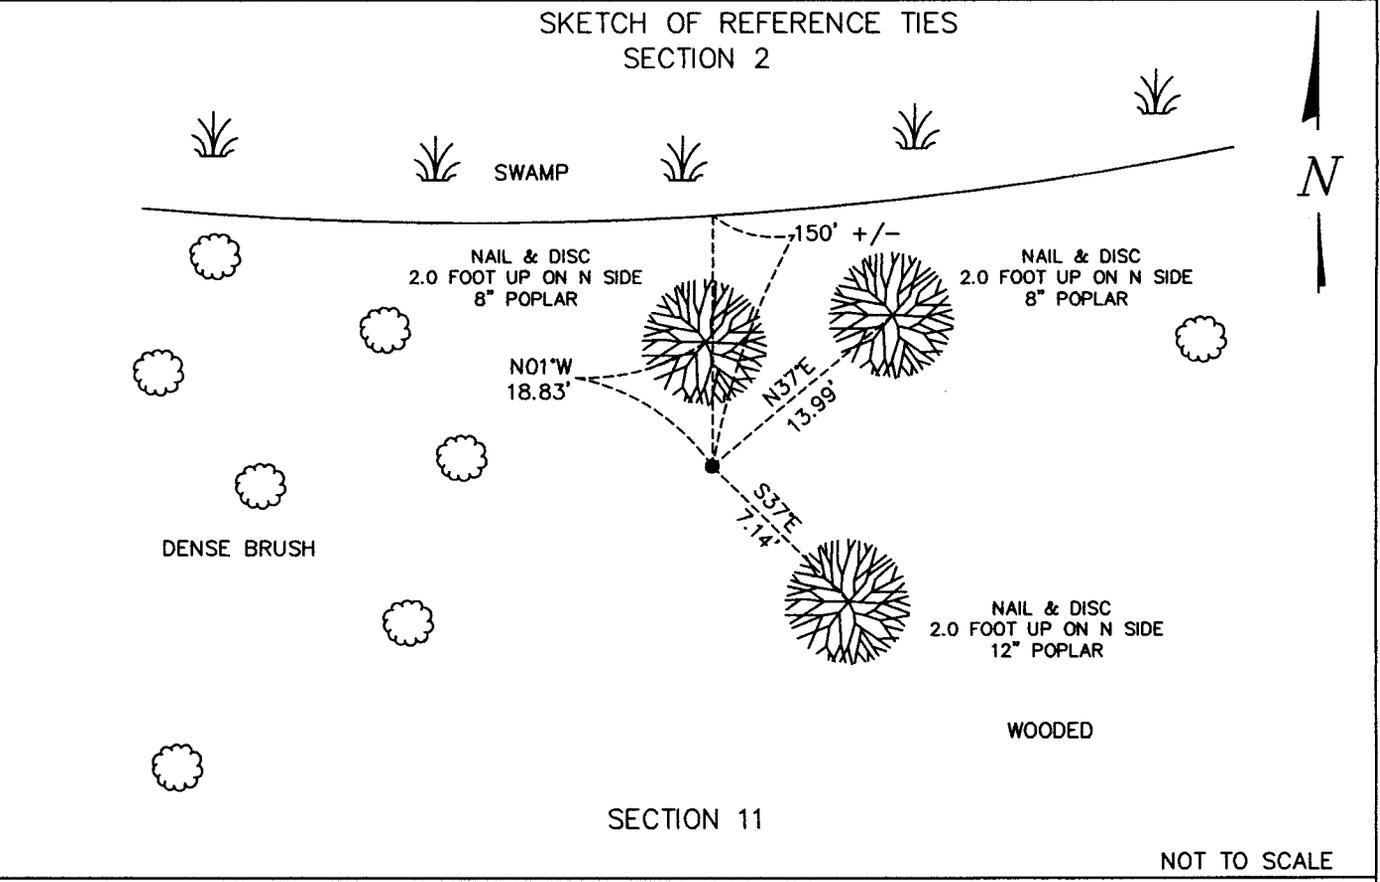

NOT TO SCALE

Statement of evidence relative to this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.  
SIGNATURE Koss M. Ware DATE 12/10/2015 Registration No. 45334  
Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer



E.0 – 19.0

The North quarter corner of Section 11, Township 137 North, Range 31 West of the Fifth Principal Meridian, Cass County, Minnesota, was established as part of the Original Public Land Survey during August of 1870. The Original Public Land Survey was done by Richard Cronk, U.S. Deputy Surveyor. Copies in file in the Cass County Highway Dept. Surveyors Office. The Original monumentation was a set wood post to mark this corner position with bearing tree as follows:

- 8" Balsam N 41°W – 28 links (18.48 feet)
- 7" Birch S 89°W – 45 links (29.77 feet)

Information on file in the MN Historical Society, St. Paul, MN. Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

The Cass County Highway Department was also researched at this time and no mention of this corner was found.

On January 14, 2016 a Survey Mapping Solutions, Inc. (SMS) survey crew, found no evidence of the corner. Set a ½" x 24" rebar with a cap embossed "RLS 45334" at lost position proportionately between NW and NE corners. Located in dense brush cover about 150 +/- feet south of a large bog/slough. Bearing trees as follows:

- 8" Poplar N 01°W – 18.83 feet
- 8" Poplar N 37°E – 13.99 feet
- 10" Poplar S 37°E – 7.14 feet

The recovered and established references for the position are shown on the face of this document. Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by SMS in 2016 is the correct perpetuation of this corner.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Surveyor's Office
- Cass County Engineer's Office
- Westwood Professional Services
- KLD Land Surveying
- Bogart, Pederson & Associates Inc.
- MN DNR, Division of Lands and Minerals, Survey Section
- MN DOT District Surveys Office in Baxter

Section Corner observed by GPS

Datum: Cass County South Coordinates  
Geodetic Position NAD 83 (1996 HARN Adj.)

N = 299577.719  
E = 474786.050