



A000619422

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

2/17/2016 2:08:36 PM

AS DOC #: A000619422

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 128981

Page 1 of 2 A000619422

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Index No. J.O - 17.0

NE Corner of Section 15, Township 137 N, Range 31, 5 P.M.  
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

On NOVEMBER 24, 2015 found a 1/2" IRON MONUMENT WITH CAP EMBOSSED "RLS 42619" AND FLUSH  
date

WITH EXISTING ROAD SURFACE


left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ date placed a \_\_\_\_\_

SECTION 10

SKETCH OF REFERENCE TIES

SECTION 11

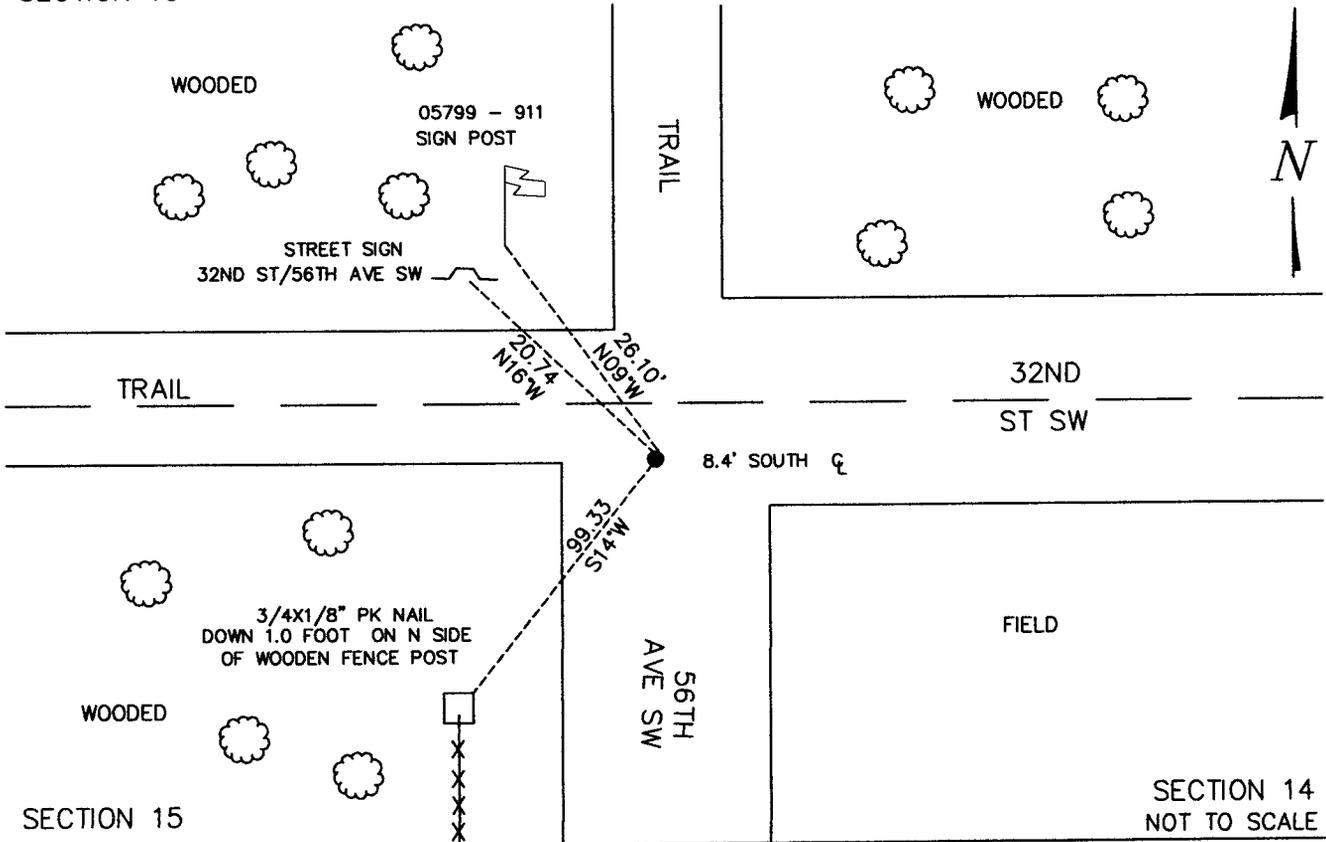

Statement of evidence relative to this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE Kass M. Norby

DATE 11/24/2015 Registration No. 45334

Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer



J.0 – 17.0

The Northeast corner of Section 15, Township 137 North, Range 31 West of the Fifth Principal Meridian, Cass County, Minnesota, was established as part of the Original Public Land Survey during August of 1870. The Original Public Land Survey was done by Richard Cronk, U.S. Deputy Surveyor. The Original monumentation was a set wood post to mark this corner position with bearing tree as follows:

- 10" Aspen S 30°E – 9 links ( 5.94 feet)
- 9" Aspen N 54°W – 55 links ( 36.3 feet)
- 8" Aspen N 24°E – 16 links ( 10.56 feet)
- 10" Aspen S 40° W – 17 links ( 11.22 feet)

Information on file in the MN Historical Society, St. Paul, MN. Copies in file in the Cass County Highway Dept. Surveyors Office (CCSD/SO).

On September 13, 1920, Mose Morris and Bert Anderson, Cass County Surveyors, re-surveyed the Bungo Township Road. Measured 5444 feet and found wood post in center of the road, Survey Record Number 489 in Cass Book "C", Page 567 with bearing tree as follows:

- SW corner of School House S 40°15'E – 141.4 feet
- 12" Burr Oak S 55°E – 93.0 feet

Information on file in CCHD/SO.

On January 21, 2004, Kramer and Leas Land Surveyor Jarrett Leas set an iron monument embossed with cap number "RLS 42619". The Certificate of Survey was submitted to Cass County and received on October 29, 2004.

On November 23, 2015 a Survey Mapping Solutions, Inc. (SMS) survey crew located a 1/2" iron monument embossed with cap number "RLS 42619" lying 8.4 feet south of the centerline of 32<sup>nd</sup> Street SW and 4 inches below the surface.

The recovered and established references for the position are shown on the face of this document. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument set by Jarrett Leas is the correct perpetuation of this corner.

Contacts pertaining to this corner are as follows:

- Cass County Recorder's Office
- Cass County Surveyor's Office
- Cass County Engineer's Office
- Westwood Professional Services
- KLD Land Surveying
- Bogart, Pederson & Associates Inc.
- MN DNR, Division of Lands and Minerals, Survey Section
- MN DOT District Surveys Office in Baxter

Section Corner observed by GPS

Datum: Cass County South Coordinates  
Geodetic Position NAD 83 (1996 HARN Adj.)

N = 294319.001  
E = 472109.670