



A000621625

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/26/2016 12:38:08 PM

AS DOC #: A000621625

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR Dep TX#: 130805

Twp 141 Rge 27 Index No. R.0-09.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast corner of Section 29, Township 141 N., Range 27 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 9 July 2015 found a 2 inch iron pipe with GLO brass cap, up 0.9 foot,
in Cedar swamp.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES NOT TO SCALE

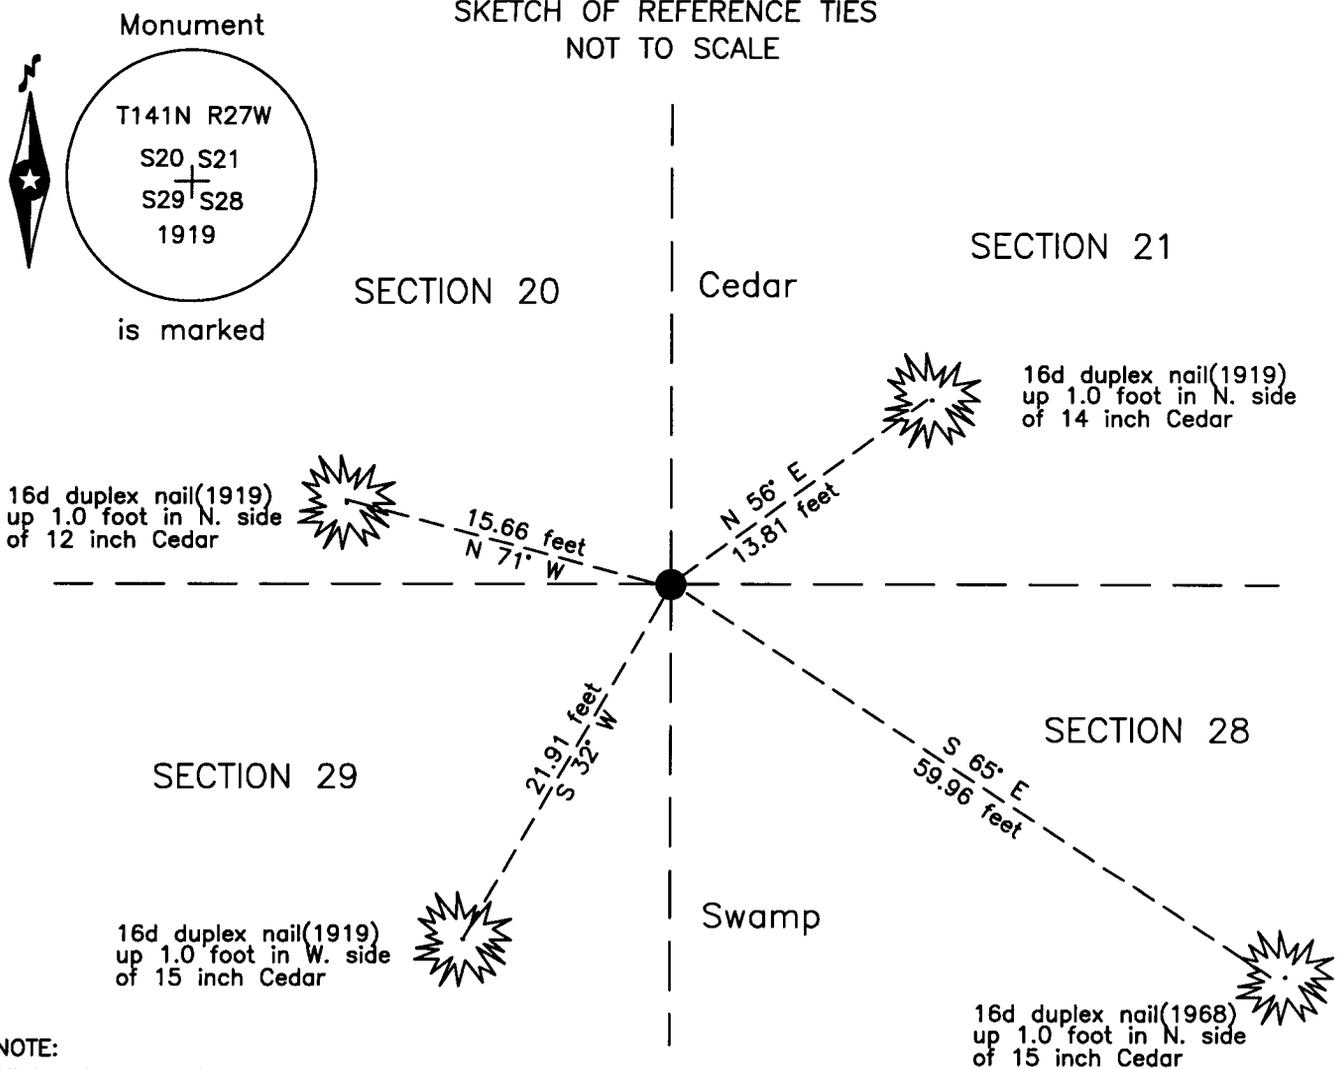

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 5/25/16 MN License No. 21367



**Index No. R.0-09.0**Statement of Evidence**Northeast corner Section 29, Township 141 North, Range 27 West, 5th Principal Meridian.**

Jan. 1874 P.H. Conger, General Land Office (GLO) Deputy Surveyor, in the notes of the subdivision of Township 141 North Range 27 West, set a post for the original corner and referenced as follows:

5" Cedar	S 16° E	9 links (5.94 feet)	8" Tamarack	N 37° E	26 links (17.16 feet)
7" Tamarack	N 10° W	12 links (7.92 feet)	6" Cedar	S 47° W	17 links (11.22 feet)

June 1919 E.G. Harrington, GLO U.S. Cadastral Engineer, in the notes of the reestablishment of a portion of the exteriors and subdivisional lines of this township states "The cor. of secs. 20, 21, 28 and 29, which is the remains of a decayed wooden stake." He lists an original witness as follows:

12" Tamarack N 37° E 26 links (17.16 feet), remains of original scribe marks

5" Cedar stump S 16° E 9 links (5.94 feet), remains of original scribe marks

He set an iron post, 3 feet long and 2 inch diameter with brass cap and witnessed as follows:

10" Cedar	N 56°15' E	21 links (13.86 feet)	8" Cedar	S 32°15' W	34 links (22.44 feet)
-----------	------------	-----------------------	----------	------------	-----------------------

10" Cedar	S 67°15' E	57 links (37.62 feet)	8" Cedar	N 70°45' W	24 links (15.84 feet)
-----------	------------	-----------------------	----------	------------	-----------------------

The above records are on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

June 1923 J.H. Flynn, Cass County Deputy Surveyor, Curo Book 190, page 47 and Survey Record 527, Book D, page 116, on file in the CCHD/SO states "at 27+45 North Sec. line S. 28, 190' West to S.W. Cor".

Dec. 1935 J.R. Homala, CCC Forester, United States Department of Agriculture, Forest Service (USFS), Form 874-9, on file in the Cass Lake Office, indicates corner is iron pipe with brass cap, up 18 inches and witnesses as follows:

10" Cedar	S 32° W	32 links (21.12 feet)	8" Cedar	N 76° W	23 links (15.18 feet)
-----------	---------	-----------------------	----------	---------	-----------------------

10" Cedar	N 55° W	20 links (13.20 feet)			
-----------	---------	-----------------------	--	--	--

June 1968 J. Ekstrom, technician, USFS, Field Book 2, page 80, on file in the Cass Lake Office, found a 2 inch iron pipe with brass cap and 1919 GLO bearing trees as follows:

16" Cedar	N 56° E	13.9 feet	16" Cedar	S 32° W	22.4 feet
-----------	---------	-----------	-----------	---------	-----------

12" Cedar	N 70° W	15.8 feet			
-----------	---------	-----------	--	--	--

Added new witness as follows:

12" Cedar	S 65° E	60.14 feet			
-----------	---------	------------	--	--	--

Feb. 1971 W.H. Okerman, LS 6807, Land Surveyor for the USFS, filed an Affidavit as to Location of Government Corner on the 1968 information in the Cass County Recorders Office Document Number A000584227.

June 1977 C.R. Krause, technician, USFS, Field Book 2, page 80, on file in the Cass Lake Office, found GLO brass cap and all witnesses in good condition.

July 2015 B. Hippen, technician, records of the CCHD/SO, found a 2 inch pipe with GLO brass cap, up 0.9 foot in a Cedar swamp, 200 feet, more or less west of centerline of County Road Number 129 and witnessed as follows:

12" Cedar(1919)	N 56° E	13.81 feet	15" Cedar(1919)	S 32° W	21.91 feet
-----------------	---------	------------	-----------------	---------	------------

12" Cedar(1919)	N 71° W	15.66 feet	15" Cedar(1968)	S 65° E	59.96 feet
-----------------	---------	------------	-----------------	---------	------------

The monument, together with the recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by CCHD/SO in 2015 is the correct perpetuation of this corner.

County Coordinates (Cass County North)

Northing 174253.17

Easting 525185.87