



A000621630

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/26/2016 12:38:13 PM

AS DOC #: A000621630

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY SR \_\_\_\_\_ Dep TX#: 130805

Twp 140 Rge 27 Index No. E.0-11.0

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter corner of Section 9, Township 140 N., Range 27 W., 5th P.M.  
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 8 Aug 2011 found \_\_\_\_\_ barbed wire down 4.5 feet in road.

left monument as found     lowered monument     removed monument (explain)

On 19 May 2016 placed an 1 inch by 30 inch aluminum tube with aluminum cap,  
down 0.05 foot, 1 foot south of centerline County Road #7.

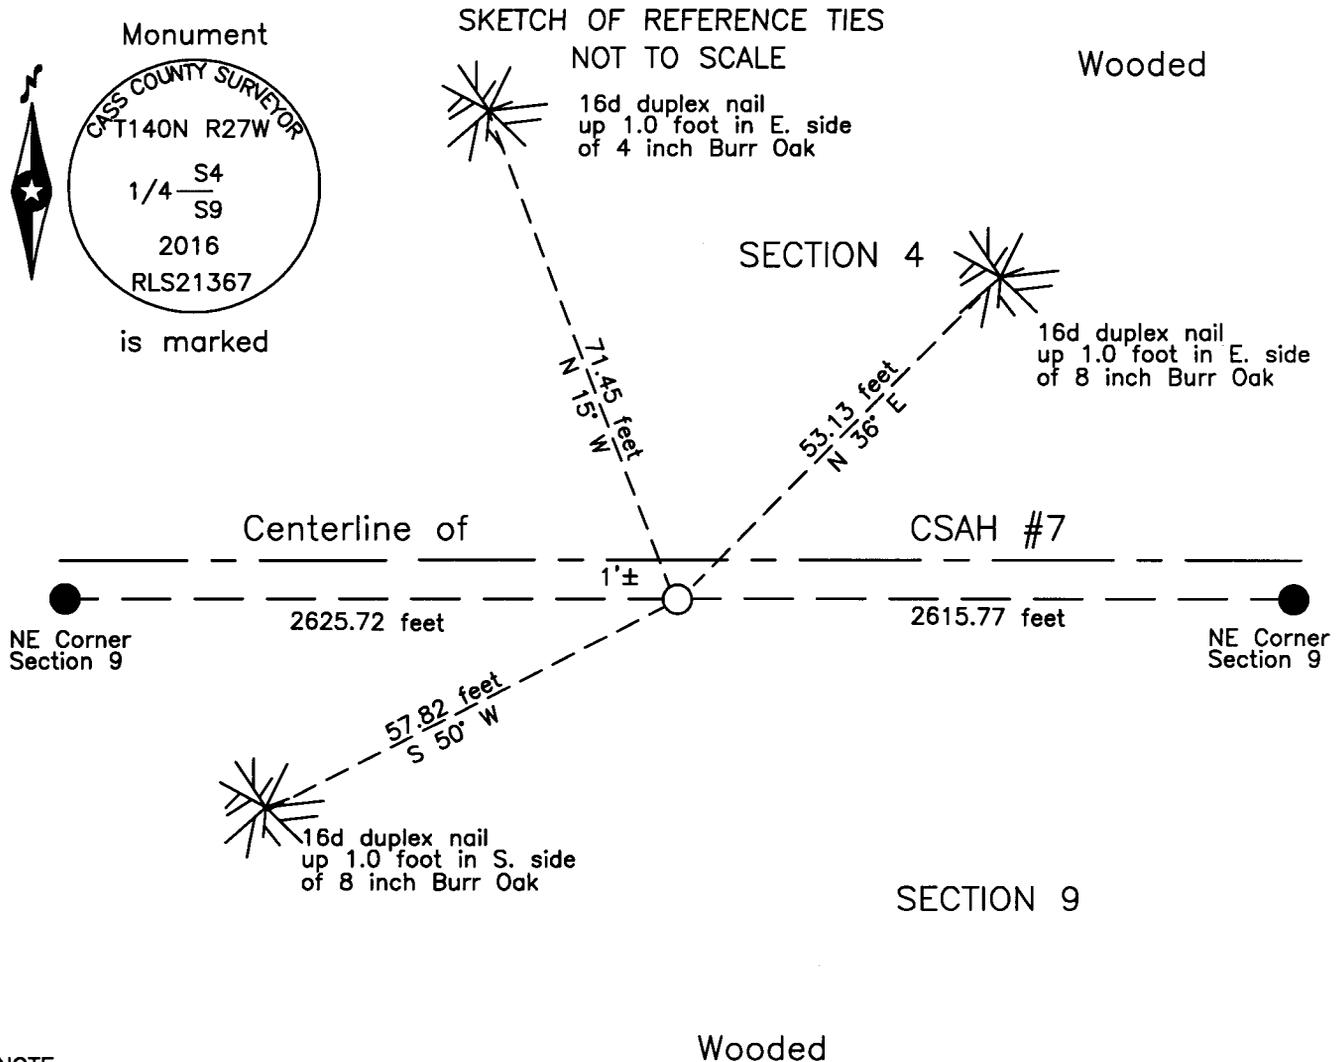

NOTE:  
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor

Date 5/25/16 MN License No. 21367

Page 1 of 2  
A000621630



Statement of Evidence

North Quarter corner of Section 9, Township 140 North, Range 27 West, 5th Principal Meridian.

Dec. 1873 F.G. Winston, General Land Office (GLO) Deputy Surveyor, notes for the subdivision of Township 140 North, Range 27 West, set a post for the original corner and referenced it as follows:  
10" Tam. N 44°30' E 40 links (26.40 feet) 9" Tam. N 72°30' E 99 links (65.34 feet)  
The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

1963 Cass County Highway Department(CCHD), S.P. 11-607-02, on file in the CCHD, plan indicates subject corner assumed at Station 321+04.

Jan 1996 W.E. Curo, LS 11395, File 2386 for Gary Slagle, on file in the CCHD/SO, breakdown of Section 4 indicates the subject corner at a lost position.

Aug. 2011 B. Hippen, technician and P. Swentkofske, CCHD equipment operator, records of the CCHD/SO, prior to reconstruction of CSAH # 007, excavated a 28 foot east-west by 8 foot north-south area based on record dimensions. The dig was 5.5 feet deep to natural soil. Two strands of Barbed Wire fence were recovered down 4.5 feet, running South from excavation, no evidence of this wire was recovered in wooded area to south.

May 2016 B. Hippen, technician, records of the CCHD/SO, set a 1 inch by 30 inch aluminum tube with aluminum cap, down 0.05 foot, 1 foot, more or less, south of new centerline of CSAH #7, at the intersection of the barbed wire and the line between the recovered northeast and northwest corners of Section 9 and witnessed as follows:  
4" Burr Oak N 15° W 71.45 feet 8" Burr Oak N 36° E 53.13 feet  
8" Burr Oak S 50° W 57.82 feet

The recovered and established witnesses for this corner position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set in 2016 by the CCHD/SO, is the accepted location of this corner.

County Coordinates (Cass County North)

Northing 158215.92  
Easting 528327.26