



**A000627519**  
**OFFICE OF THE COUNTY RECORDER**  
**CASS COUNTY, MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**12/29/2016 10:36:48 AM**  
**AS DOC #: A000627519**  
**PAGES: 2**  
**REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**CASS COUNTY RECORDER**  
**BY SR \_\_\_\_\_ Dep TX#: 135683**

Index No. E.0-15.0


**CERTIFICATE OF LOCATION OF GOVERNMENT CORNER**

North Quarter Corner of Section 10, Township 137 N., Range 30 W., 5th P.M.  
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10-12-16 found A Capped 1/2 inch (inside diameter) Iron Pipe  
RLS#43932.  
 left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_  
 DATE \_\_\_\_\_

SKETCH OF REFERENCE TIES  
 NOT TO SCALE

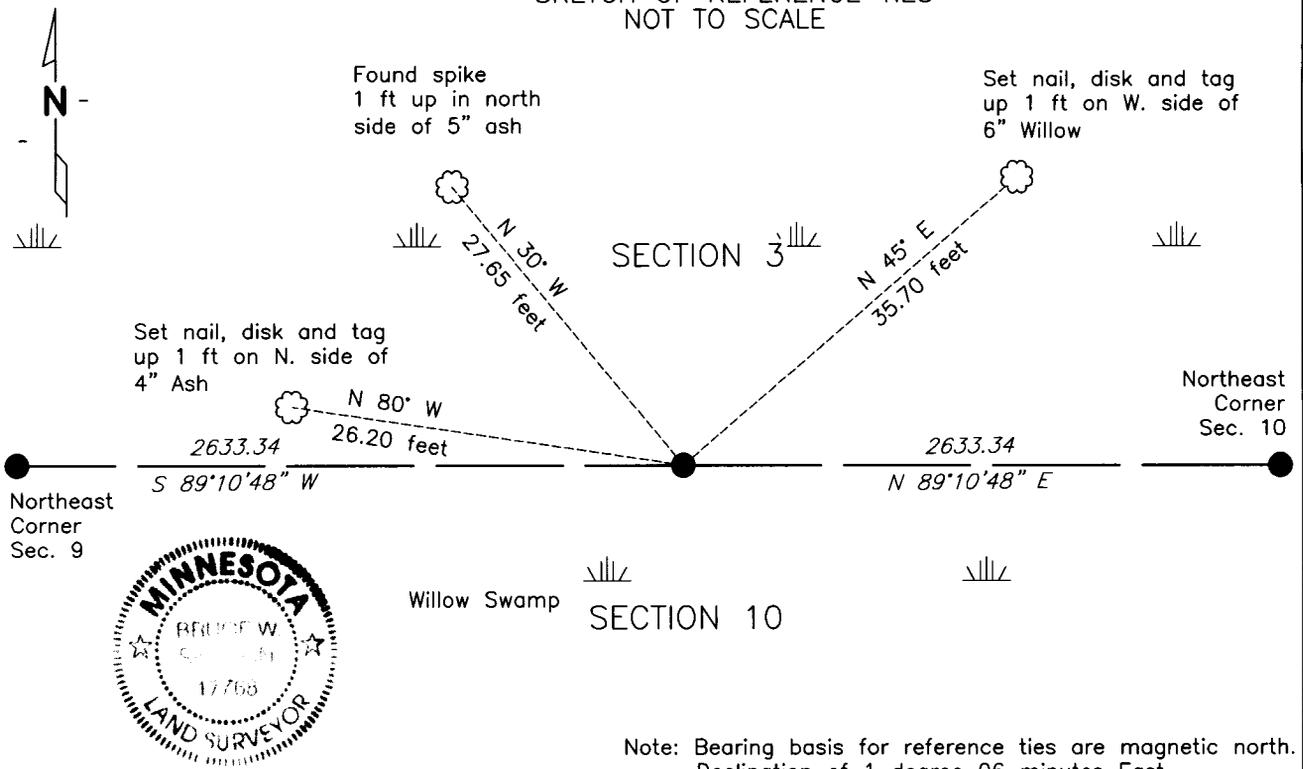

Note: Bearing basis for reference ties are magnetic north.  
 Declination of 1 degree 06 minutes East.

NAD83 (1996 ADJUSTMENT)  
 CASS COUNTY SOUTH DATUM

N= 299622.225  
 E= 501290.868

Statement of evidence relative to  
 this corner is on back of page

I hereby certify that this document and the  
 data contained herein was prepared by me or  
 under my direct supervision.

Bruce W. Skipton 12-16-16  
 BRUCE W. SKIPTON DATE

Registration No. 17768

- Land surveyor,
- County Surveyor,



Index No. E.0-15.0

**Statement of Evidence:**

**North Quarter corner Section 10, Township 137 North, Range 30 West, 5<sup>th</sup> Principal Meridian.**

October 1870 Richard Cronk, General Land Office (GLO) Deputy Surveyor, notes for the subdivision of Township 137 North, Range 30 West, set a post for the original corner and referenced it as follows:

9" Tamarac	N 60 degrees W	14 links (9.24 feet)
8" Tamarac	S 28 degrees E	17 links (11.22 feet)

The above record is on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyors Office (CCHD/SO).

August 1912 A.W. Moulster, Ditch Notes Shelf 1, Book 011, page 11, on file at CCHD/SO, indicates both bearing trees present.

October 2016 Bolton and Menk's field crews found a ½ inch (inside diameter) capped iron pipe, RLS #43932 at the location for this corner. After further analysis of the recovered record data, field evidence and survey measurements, the found capped ½ inch iron pipe is accepted as the location for this USPLSS corner. Reference ties established for the position are shown on the face of this document (Page 1 of 2).