



A000630642

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/10/2017 2:06:43 PM

AS DOC #: A000630642

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 138309

Page 1 of 2  
A000630642

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Index No. R.0 - 3.0

N 1/4 Corner of Section 30, Township 136, Range 32, 5 P.M.  
STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On \_\_\_\_\_ date found a \_\_\_\_\_

left monument as found,  lowered monument,  removed monument (explain)

On MARCH 14, 2017 date placed a 1/2" IRON PIPE WITH CAP #45334 AND 8.6± FEET NORTH

#### SKETCH OF REFERENCE TIES

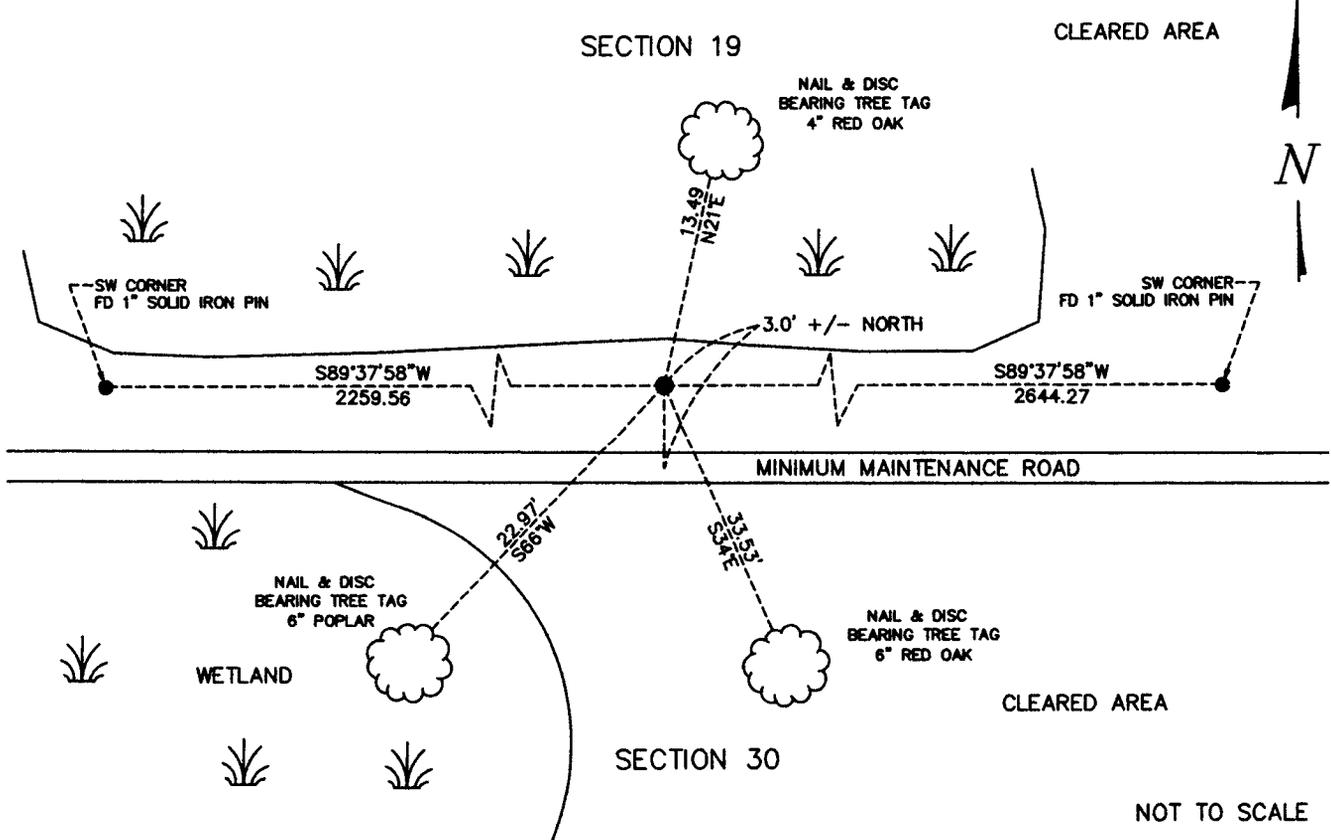

NOT TO SCALE

Statement of evidence relative to this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE *Kathryn M. Norby*

DATE 3-31-2017 Registration No. 45334

Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer



R.0 – 3.0

The North Quarter Corner of Section 30, Township 136 North, Range 32 West of the Fifth Principal Meridian, Cass County, Minnesota, was established as part of the Original Public Land Survey during 1866. The Original Public Land Survey was done by Oscar Garrison, U.S. Deputy Surveyor. The Original monumentation was a set wood post to mark this corner position with bearing tree as follows:

14" Y. Pine N85°E – 418 links (275.88 feet)

Information on file in the MN Historical Society, St. Paul, MN. Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

September 1903, W.M. Hallett, Cass County Engineer, Shows road on the North line of Section 30, on file in the Road Calendar B, page 5.

Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

October 1904, W.M. Hallett, Cass County Engineer, Surveyor's Report shows road on the North line of Section 30, on file in Township Road Orders.

Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

On March 13, 2017 Survey Mapping Solutions, Inc. (SMS) survey crew searched for the corner and found nothing. Calculated a new position based on a lost position proportionately between SW and SE corners.

On March 14, 2017, a Survey Mapping Solutions, Inc. (SMS) survey crew set a ½" rebar with a cap stamped "RLS 45334" north of existing trail 3 ± feet.

The recovered and established references for the position are shown on the face of this document. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument set in 2017 by SMS is the correct perpetuation of this corner. Witness corners are as follows:

Nail & Disc in 4" Red Oak, N21°E – 13.49 feet  
Nail & Disc in 6" Red Oak, S21°E – 33.53 feet  
Nail & Disc in 6" Poplar, S66°W – 22.97 feet  
3' +/- North of the centerline of the East –West Minimum Maintenance Road

Contacts pertaining to this corner are as follows:

Cass County Recorder's Office  
Cass County Surveyor's Office  
Cass County Engineer's Office  
MN DNR, Division of Lands and Minerals, Survey Section  
MN DOT District Surveys Office in Baxter

Section Corner observed by GPS  
Datum: Cass County South Coordinates  
Geodetic Position NAD 83 (1996 HARN Adj.)

N = 251756.475  
E = 423525.524