



A000630648

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

5/10/2017 2:06:49 PM

AS DOC #: A000630648

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 138309

Page 1 of 2 A000630648

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Index No. G.0 - 21.0

E 1/4 Corner of Section 11, Township 136, Range 32, 5 P.M.  
STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On \_\_\_\_\_ found a \_\_\_\_\_  
date

left monument as found,  lowered monument,  removed monument (explain)

On March 21, 2017 placed a 5/8" PIPE EMBOSSED WITH CAP #45334 0.3' ABOVE GROUND  
date

#### SKETCH OF REFERENCE TIES

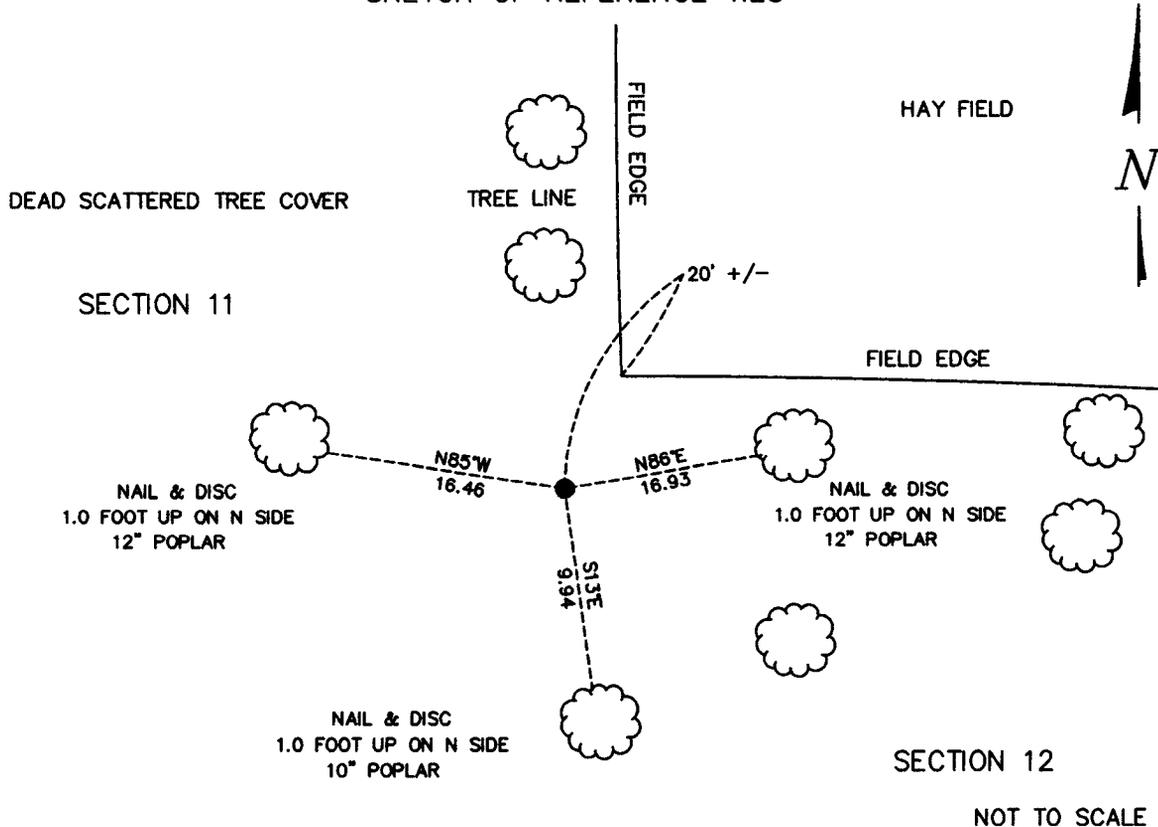

Statement of evidence relative to this corner location is on back of this page.

I hereby certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE [Signature]

DATE 3-31-2017 Registration No. 45334

Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer



G.0 – 21.0

The East Quarter Corner of Section 11, Township 136 North, Range 32 West of the Fifth Principal Meridian, Cass County, Minnesota, was established as part of the Original Public Land Survey during 1866. The Original Public Land Survey was done by Oscar Garrison, U.S. Deputy Surveyor. The Original monumentation was a set wood post to mark this corner position with bearing tree as follows:

24" W. Pine S51°30'E – 45 links (29.70 feet)  
6" W. Birch N34°30'W – 38 links (25.08 feet)

Information on file in the MN Historical Society, St. Paul, MN. Copies in file in the Cass County Highway Dept. Surveyors Office (CCHD/SO).

On March 13, 2017 Survey Mapping Solutions, Inc. (SMS) survey crew searched for the corner and found nothing. Calculated a new position based on a lost position proportionately between NE and SE corners.

On March 21, 2017, a Survey Mapping Solutions, Inc. (SMS) survey crew set a 5/8" pipe with a cap stamped "RLS 45334" in centerline of 56th Street SW.

The recovered and established references for the position are shown on the face of this document. Analysis of the recovered data, field evidence and survey measurements, indicates that the monument set in 2017 by SMS is the correct perpetuation of this corner. The position fits well with the occupation of the field edges and exiting fence line south. Witness corners are as follows:

Nail & Disc in a 12" Poplar, N85°W – 16.46 feet  
Nail & Disc in a 10" Poplar, S13°E – 9.94 feet  
Nail & Disc in a 12" Poplar, N86°E – 16.93 feet

Contacts pertaining to this corner are as follows:  
Cass County Recorder's Office  
Cass County Surveyor's Office  
Cass County Engineer's Office  
MN DNR, Division of Lands and Minerals, Survey Section  
MN DOT District Surveys Office in Baxter

Quarter Corner observed by GPS  
Datum: Cass County South Coordinates  
Geodetic Position NAD 83 (1996 HARN Adj.)

N = 264894.845  
E = 447357.857