



A000630698

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

5/11/2017 4:01:44 PM

AS DOC #: A000630698

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 138347

Page 1 of 2 A000630698

Twp 136 Rge 30 Index No. V.0-15.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter corner of Section 34, Township 136 N., Range 30 W., 5th P.M.

State of Minnesota, County of Cass


At the corner location shown on the sketch:

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 21 Mar 2017 placed an 1 inch by 30 inch aluminum tube with aluminum cap,
up 0.6 foot, 10 feet± north of fence corner.

SKETCH OF REFERENCE TIES
NOT TO SCALE

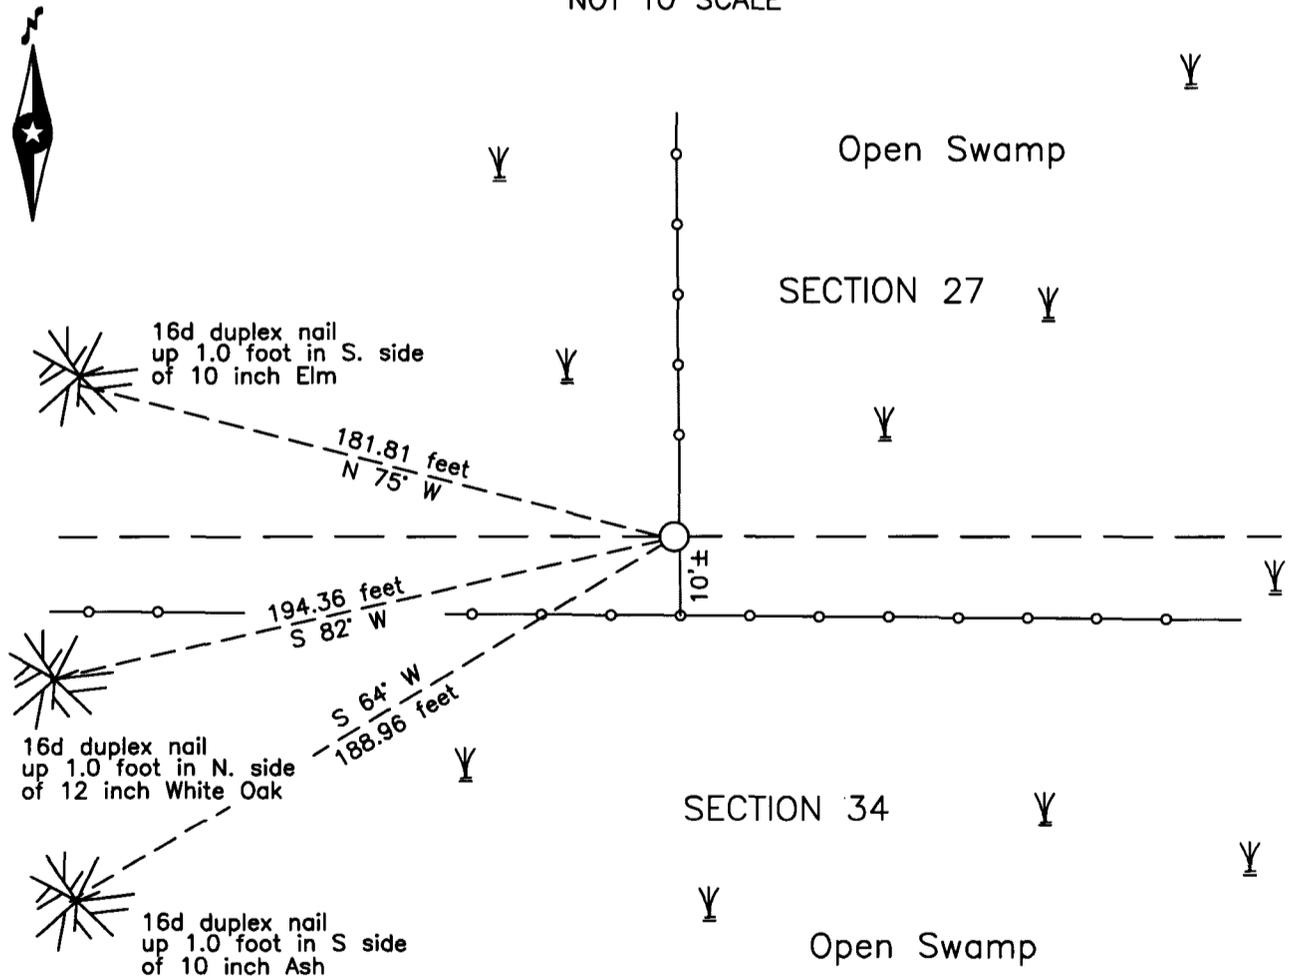

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 5/10/17 MN License No. 21367



Index No. V.0-15.0

Statement of Evidence

North Quarter corner of Section 34, Township 136 North, Range 30 West, 5th Principal Meridian.

Aug. 1870 R. Cronk, General Land Office (GLO) Deputy Surveyor in the notes of the subdivision of Township 136 North, Range 30 West, set a post for the original corner and referenced it as follows:
7" Tamarack S 14° W 75 links (49.50 feet) 8" Tamarack N 5° E 10 links (6.60 feet)
Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).

March 2017 B. Hippen, technician, records of the CCHD/SO, set a 1 inch by 30 inch aluminum Cass County monument at the lost position, midway and on line between the northeast and northwest corners of Section 34, 10 feet more or less, north of fence corner and witnessed as follows:
10" Elm N 75° W 181.81 feet 12" W. Oak S 82° W 194.36 feet
10" Ash S 64° W 188.96 feet

The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument set by the CCHD/SO in 2017 is the accepted location of this corner.

County Coordinates (Cass County South)

Northing 246560.82
Easting 505422.83