



A000636504

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

11/27/2017 2:09:15 PM

AS DOC #: A000636504

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY MW Dep TX#: 142902

Page 1 of 2 A000636504

Twp 136 Rge 29 Index No. E.0-09.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast corner of Section 8, Township 136 N., Range 29 W., 5th P.M.
State of Minnesota, County of Cass

At the corner location shown on the sketch:

On 18 July 2017 found a 2.25 inch outside diameter iron pipe, down 2.4 feet,
on centerline of County Road Number 114.

left monument as found lowered monument removed monument (explain)

On 20 Oct 2017 placed an 1 inch by 30 inch aluminum tube with aluminum cap,
down 0.05 foot, on centerline County Road #114.

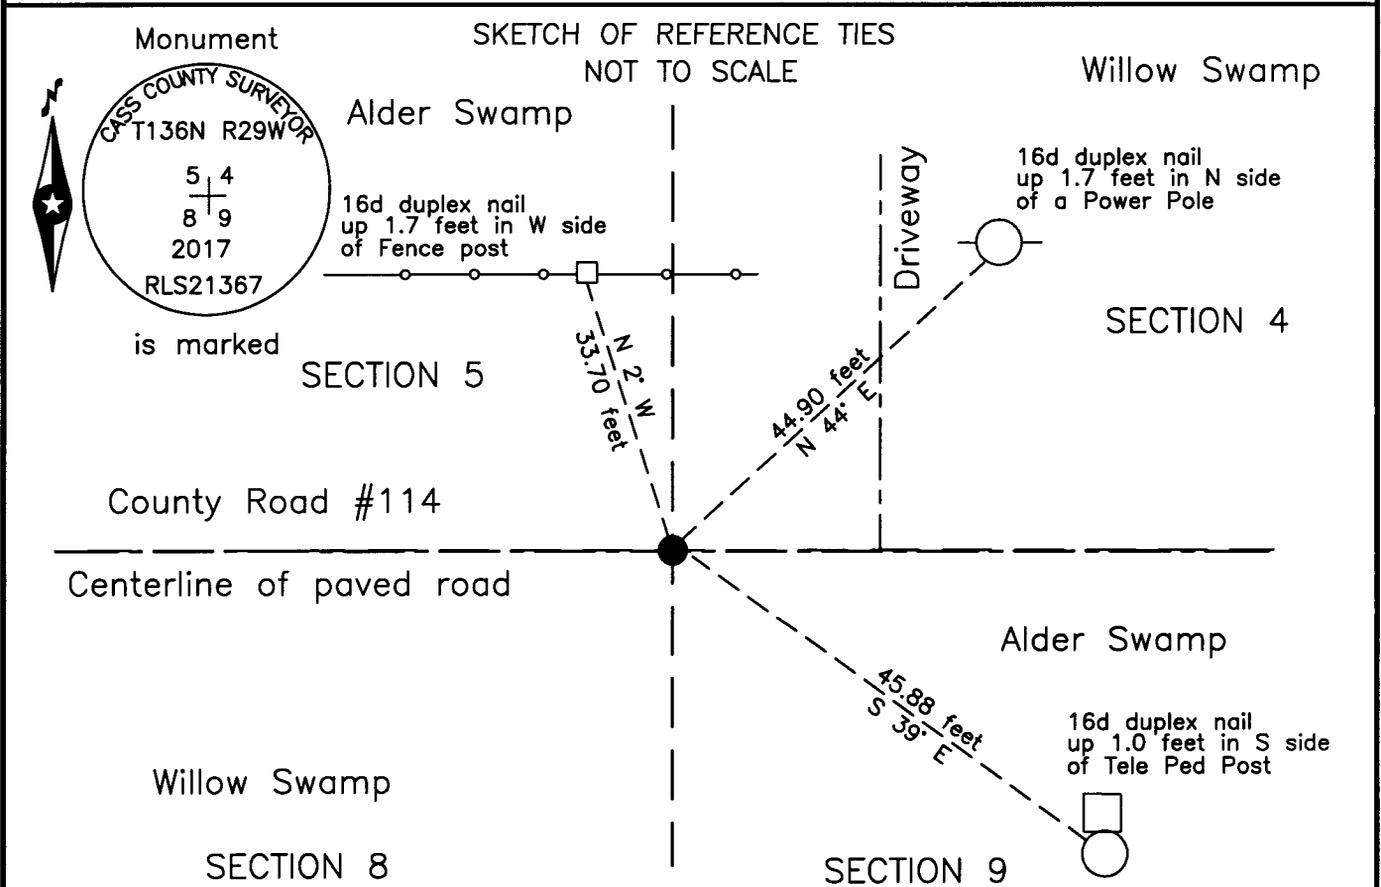

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 11/22/17 MN License No. 21367

**Index No. E.0-09.0**Statement of Evidence**Northeast corner of Section 8, Township 136 North, Range 29 West, 5th Principal Meridian.**

- Dec. 1870 Wm.P. Allen, General Land Office (GLO) Deputy Surveyor in the notes of the subdivision of Township 136 North, Range 29 West, set a post for the original corner and referenced it as follows:
 6" W. Birch S 13° W 21 links (13.86 feet) 6" Tam N 18° W 12 links (7.92 feet)
 7" W. Birch S 34° E 35 links (23.10 feet) 7" Tam N 72° E 15 links (9.90 feet)
 Said records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- Aug. 1903 Loon Lake Township, Supervisors' Road Order "6", on file in the CCHD/SO, states Beginning at the Southeast corner of the South East quarter of Section number four(4) in Township number one hundred thirty six(136) North of Range Twenty nine(29) West in the County of Cass and state of Minnesota thence West three(3) miles along and on the section line.
- June 1911 W.H. Luffman, Loon Lake Township, Supervisors' Road Order "11", on file in the CCHD/SO, indicates he surveyed a road between the East Quarter and Northeast corners of Section 8.
- May 1916 F.F. Wilson, Curo Book 76, page 18, on file in the CCHD/SO, states "SW corner sec 4 and place post as the true sec corner from witnesses corners plainly marked":
 Pine stump N 32° E 184 = Pine stump S 35° E 97 =
- June 1916 J.W. Curo, LS 1428, Cass County Surveyor, Section 4 Subdivision, on file in the Cass County Recorders Office indicates Monument set from Original B.T.'s.
- July 1916 J.F. Pomasel, LS 1728, Deputy Cass County Surveyor, Survey Record Number 428, Book C, page 230 and Curo Book 62, page 40 and 41, on file in the CCHD/SO, states "Beginning at the SW cor of sec 4-136-29 and running West" and corner 2 1/4" pipe. Bearing trees to S.W. cor. sec. 4-136-29." Than lists the following:
 30" N. Pine stump S 29°35' E 64 feet 15" N. Pine N 34°05' E 97.8 feet
 On page 231 states S.E. cor. sec. 5 Gal. Pipe.
- Jan. 1917 E.B. Horst, LS 376, Deputy County Surveyor, Survey Record Number 404, Book C, page 148 and Curo Book 64, page 86, on file in the CCHD/SO, states "At 5346.0 N. iron monument at northwest corner of section 9. No changes made.
- Oct. 1918 J.D. Middleton, Deputy County Surveyor, Record Number 402, Book C, page 138, on file in the CCHD/SO, states "Iron Monuments had been set at the corner to sections 4, 5, 8 & 9." And "Begin the Trial line at the cor. to secs. 4,5,8,9".
- March 1919 J.H. Flynn, Cass County Surveyor, Section 8 Subdivision, on file in the Cass County Recorders Office indicates Monument set from Original B.T.'s.
- 1940 Curo file 110
- Oct. 1997 D.S. Landecker, LS 17008, Certificate of Survey and Section Breakdown sheet, on file in the Landecker & Associates, Pequot Lakes office, indicates calculated split between northwest corner section 8 and northeast corner of section 9 and placed on road centerline at the Northeast corner of Section 8.
- Nov. 2003 B. Hippen and T. Anderson, technicians, records of the CCHD/SO, found a 1 1/2 inch outside diameter, iron pipe, RLS 7452, down 0.6 foot, on centerline County Road #114 and witnessed as follows:
 Tel Ped Post S 39° E 45.88 feet Power Pole N 44° E 44.90 feet
 Fence Post N 02° W 33.70 feet
- Sept. 2007 B. Hippen, technician, records of the CCHD/SO, found a 7/8 inch outside diameter iron pipe down 0.2 foot, after road construction is completed, on centerline County Road #114.
- July 2017 B. Hippen technician, records of the CCHD/SO, found a 2.25 inch outside diameter iron pipe, down 2.4 feet below 7/8 inch iron pipe, on centerline County Road #114 and witnessed as follows:
 Tel Ped Post S 39° E 45.88 feet Power Pole N 44° E 44.90 feet
 Fence Post N 02° W 33.70 feet
- Oct. 2017 B. Hippen, technician, records of the CCHD/SO, set an aluminum Cass County monument, down 0.05 foot, on new centerline County Road #114, over 2.25 inch iron pipe.
 The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by CCHD/SO is the accepted location of this corner.

County Coordinates (Cass County South)

Northing 267948.17

Easting 528780.18