



A000637924

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/18/2018 11:01:03 AM

AS DOC #: A000637924

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SR _____ Dep TX#: 143948

Twp 142 Rge 28 Index No. L.0-17.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter corner of Section 15, Township 142 N., Range 28 W., 5th P.M.
State of Minnesota, County of Cass


At the corner location shown on the sketch:

On 4 May 2017 found a 7/8 inch outside diameter iron pipe, top broken,
down 0.3 foot, 4 feet±, east of centerline County Road #157.

left monument as found lowered monument removed monument (explain)

On _____ placed _____

SKETCH OF REFERENCE TIES NOT TO SCALE

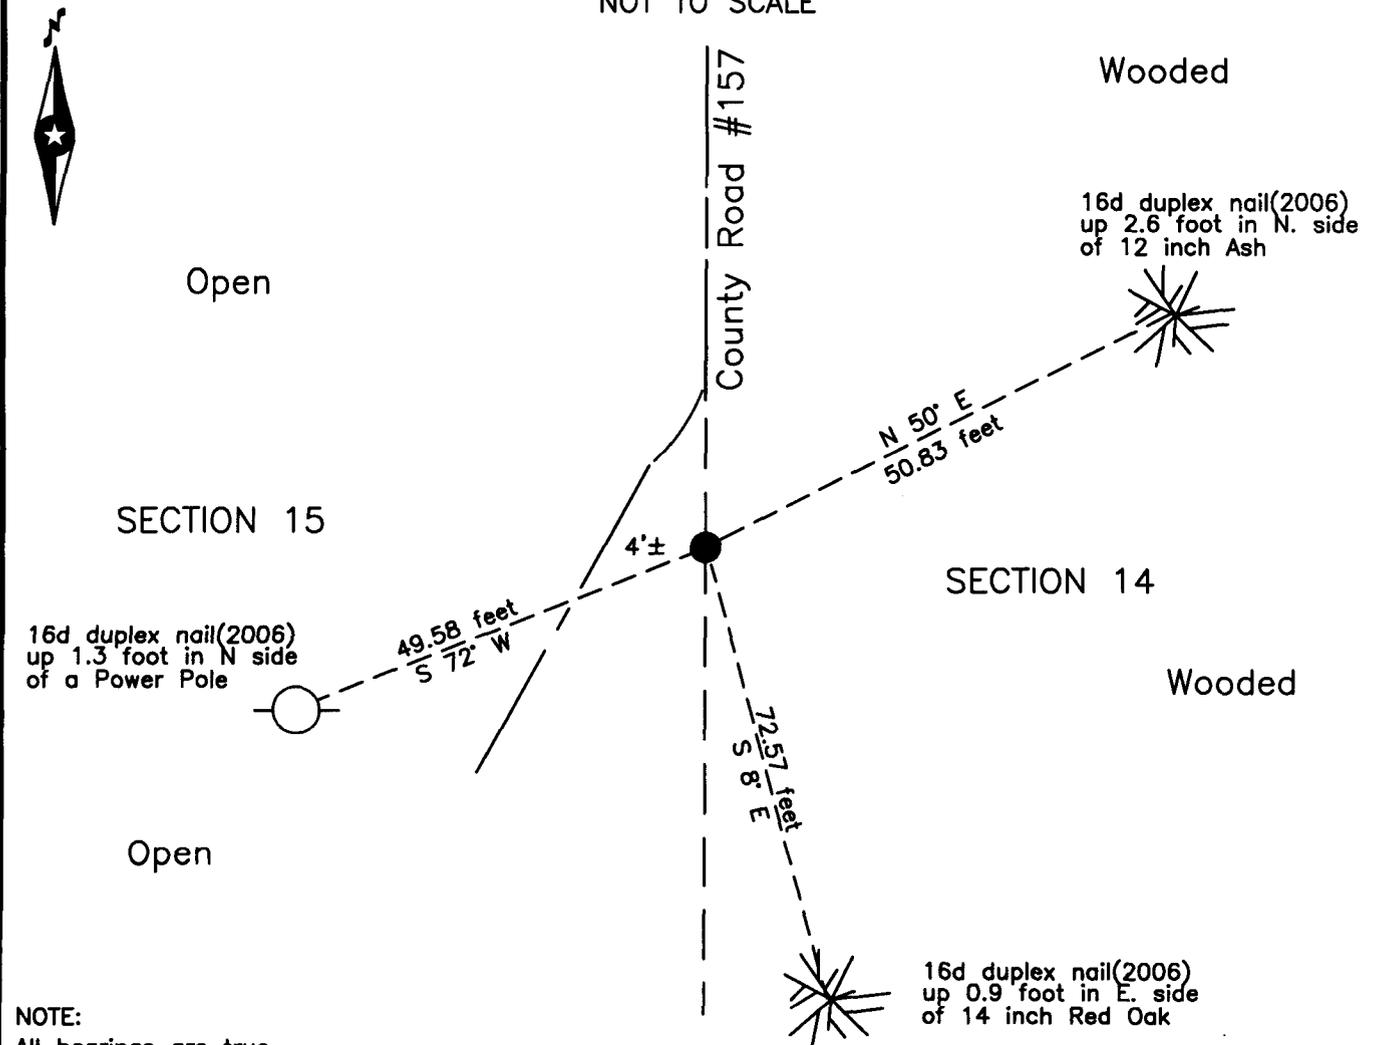

NOTE:
All bearings are true

Statement of evidence relative to this corner location is on the back of this page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman, Cass County Surveyor
Date 1/17/18 MN License No. 21367



**Index No. L.0-17.0**Statement of Evidence**East Quarter corner Section 15, Township 142 North, Range 28 West, 5th Principal Meridian.**

- Feb. 1874 P.H. Conger, General Land Office (GLO) Deputy Surveyor, in the notes of the subdivision of Township 142 North, Range 28 West, set a post for the original corner and referenced it as follows:
 6" Tamarac N 34° E 25 links (16.50 feet) 14" Tamarac N 76° W 37 links (24.42 feet)
 The above records are on file with the Minnesota Historical Society in St. Paul, Minnesota, copies are filed with the Cass County Highway Department, Surveyor's Office (CCHD/SO).
- Aug. 1919 E.B. Horst, LS 376, Deputy County Surveyor, Survey Record #435, Book C, page 343 and Ditch Shelf 5, Book 34, page 1, on file in the CCHD/SO, states 41834.4 ¼ S. cor. Bet. Secs. 14-15.
- June 1928 Hal D. Craig, General Land Office U. S. surveyor, states the ¼ sec. corner., which is marked by a cedar stake, 4 x 4 x 24 ins. In the ground. North and alongside of stake. Set an iron post, 3 feet long, 1 inch diameter, 26 inches in the ground, for the ¼ sec. corner, with brass cap and lists original witness as follows:
 15" Cedar N 47°45' E 17 links (11.22 feet) Blazed and signs of old scribe marks. This does not Agree with the original notes.
 New witnesses as follows:
 16" Birch S 63°30' E 41 links (27.06 feet) 10" Ash N 88°15' W 110 links (72.60 feet)
 The above records are on file with the Minnesota Historical Society, St. Paul, Minnesota, copies are filed with the CCHD/SO.
- April 2006 T.L. Freeman, LS 21367, Certificate of Survey and notes for Brent Zapzalka in Section 15, on file in the Walker office of Northern Engineering and Consulting (NECI) and the CCHD/SO, indicates the corner was set on the extension of the centerline of County Road #157 and witnessed as follows:
 12" Ash N 50° E 50.83 feet 15" Oak S 8° E 72.57 feet
 P. Pole S 72° W 49.58 feet
- May 2017 B. Hippen, technician, records of the CCHD/SO, found 7/8 inch outside diameter iron pipe, down 0.3 foot, 4 feet, more or less, east of centerline of County Road #157 and the 2006 witnesses all good.

The monument, recovered and established references for the position are shown on the face of this document.

Analysis of the recovered record data, field evidence and survey measurements, indicates that the monument recovered by the CCHD/SO in 2017 is the accepted location of this corner.

County Coordinates (Cass County North)

Northing 214962.62

Easting 503375.12