



A000643869

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2018 10:44:41 AM

AS DOC #: A000643869

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SF Dep TX#: 148821

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trotter

PATRICK A TROTTER

Date: 9-05-18 License No: 41002
RLS 41002

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO. _____

NORTHEAST Corner of Section 5, Township 136, Range 32, 5TH P.M.

On _____ found a _____

left monument as found, lowered monument, removed monument (explain)


On 7/25/18 placed a 1/2" x 18" IRON PIPE WITH PLASTIC CAP MARKED RLS 41002

FLUSH WITH GROUND

SKETCH OF REFERENCE TIES

Corner Index: **A.0-9.0**

Not to Scale

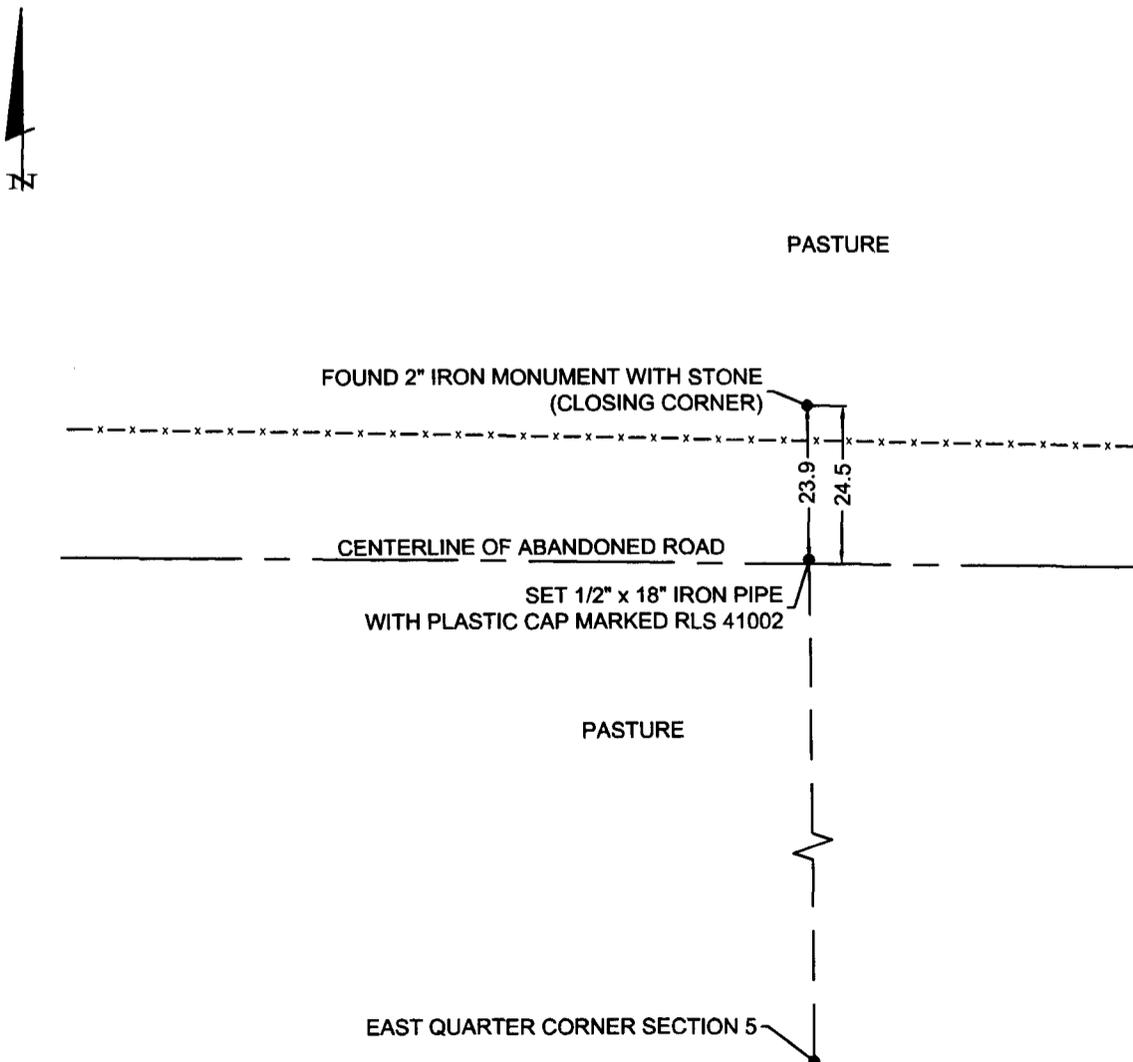

Statement of evidence for this corner position is on the back of this page

A.0-9.0Statement of Evidence**Northeast corner, Section 5, Township 136 North, Range 32
West, 5th Principal Meridian, Cass County, Minnesota**

- 1866 – Oscar Garrison, US Deputy Surveyor originally established the closing corner position while surveying the interior subdivision lines of Township 136 North, Range 32 West. A wood post was set to mark the corner position, no ties near to witness. Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).
- 1916 – E.B. Horst, County Surveyors Record Book B pages 542-544 and Curo Book 65 pages 22 and 60, found point of an old oak post for the closing corner, set an iron monument, and put up a stone mound. No ties near to witness. Also set an iron monument at the closing corner 23.9 feet south on township line. Information on file in the (CCHD/SO).
- 2018 – A Stonemark survey crew found a 2 inch iron monument with stone 24.5 feet north of centerline of old roadbed and 23.3 feet north of easterly extension of the north line of Section 5, T136N-R32W. Patrick Trottier PLS #41002, after analysis of record and survey information accepts this monument as closing corner set in 1916 by Horst. Set ½”x 18” iron pipe with plastic cap marked RLS 41002 23.9 feet south, on line between said 2” pipe and found East Quarter corner of Section 5 as perpetuation of the Northeast corner.

County Coordinates (Cass County North)

Northing	272865.9654
Easting	431464.7812