



A000643873

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2018 10:44:45 AM

AS DOC #: A000643873

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SF Dep TX#: 148821

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A TROTTIER

Date: 9-05-18 License No: 41002
RLS 41002

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ .M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO. _____

NORTHEAST Corner of Section 3, Township 136, Range 32, 5TH P.M.

On 7/25/18 found a BRIDGE SPIKE DOWN 0.3'


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: **A.0-17.0**

Not to Scale

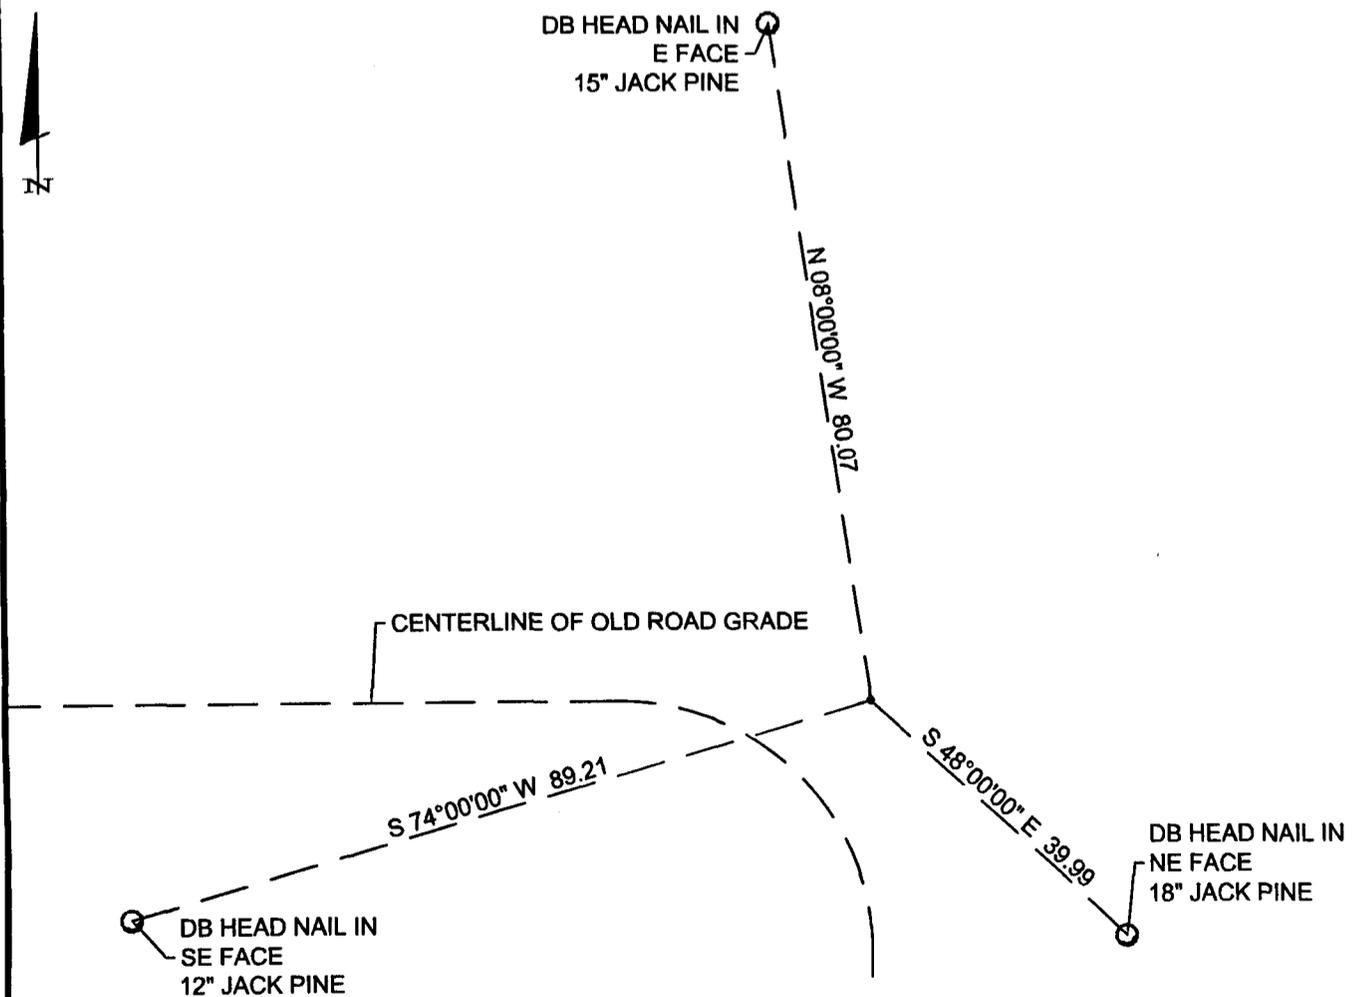

Statement of evidence for this corner position is on the back of this page

A.0-17.0Statement of Evidence**Northeast corner, Section 3, Township 136 North, Range 32
West, 5th Principal Meridian, Cass County, Minnesota**

1866 – Oscar Garrison, US Deputy Surveyor originally established the closing corner position while surveying the interior subdivision lines of Township 136 North, Range 32 West. A wood post was set to mark the corner position with the following witnesses:

6" Bl. Pine	S 30° E	9 links
5" Aspen	S 26° W	36 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1913 – John Curo, LS 1428, Cass County Surveyor, County Surveyors Record Book Number 236, Book A, page 595, found stump of old government bearing tree, 6" Bl Pine, S 30° E, 9 links. B. B. Bartlett set a stake, and N.W. Hicks set a stone, he added new bearing trees as follows:

14" J. Pine	S 35°26' W	73.03 feet
10" Spruce	N 29°27' W	85.54 feet
Fence Corner sits East 16.20 feet and North 0.40 feet		
Old Jack Pine	S 30° E	5.94 feet

Information on file in the (CCHD/SO).

1916 – February 1st, Final Road Order of Town Board, indicates a road on the south line of Township 137 North, Range 32 West, between the southeast corner of Sections 32 and 36 and states "And whereas, said road is wholly on a section line already surveyed we deem a survey of said road unnecessary.

Information on file in the (CCHD/SO).

1918 – J.F. Pomasel, LS 1728, Cass County Assistant Engineer, Survey Record Number 453, Book C, page 406, indicates "Wood Post" at station 1215+47.0 in S.R.H. 81.
Information on file in the (CCHD/SO).

1957 – Minnesota Department of Transportation (MN/DOT), S.P. 1109, Trunk Highway Number 64 right-of-way map indicates I.P. over Rock Mon. Inp. at the PI of the old road, 718.9 feet east of the centerline of the new alignment.
On file with the MN/DOT web site on sheet 15-56-014.

2003 – May 16th, B. Hippen, technician, found bridge spike down near the PI of old road grade and located it with the Global Positioning System.
Information on file in the (CCHD/SO).

2018 – A Stonemark survey crew found a bridge spike down 0.3', and is witnessed with the ties shown on the front of this certificate. Patrick Trottier PLS #41002, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

County Coordinates (Cass County North)

Northing 272854.1141

Easting 442092.4464