



A000643886

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2018 10:49:28 AM

AS DOC #: A000643886

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY NG Dep TX#: 148823

Page 1 of 2
A000643886

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A. TROTTIER

Date: 8-30-2018 License No: 41002
41002

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ .M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy
DOCUMENT NO.

NORTHEAST Corner of Section 31, Township 139, Range 26, 5th P.M.

On 5/9/2018 found a 2.5" IRON PIPE UP 0.3 FEET


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: **V.0-5.0**

Not to Scale

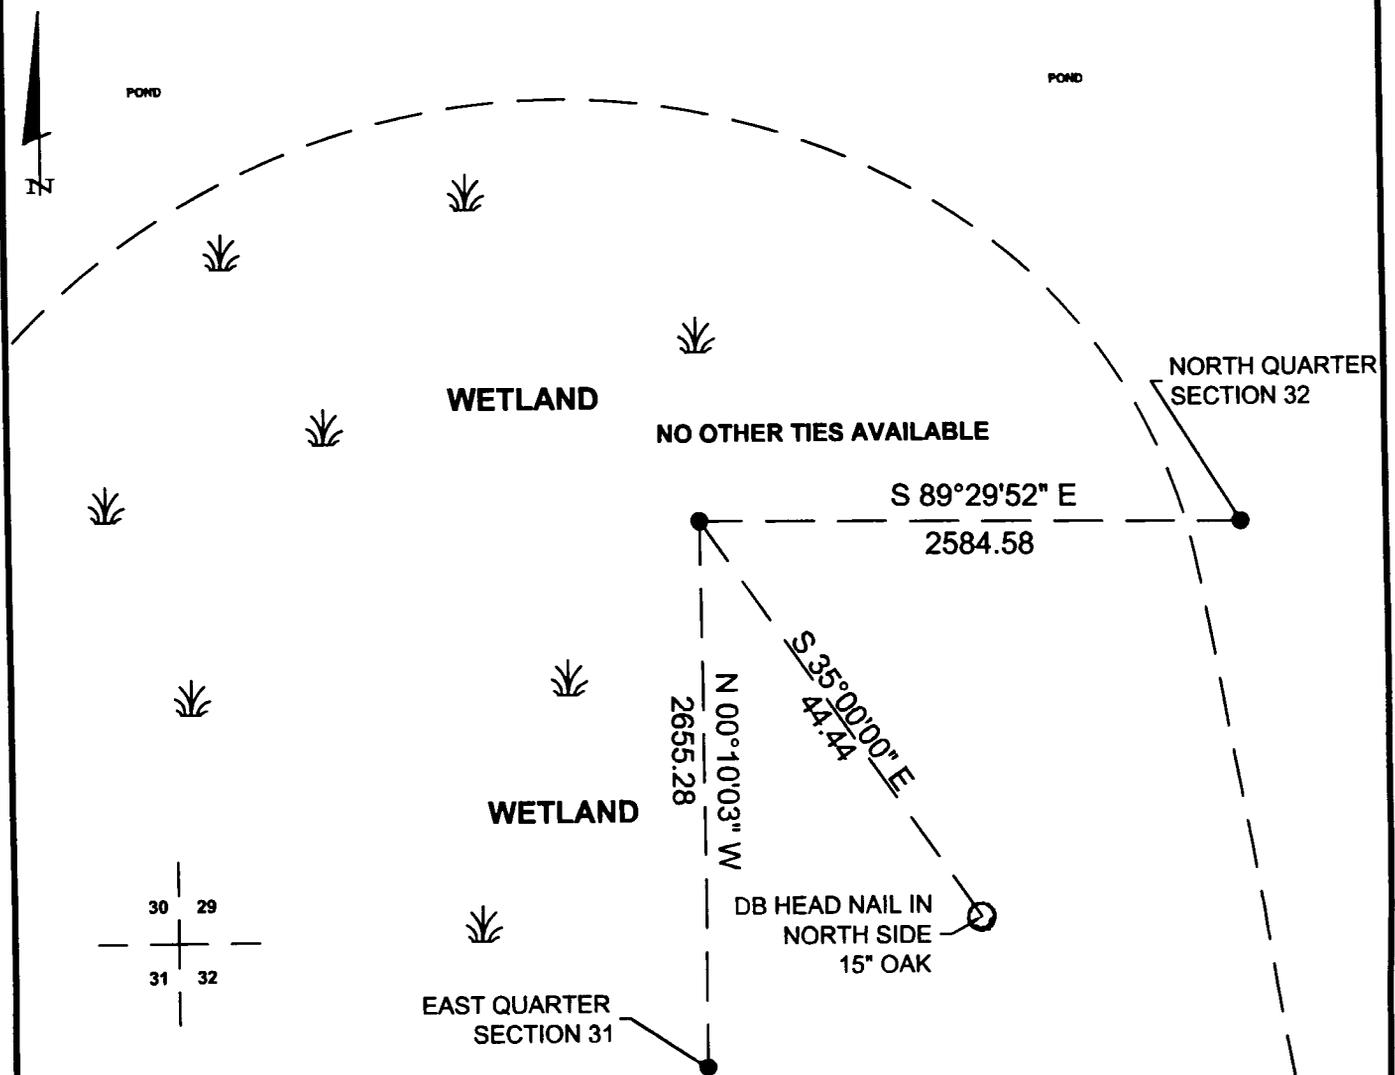

Statement of evidence for this corner position is on the back of this page



V.0-5.0

Statement of Evidence

**Northeast corner, Section 31, Township 139 North, Range 26
West, 5th Principal Meridian, Cass County, Minnesota**

1863 – Johnson and Thornton, US Deputy Surveyors originally established this corner position while surveying the interior subdivision lines of Township 139 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses:

- 24” W. Pine N 79° E 433 links
- 24” W. Pine S 27° E 273 links
- 20” W. Pine S 71° W 147 links
- 20” W. Pine N 40° W 97 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1916 – John Curo, County Book B, P186-190, found old Government bearing tree stumps. Set a 4x4x48” post, came back later and set a 2x48” iron boiler tube with the following witnesses:

- Grey Rock N 44°10’ E 46.60 feet
- Grey Rock N 21°10’ W 114 feet
- Red Rock S 67°40’ W 12.20 feet
- 10” W. Oak S 57°30’ E 234.60 feet

Information on file in the (CCHD/SO).

1937 – CCC, Washburn Lake Book 3, P34, at 80 chains from East, set stake for approximate corner, at 85 chains blazed trees.
Copies on file in the Washburn Lake Forestry Station.

1986– Wallace Buckler, LS 9672, map shows monument in place.

2018 –A Stonemark survey crew found a 2.5 inch iron pipe up 0.3 feet from the ground, and is witnessed with the tie shown on the front of this certificate. Patrick Trottier PLS #41002, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

County Coordinates (Cass County North)

Northing 105334.100
Easting 552032.740