



A000643890

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

9/6/2018 10:49:32 AM

AS DOC #: A000643890

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY NG Dep TX#: 148823

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Trotter*

PATRICK A. TROTTER

Date: 8-30-2018 License No: 41002  
41002

OFFICE OF THE COUNTY RECORDER  
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at \_\_\_\_\_ o'clock \_\_\_\_\_ .M. on the \_\_\_\_\_ day of \_\_\_\_\_, 20\_\_\_\_ A.D.

County Recorder \_\_\_\_\_

By: \_\_\_\_\_, Deputy  
DOCUMENT NO. \_\_\_\_\_

NORTHEAST Corner of Section 33, Township 139, Range 26, 5th P.M.

On 5/3/2018 found a FRAGMENT OF 2" IRON PIPE AND SHARDS OF PIPE BELOW  
ON CENTERLINE OF WOODS BAY DR NE 0.5' BELOW GRADE



left monument as found,  lowered monument,  removed monument (explain)

On 7/17/2018 placed a 1/2" IRON PIPE WITH PLASTIC CAP STAMPED RLS "41002" 0.5"  
BELOW GRADE

### SKETCH OF REFERENCE TIES

Corner Index: V.0-13.0

Not to Scale

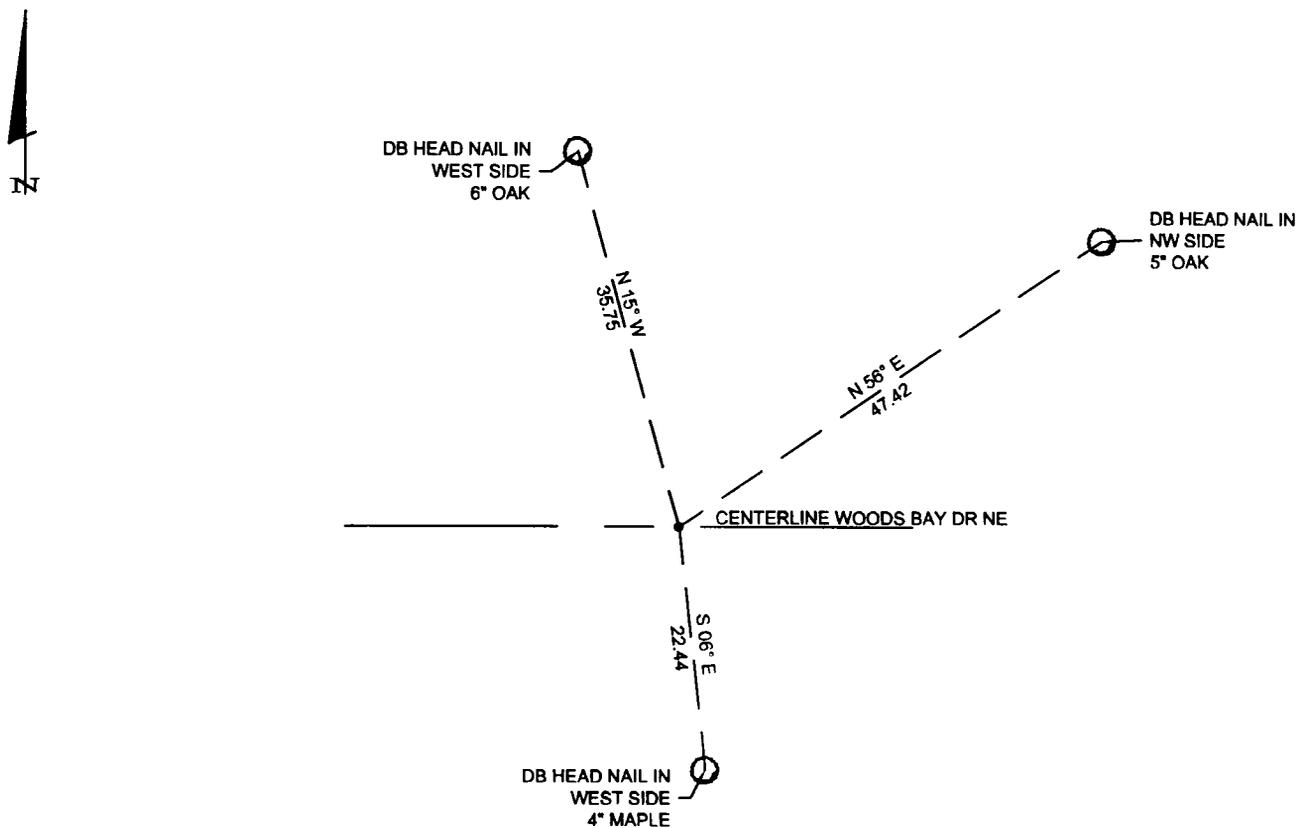

Statement of evidence for this corner position is on the back of this page



V.0-13.0

**Statement of Evidence**

**Northeast corner, Section 33, Township 139 North, Range 26  
West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1863 – Johnson and Thornton, US Deputy Surveyors originally established this corner position while surveying the interior subdivision lines of Township 139 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses:

20" W. Pine	N 25° E	37 links
20" W. Pine	S 22° E	48 links
16" W. Pine	S 58° W	22 links
15" W. Pine	N 28° W	62 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1916 – John Curo, County Book B, P187-190, found nothing, set a 2"x48" iron boiler tube proportionally.

Information on file in the (CCHD/SO).

1936 – CCC, Washburn Lake Book 3, P. 59, set a scribed fence post with yellow tag.  
Information on file in the Washburn Lake Forestry Station.

1936 – CCC, Washburn Lake Book 20, P. 40, shows corner is 100' north of road.  
Information on file in the Washburn Lake Forestry Station.

2018 –A Stonemark survey crew found a 2" inch broken off iron pipe down 0.4 feet below grade in centerline of gravel road, dug down two feet and found broken shards of pipe, a ½"x 18" iron pipe with plastic cap marked RLS 41002 was set 0.5' below grade, at broken off pipe position, and is witnessed with the ties shown on the front of this certificate. This position agrees within acceptable tolerance of a double proportion position, and John Curo's 1916 surveyed distances. Patrick Trottier PLS #41002, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

County Coordinates (Cass County North NAD83/96)

Northing      105313.960

Easting        562604.050