



A000643891

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/6/2018 10:49:33 AM

AS DOC #: A000643891

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY NG Dep TX#: 148823

Page 1 of 2 A000643891

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

PATRICK A. TROTTIER

Date: 8-30-2018 License No: 41002
41002

OFFICE OF THE COUNTY RECORDER
County of CASS

I hereby certify that this document was filed in the Office of the County Recorder at _____ o'clock _____ M. on the _____ day of _____, 20____ A.D.

County Recorder _____

By: _____, Deputy

DOCUMENT NO. _____

NORTH QUARTER Corner of Section 34, Township 139, Range 26, 5th P.M.

On 5/3/2018 found a BENT 2" IRON PIPE


left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

SKETCH OF REFERENCE TIES

Corner Index: V.0-15.0

Not to Scale

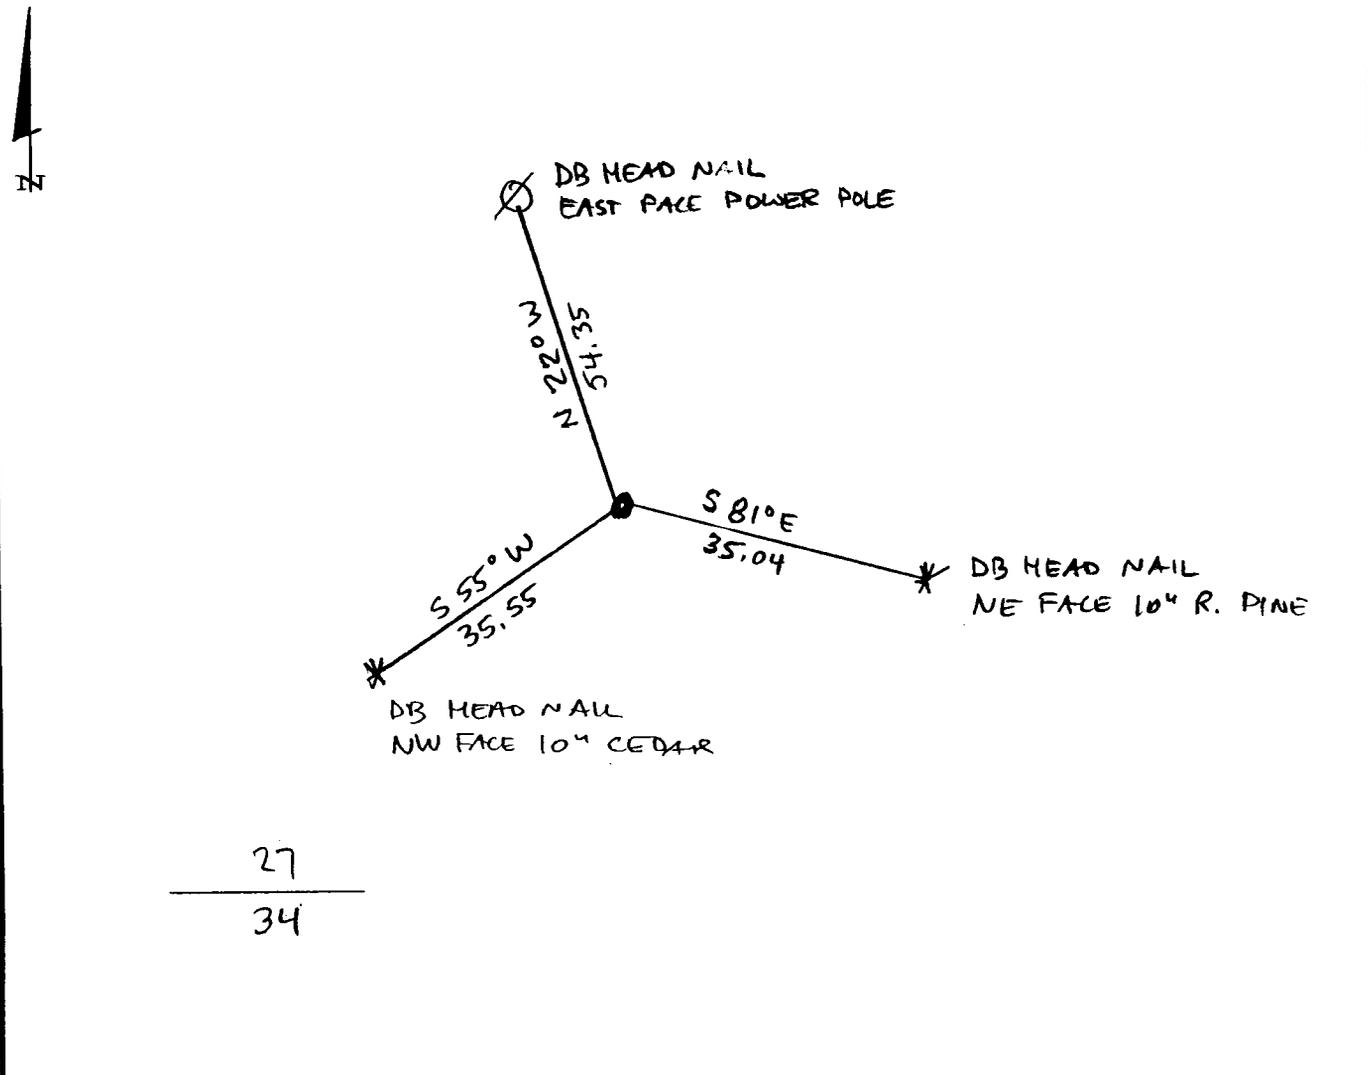

27

34

Statement of evidence for this corner position is on the back of this page



V.0-15.0

Statement of Evidence

**North Quarter corner, Section 34, Township 139 North, Range 26
West, 5th Principal Meridian, Cass County, Minnesota**

1863 – Johnson and Thornton, US Deputy Surveyors originally established this corner position while surveying the interior subdivision lines of Township 139 North, Range 26 West. A wood post was set to mark the corner position with the following witnesses:

26" W. Pine N 35° W 18 links
22" W. Pine S 65° W 66 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1916 – John Curo, County Book B, P186-190, found stumps of old Government bearing trees. Set a 2x48" iron boiler tube.
Information on file in the (CCHD/SO).

1947 – Louis Knudson, LS 940, plat of Roosevelt Shores, shows monument in place.
Information on file in the CCRO Doc#129001.

1986 – Wallace Buckler, LS 9672, map shows monument in place.

2004 – Patrick Trottier, RLS 41002, certificate of survey shows monument found in place.

2018 – A Stonemark survey crew found a 2 inch bent iron pipe 0.2 feet above ground, measured at plumb position, and is witnessed with the ties shown on the front of this certificate. Patrick Trottier PLS #41002, after analysis of record and survey information accepts this monument as the correct perpetuation of the corner.

County Coordinates (Cass County North NAD83/96)

Northing 105302.623
Easting 565228.325