



A000646711

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

12/17/2018 10:23:00 AM

AS DOC #: A000646711

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 151021

### CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

*Patrick A. Trotter*

Patrick A. Trotter

Date: 12-13-2018 License No: 41002  
PLS# 41002

North Quarter Corner of Section 28, Township 136N, Range 32W, 5<sup>th</sup> P.M.


- On 11-29-18 found a 1/2" iron pipe with cap "17768" flush with ground, 25' west of N-S fence and 3' north of E-W fence
  - left monument as found,
  - lowered monument,
  - removed monument (explain)
- On \_\_\_\_\_ placed a \_\_\_\_\_

### SKETCH OF REFERENCE TIES

Not to Scale

Corner Index:

R.0-11.0

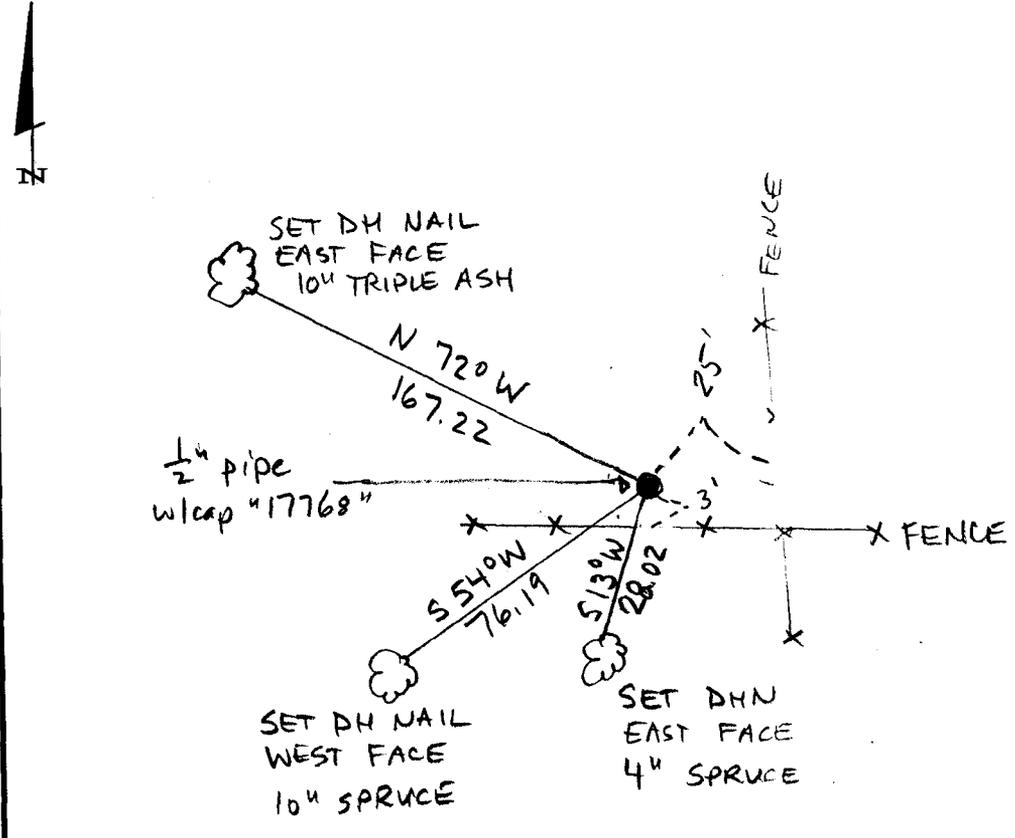



**R.0-11.0**

**Statement of Evidence**

**North Quarter corner, Section 28, Township 136 North, Range 32  
West, 5<sup>th</sup> Principal Meridian, Cass County, Minnesota**

1866 - Oscar E. Garrison, US Deputy Surveyor originally established this corner position while surveying the interior subdivision lines of Township 136 North, Range 32 West. A wood post was set to mark the corner position with the following witnesses:

5" W. Pine S 41 1/2° W 9 links

8" W. Pine N 30° W 11 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1918 – E.B. Horst, LS 376, in County Book C, p. 109, and Curo Book 65, p. 73', set a 2" x 48" iron monument proportionally with the following witnesses:

6" Poplar N 60° W 54.5 feet

8" Poplar S 45° W 41.2 feet

Information on file in the CCHD/SO.

1926 – J.M. Greene, in County Book D, p. 171, found iron monument.

Information on file in the CCHD/SO.

2018 – Patrick Trottier, PLS 41002 finds 1/2" iron pipe with cap "17768", flush with ground, 25 feet west of N-S fence and 3' north of E-W fence.

After analysis of record and survey information accepts this monument as the perpetuation of the corner and establishes the witnesses as shown on the face of this drawing.

County Coordinates (Cass County South NAD83/96)

Northing 251725.78

Easting 434107.77

6