



A000653989

OFFICE OF THE COUNTY RECORDER
 CASS COUNTY, MINNESOTA
 CERTIFIED, FILED, AND/OR
 RECORDED ON

10/3/2019 1:58:57 PM

AS DOC #: A000653989

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
 CASS COUNTY RECORDER

BY NG Dep TX#: 156876

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

Patrick A. Trottier

Patrick A. Trottier

Date: 9-25-2019 License No: 41002

PLS# 41002

Southeast Corner of Section 33, Township 137 N, Range 31 W, 5th P.M.


- On _____ found a _____
- left monument as found, lowered monument, removed monument (explain)
- On 8-20-19 placed a 1/2" x 3/8" iron pipe with plastic cap stamped "RLS 41002", up 0.4

SKETCH OF REFERENCE TIES

Corner Index:

Z.0-13.0

Not to Scale

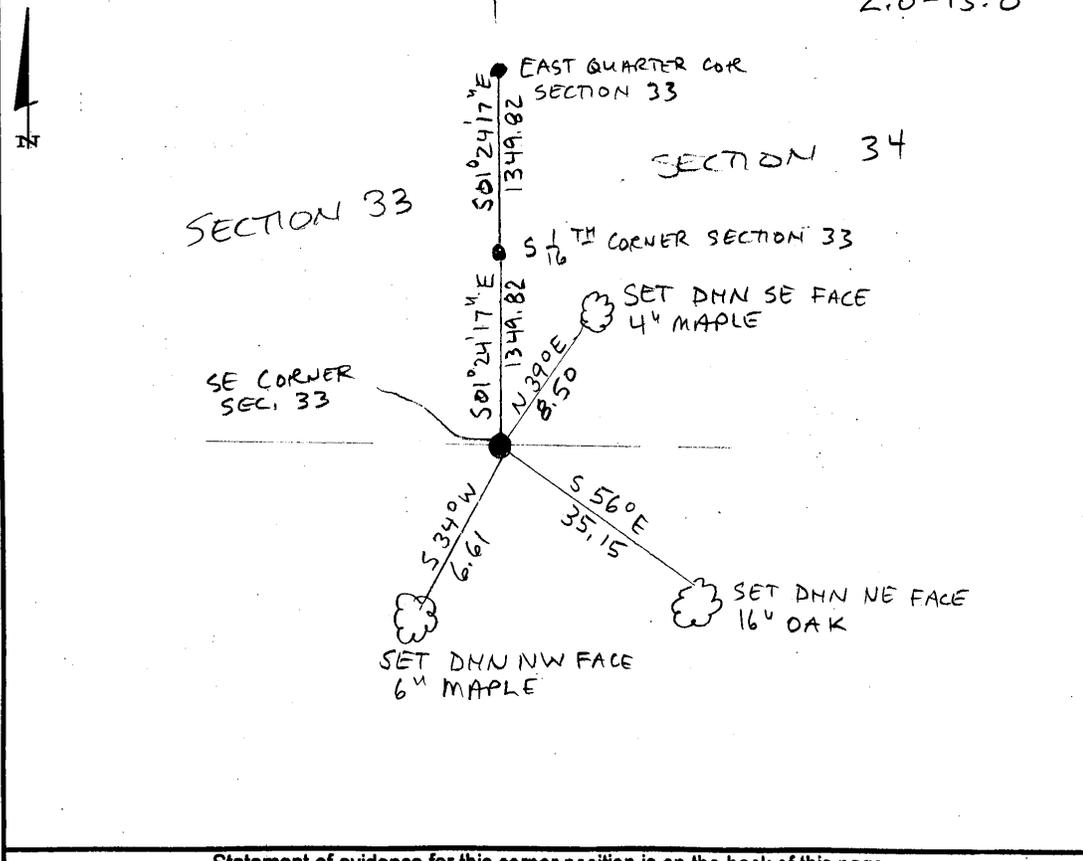



Z.0-13.0

Statement of Evidence

**Southeast corner, Section 33, Township 137 North, Range 31
West, 5th Principal Meridian, Cass County, Minnesota**

1858 – E.D. Atwater, General Land Office (GLO) Surveyor originally established this corner position while surveying south township line of Township 137 North, Range 31 West. A wood post was set to mark the corner position with the following witnesses:

- 6" Aspen N 80 1/2° E 35 links
- 4" Aspen N 67 1/4 ° W 50 links

Information on file in the MN Historical Society, St. Paul, MN. Copies on file in the Cass County Highway Department/Surveyors Office (CCHD/SO).

1905 – R. W. Hallett, Township road order shows survey.

Information on file in the (CCHD/SO). Information on file in the CCHD/SO.

1909 – A. W. Moulster, County Surveyors Record Book A pages 456-464, (also Curo Bk. 50, p. 105) references corner position and established the following witness:

- 3" Birch S 87° 54' E 31.60 feet
- 3" Birch S 2° 08' W 44.49 feet

Information on file in the (CCHD/SO). Information on file in the CCHD/SO.

1911 – A. W. Moulster, County Surveyors Record Book B pages 162-165, (also Curo Bk. 50, p. 105) found the 1909 S.E. ties , from which he set 3" x 3" x 16" birch stake and established the following witness:

- 4" W. Birch S 51°15' E 58.35 feet.

Information on file in the CCHD/SO.

1920 – Lincoln Mackey, County Surveyors Record Book C page 356, set a 2 1/2" x 30" iron monument. See County Re-Survey in cabinet E-46 in Cass County Recorder's Office. Information on file in the CCHD/SO.

2019 – Patrick A. Trottier, RLS 41002 finds no evidence at corner position. Established position by doubling distance and direction between found East quarter corner and S 1/16th corner on east line of Section 33 . Sets 1/2" x 36" iron pipe with plastic cap stamped "RLS 41002" as the perpetuation of the corner and establishes the witnesses as shown on the face of this drawing.

County Coordinates (Cass County South NAD83/96)
Northing 272988.05
Easting 467123.41