



A000655869

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

12/5/2019 10:21:17 AM

AS DOC #: A000655869

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SF Dep TX#: 158387

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 31, Township 145 N, Range 29 W, 5th P.M.
County of Cass, State of Minnesota


At the corner location shown on the sketch :

On _____ found _____

left monument as found lowered monument removed monument (explain)

On 10/24/2019 set 2" x 60" concrete filled iron pipe, with flared end,
and capped with a bronze tablet, stamped as shown, top 10" above ground

SKETCH OF REFERENCE TIES (NOT TO SCALE)

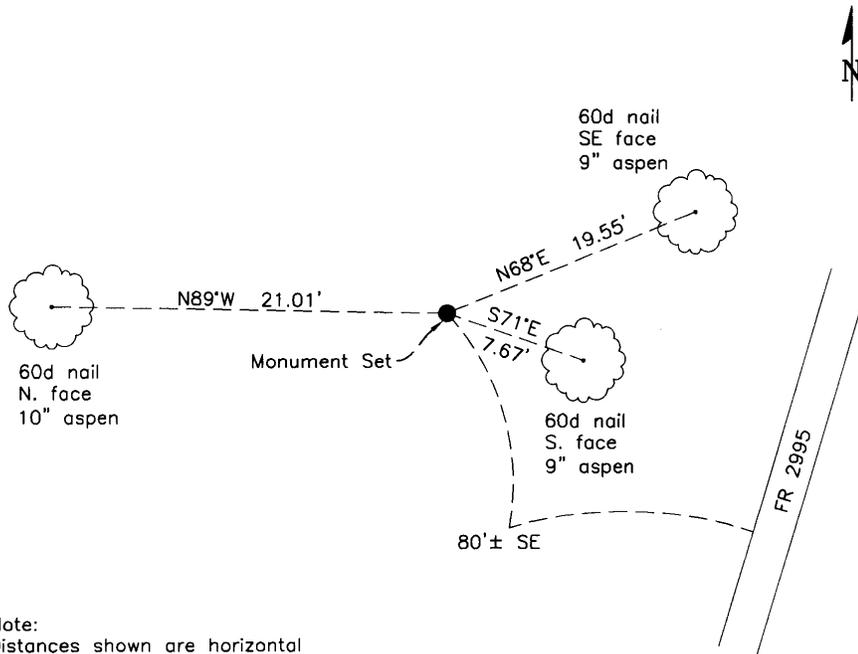


Note:
Distances shown are horizontal
Bearings shown are geodetic

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the state of Minnesota.

Aaron J. Skattum
MN License No. 54139

12-2-2019
Date



Cap Stamping Detail

Corner Index No. V.0-5.0
GCDB ID No. 200200

Cass County Coordinates
North Zone, NAD83(2011)
N: 295,277.919
E: 455,697.167



Corner Index No. V.0-5.0

STATEMENT OF EVIDENCE

Northeast Corner of Sec. 31, T.145N., R.29W., 5th P.M., Cass County, MN

- 1874 P.H. Conger, US General Land Office, originally established this corner while surveying the subdivision lines of this township, and set wood post to mark the corner position with the following witnesses:

20" Yellow Pine	N56°E	20 links (13.20')
24" Yellow Pine	S80°E	76 links (50.16')
5" Aspen	S30°W	50 links (33.00')
4" Aspen	N37°W	48 links (31.68')

Information on file at the MN Historical Society, St. Paul, MN. Copies filed with the Cass County Highway Department/Surveyor's Office (CCHD/SO).

- 1935 L. Henry, CCC Party Chief, (CCC Book 107, p. 4, USFS records) set a temporary stake at this location by running a distance-distance intersection from corners west and south, but did not mention finding any evidence of the original monument.

US Forest Service (USFS) records cited herein are on file at the Chippewa National Forest Supervisor's Office, Cass Lake, MN.

- 2019 A. Skattum, U.S. Forest Service, (Land Line Book 31, Page 57, USFS Records) found the remains of several red pine stumps, burnt and badly decayed. None of these remains could be identified as the original bearing trees, and none matched the layout of the original bearing tree ties. No evidence of subsequent surveys was found.

This corner was therefore determined to be lost, and restored using the 3-point control method from corners north, south, and west due to the lack of existent corners east of this position. New ties were made as follows:

10" Aspen	N89°W	21.01'	New BT
9" Aspen	S71°E	7.67'	New BT
9" Aspen	N68°E	19.55'	New BT
Steel signpost	South	2.5'±	Sign 54-9 attached

The following organizations were contacted for info on this corner:

MNDOT
MNDNR
KLJ
Cass County
Leech Lake Band of Ojibwe
U.S. Bureau of Land Management
Survey Mapping Solutions
Northern Engineering & Consulting, Inc.