



A000668740

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

1/28/2021 10:33:21 AM

AS DOC #: A000668740

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY SF Dep TX#: 168663


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 5, Township 145 N, Range 29 W, 5th P.M.
County of Cass, State of Minnesota

At the corner location shown on the sketch :

- On 05/06/2020 found 6" concrete cylinder with brass cap, marked as shown in 1934 GLO field notes, its top 2" below the ground, leaning slightly north
- left monument as found lowered monument removed monument (explain)
- On _____ set _____

SKETCH OF REFERENCE TIES (NOT TO SCALE)

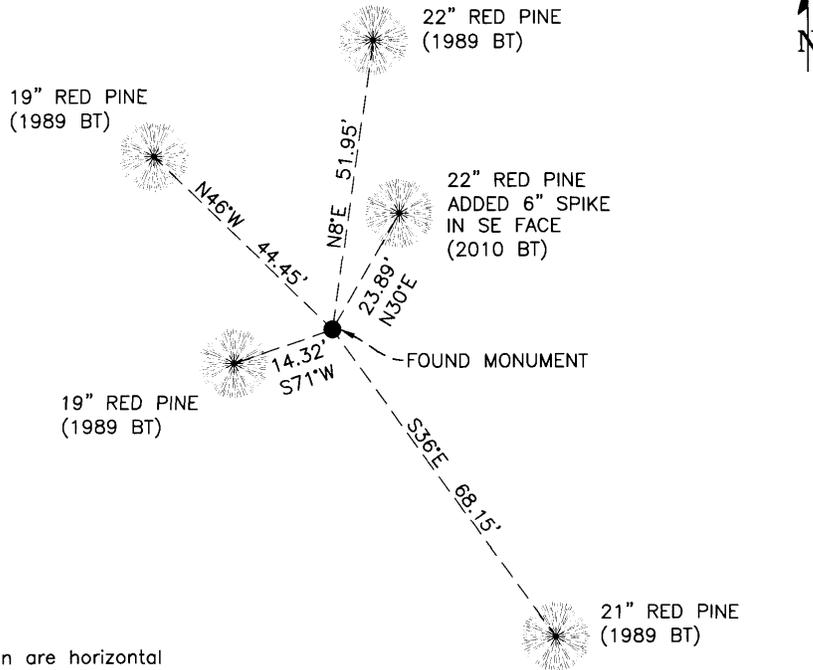

Note:
Distances shown are horizontal
Bearings shown are geodetic

Sheet 1 of 2

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the state of Minnesota.

Aaron J. Skattum
Aaron J. Skattum
MN License No. 54139

12-28-2020
Date

Corner Index No. A.0-9.0
GCDB ID No. 300700

Cass County Coordinates
North Zone, NAD83(2011)
N: 322,617.790
E: 461,313.691





Corner Index No. A.0-9.0

STATEMENT OF EVIDENCE

Northeast Corner of Sec. 5, T.145N., R.29W., 5th P.M., Cass County, MN

1873 P.H. Conger, US General Land Office, originally established this corner while surveying the north line of the township, and set wood post to mark the corner position with the following witnesses:

| | | |
|---------------|-------|---------------------|
| 10" Jack pine | N14°W | 40 links (26.4') |
| 12" Jack pine | S78°W | 283 links (186.78') |
| 12" Jack pine | N40°E | 48 links (31.68') |
| 18" Jack pine | S75°E | 35 links (23.10') |

Information on file at the MN Historical Society, St. Paul, MN. Copies filed with the Cass County Highway Department/Surveyor's Office (CCHD/SO).

1934 H.D. Craig, US General Land Office, during a dependent resurvey of the north line of this township, found no evidence of the original monument and set a 6"x24" cylindrical concrete monument with brass cap at proportionate distance, noting the following ties:

| | | | |
|--------------|----------|---------------------|--------|
| 8" Jack pine | S51.25°E | 498 links (328.68') | New BT |
| 4" Jack pine | S42.25°E | 669 links (441.54') | New BT |

Information on file at the CCHD/SO.

1989 K. Krause & G. Brama, US Forest Service, (Corner Book 1, page 7, USFS Records) found the GLO concrete monument and noted the following ties:

| | | | |
|----------------|----------|---------|--------------------------------|
| 8" Jack pine | S51.25°E | 328.68' | 1934 BT, not found |
| 4" Jack pine | S42.25°E | 441.54' | 1934 BT, found snag |
| 15" Red pine | N8°E | 51.95 | New BT |
| 15" Red pine | S36°E | 68.15' | New BT |
| 10" Red pine | S71°W | 14.32' | New BT |
| 12" Red pine | N46°W | 44.45' | New BT |
| Steel signpost | North | 3.0' | New 8' long steel signpost set |

2020 A. Skattum, US Forest Service, (Land Lines Book 30, page 77, USFS Records) found the GLO concrete monument, 2" below ground, leaning slightly north. The monument's movement may have been intentional or by natural causes. The center of the brass cap was used as the corner position, from which the following ties were measured:

| | | | |
|----------------|-------|--------|---|
| 22" Red pine | N8°E | 51.95 | 1989 BT, good condition |
| 21" Red pine | S36°E | 68.15' | 1989 BT, good condition |
| 19" Red pine | S71°W | 14.32' | 1989 BT, good condition |
| 19" Red pine | N46°W | 44.45' | 1989 BT, good condition |
| Steel signpost | North | 3.0' | 1989 signpost in place |
| 13" Red pine | N30°E | 23.89' | 2010 BT, tag by "DRJ" dated 10/10, origin unknown. Added spike in SE face for distance measurement. |

US Forest Service records cited above are on file at the Chippewa National Forest Supervisor's Office, Cass Lake, MN.