



A000670650

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

3/26/2021 12:33:03 PM

AS DOC #: A000670650

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY NG Dep TX#: 170246

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA
CONTAINED HEREIN WAS PREPARED BY ME OR UNDER
MY DIRECT SUPERVISION.

Kathy T. Carlson 3/25/2021
KATHY T CARLSON DATE

LICENSE NO. 40991

- LAND SURVEYOR PROFESSIONAL ENGINEER
- COUNTY SURVEYOR COUNTY ENGINEER

NAD 1983 (1996 HARN) CASS COUNTY NORTH ZONE COORDINATES
N= 328012.586 E= 453438.184 US SURVEY FT
(COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. V-03, QUARTER CORNER OF SECTIONS 30 & 31, TOWNSHIP 146, RANGE 29, 5TH P.M.
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:


- ON 1/28/2021 FOUND A(N) STAMPED BRASS CAP ATTACHED TO A 2" IRON PIPE.
- LEFT MONUMENT AS FOUND, LOWERED MONUMENT, REMOVED MONUMENT (EXPLAIN)
- ON _____ DATE _____ PLACED A(N) _____

SKETCH OF REFERENCE TIES

DECLINATION 0°
SKETCH NOT TO SCALE

T146-R29-S30

MONUMENT MARKED:

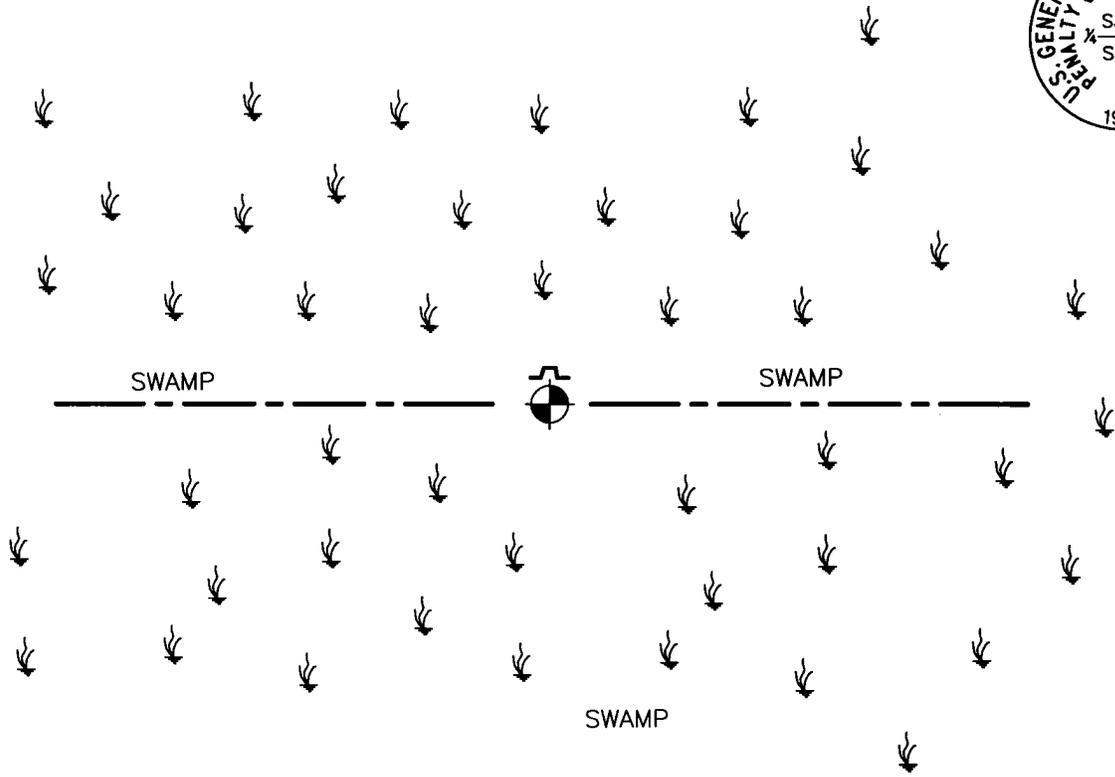

T146-R29-S31

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE

Page 1 of 2
A000670650



STATEMENT OF EVIDENCE: Quarter Corner of Sections 30 & 31, Township 146 North, Range 29 West, of the 5th Principal Meridian.

1875; This corner was originally established by B.C. Baldwin, Deputy Surveyor under contract to the General Land Office (GLO), now the Bureau of Land Management (BLM). A copy of the plat of this township and hand copied field notes are available on the BLM website. These Field notes indicate a wood post was set to mark this corner position, which was witnessed by:

Tamarack,	5",	South 26° East,	2.56 chains,	168.96 feet;
Tamarack,	4",	East,	6.63 chains,	437.58 feet:

1934; (June) A Dependent Resurvey of T146N-R29W was performed by Cadastral Surveyor Hal D. Craig of the BLM. Mr. Craig failed to find any evidence of the 1875 corner position. He set a brass capped monument affixed to a 2" by 36" iron pipe. Mr. Craig notes that there are no trees available for marking. As an accessory to the corner position, he set a 6" square Tamarack post, 7' long alongside the iron pipe.

2021; (January) Itasca County Department of Surveying and Mapping personnel C. Hendershott and T. Lasecki recovered the 1933 monument lying flat in an open swamp. The monument was chopped out of the ice and the monument was plumbed at the location of where the base of the monument was recovered. Geodetic coordinates were established on the monument using a VRS RTK observation. This information is found in the Itasca County 146-29 Field Book 2, page 40. There are no trees in the immediate vicinity to use as witnesses.

The monument concurs with the position as established using proportionate methods and as set in 1934.