

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA CONTAINED HEREIN WAS PREPARED BY ME OR UNDER MY DIRECT SUPERVISION.

Mary T. Carlson 2/25/2021
GUY T CARLSON DATE

LICENSE NO. 40991

- LAND SURVEYOR
- PROFESSIONAL ENGINEER
- COUNTY SURVEYOR
- COUNTY ENGINEER

NAD 1983 (1996 HARN) CASS COUNTY NORTH ZONE COORDINATES
N= 327916.123 E= 458722.325 US SURVEY FT
(COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)



A000670651

**OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON**

3/26/2021 12:33:04 PM

AS DOC #: A000670651

PAGES: 2

REC FEES: 0.00

**KATHRYN M. NORBY
CASS COUNTY RECORDER**

BY NG Dep TX#: 170246

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. V-07, QUARTER CORNER OF SECTIONS 29 & 32, TOWNSHIP 146, RANGE 29, 5TH P.M.
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON 1/29/2021 FOUND A(N) STAMPED BRASS CAP ATTACHED TO A 2" IRON PIPE.
- LEFT MONUMENT AS FOUND, LOWERED MONUMENT, REMOVED MONUMENT (EXPLAIN)
- ON _____ DATE PLACED A(N) _____


SKETCH OF REFERENCE TIES

DECLINATION 0°
SKETCH NOT TO SCALE

MONUMENT MARKED:



T146-R29-S29

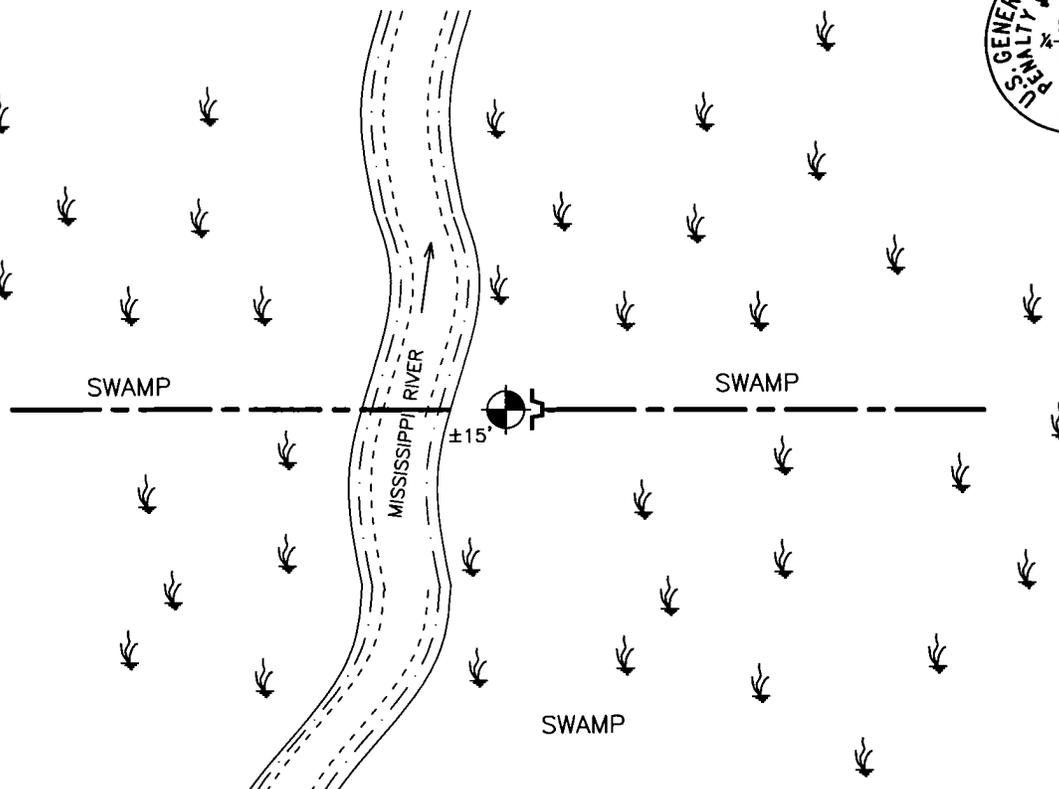

T146-R29-S32

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE



STATEMENT OF EVIDENCE: Quarter Corner of Sections 29 & 32, Township 146 North, Range 29 West, of the 5th Principal Meridian.

1875; This corner was originally established by B.C. Baldwin, Deputy Surveyor under contract to the General Land Office (GLO), now the Bureau of Land Management (BLM). A copy of the plat of this township and hand copied field notes are available on the BLM website. These Field notes indicate a wood post was set to mark this corner position, which was witnessed by:

Jack Pine,	8",	North 87° East,	2.54 chains,	167.64 feet;
Jack Pine,	12",	South 41° West,	1.40 chains,	92.40 feet:

1903; (January) A portion of a survey for the Lake Winnibigoshish Reservoir was performed by Mr. C.H. Ford of the United States Army Corps of Engineers (USACE). Mr. Ford recovered the 1875 witness trees, noting that they were both dead and down. This information is found in USACE Field Book A1-319, page 52. No additional witnesses were added to this position.

1934; (June) A Dependent Resurvey of T146N-R29W was performed by Cadastral Surveyor Hal D. Craig of the BLM. Mr. Craig recovered the fallen remains of the 1875 witness to the northeast. He set a brass capped monument affixed to a 2" by 36" iron pipe to mark this recovered position. He established the following witnesses:

Jack Pine,	5",	North 40 3/4° East,	516 links,	340.56 feet;
Jack Pine,	8",	South 2½° East,	209 links,	137.94 feet:

2021; (January) Itasca County Department of Surveying and Mapping personnel C. Hendershott and T. Lasecki recovered the 1933 monument leaning at a 45° angle in an open swamp. The monument was chopped free of snow and ice, plumbed and driven into the swamp. No attempt was made to recover the 1934 witnesses. Geodetic coordinates were established on the monument using a Fast Static observation. This information is found in the Itasca County 146-29 Field Book 2, page 42. There were no trees in the vicinity to use for witnesses.

The chain of history indicates that this position is a direct perpetuation of the corner as established in 1875.