



A000676168

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

8/27/2021 11:46:55 AM

AS DOC #: A000676168

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 174777

I HEREBY CERTIFY THAT THIS DOCUMENT AND THE DATA  
CONTAINED HEREIN WAS PREPARED BY ME OR UNDER  
MY DIRECT SUPERVISION.

Guy T. Carlson  
GUY T CARLSON

8/20/2021  
DATE

LICENSE NO. 40991

- LAND SURVEYOR       PROFESSIONAL ENGINEER
- COUNTY SURVEYOR     COUNTY ENGINEER

NAD 1983 (1996 HARN) CASS COUNTY NORTH ZONE COORDINATES  
N= 279562.702 E= 601920.276 US SURVEY FT  
(COORDINATES ARE SHOWN AS INFORMATION ONLY, SUBJECT TO VERIFICATION)

## CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDEX NO. J-19, NORTH QUARTER CORNER OF SECTION 14, TOWNSHIP 144, RANGE 25, 5TH P.M.  
STATE OF MINNESOTA, COUNTY OF CASS

AT THE CORNER LOCATION SHOWN ON THE SKETCH:

- ON 7/09/2021 FOUND A(N) UNITED STATES FOREST SERVICE, ALUMINUM CAPPED, ALUMINUM ROD MONUMENT.
- LEFT MONUMENT AS FOUND,       LOWERED MONUMENT,       REMOVED MONUMENT (EXPLAIN)
- ON \_\_\_\_\_ PLACED A(N) \_\_\_\_\_

### SKETCH OF REFERENCE TIES

MONUMENT MARKED:




DECLINATION 0°  
SKETCH NOT TO SCALE



T144-R25-S11

SWAMP

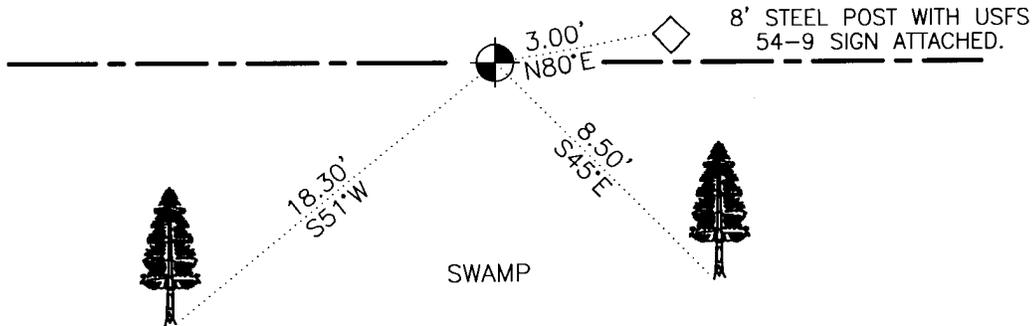

??" ????? WITH DOUBLE  
BLAZE AND 10d NAIL AND  
DISC IN ???? BASE

T144-R25-S14

STATEMENT OF EVIDENCE RELATIVE TO THIS CORNER LOCATION IS ON BACK OF PAGE



**STATEMENT OF EVIDENCE:** Quarter Corner of Sections 11 and 14, Township 144 North,  
Range 25 West, of the 5th Principal Meridian.

1876; This corner was originally established by B.C. Baldwin, Deputy Surveyor under contract to the General Land Office (GLO), now the Bureau of Land Management (BLM). A copy of the plat of this township and hand copied field notes are on file in the Itasca County Surveyor's Office. These Field notes indicate a wood post was set to mark this corner position, which was witnessed by:

Tamarack,	5",	South 36° East,	38 links,	25.08 feet;
Tamarack,	5",	North 28° West,	32 links,	21.12 feet:

1900; (February) W.R. Caldwell of the United States Corps of Engineers (USACE) "found both bearing trees standing with marks plain." He proceeded to tie this corner position into his stadia traverse. Field Book A1-223, page 14.

1985; (January) James Parker, LS 9235, of Advance Surveying performed a Dependent Resurvey of this Township. He failed to find any evidence of this corner position. He set a 5/8" by 10' long aluminum rod with a 3" stamped aluminum cap at an obliterated position using the USACE information. He filed a Certificate of Location of Government Corner with the Cass County Recorder. See Document #281712. This corner position was witnessed by:

Spruce,	4",	South 45° West,	16.23 feet;
Tamarack,	4",	North 20° West,	13.40 feet:

2021; (July) Itasca County Department of Surveying and Mapping personnel T. Lasecki and W. Storm recovered the monument as set in 1985 up 17" and bent. They attempted to straighten the monument and then it was driven flush with the ground and geodetic coordinates were collected on the monument. They note the 1985 witness to the northwest is down and the 1985 witness to the southwest is dead standing. Township 144-25 Township Field Book 1, page 31. The recovered and established witnesses are as shown on the face of this document.

