



A000683290

OFFICE OF THE COUNTY RECORDER  
CASS COUNTY, MINNESOTA  
CERTIFIED, FILED, AND/OR  
RECORDED ON

4/12/2022 12:16:38 PM

AS DOC #: A000683290

PAGES: 2

REC FEES: 0.00

KATHRYN M. NORBY  
CASS COUNTY RECORDER

BY KF Dep TX#: 180547

Page 1 of 2 A000683290

Index No. N-5

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 19, Township 145N, Range 27W  
5th Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

■ On 2/23/2021 found a NO ORIGINAL EVIDENCE  
DATE

■ left monument as found,  lowered monument,  removed monument (explain)

■ On 12/21/2021 Placed a 3/4" X 24" REBAR WITH CAP STAMPED "MN DNR LS 48249"  
DATE  
FLUSH, +/- 52 FEET NORTH OF SW-NE RUNNING HIGHWAY

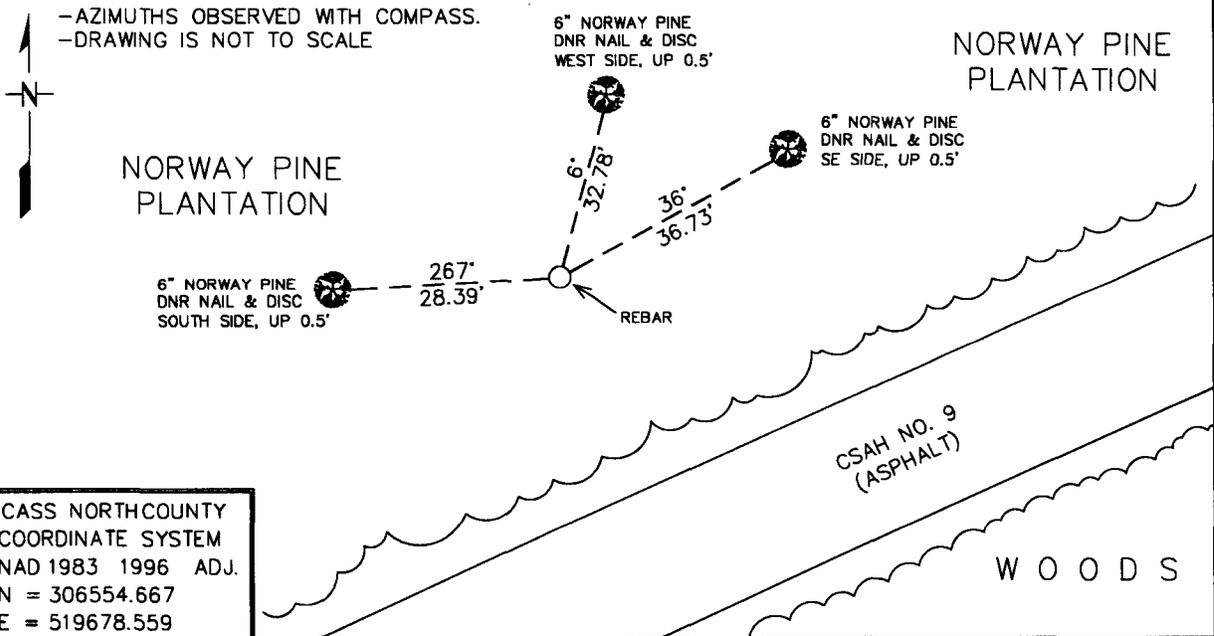

Statement of evidence for this corner location is on back of this page.

AMD 1/25/2022  
GNA00002.00.00.01

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

SIGNATURE Daniel A. Drusch DATE 3-31-2022 License Number 48249  
DANIEL A. DRUSCH

Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer

**Northeast Corner Section 19, Township 145 North, Range 27 West, 5<sup>th</sup> P.M.**

The DNR Land Survey Unit contacted the following offices for survey information on this corner:

Bureau of Land Management (BLM)  
MN Secretary of State  
Cass County Recorder, Auditor, Surveyor, and Highway Engineer  
U.S. Forest Service  
Itasca County Surveyor

- 1873 The U.S. General Land Office (GLO) survey notes and plat, on file in the MN Secretary of State's Office, describe this corner as a set post, from which:
- Pine stub 8" diam bears N 56° W, 25 links
  - Birch 6" diam bears N 34° E, 70 links
  - Pine stub 10" diam bears S 64° E, 20 links
  - Pine 14" diam bears S 26° W, 22 links
- 1926 R. A. Dahms found a wood stake @ road stationing 149+63; North 62 feet to corner.
- 1929 E. Juntunen, U.S. Forest Service, found a square stake, good condition, 4x4x42. Set Metal poster on 6" Jack Pine, on SW side and lines E-W & N-S. Corner bears N83°E, .18chs. ½ chain from highway back of cat-faced Jack pine. Claims to be original stake.
- 1940 Layton & Phelps USFS, used corner for survey, did not set ties.
- 1950 D. Cole, Engineer: plans indicate an old stake, 52 feet north of centerline at stationing 148+63 and 33' north of a control post.
- 1965 Morrison from USFS: place new tag on E. side of plantation post.
- 1993 J.R. Worcester (Engineer), indicates corner is assumed and north of station 148+70.
- 2021 March, the DNR Land Survey Unit conducted a search for the corner but did not find any original evidence. The corner position was computed from highway stationing records, after finding the P.I. and P.T. West of the corner position. Thence running northeasterly along the highway to station 148+63 (per Cole in 1950), and 52 feet north of highway stationing. A ¾" rebar with cap stamped "MN DNR LS 48249" was set flush in tree plantation. This position was found to measure:

2661.846 feet (GLO = 2640 ft) from the East Quarter Corner Section 18.

2674.281 feet (GLO = 2640.66 ft) from the North Quarter Corner Section 20.

Analysis of the available information led me to accept the computed position as the corner. The highway plan data was the best available evidence in making this corner determination. A last resort method of computing by Double Proportionate Measurement would have led to an unrealistic corner position due to the inconsistent distances in all directions.